
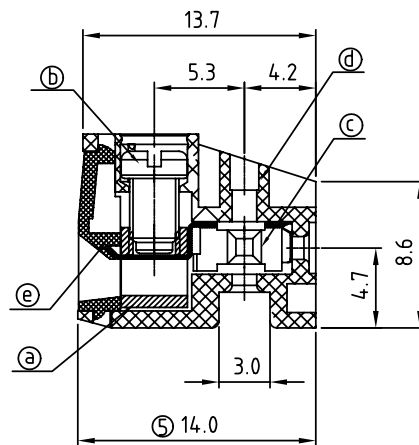
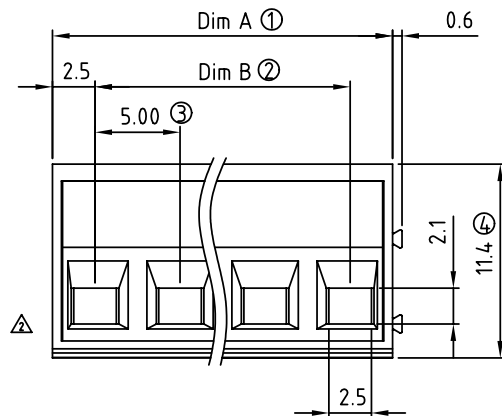


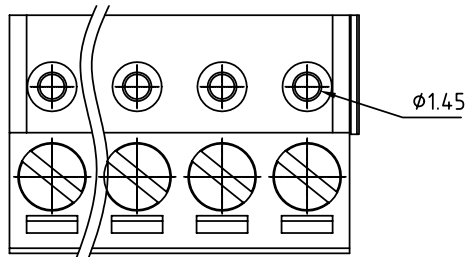

N = Number of poles
Dim A = N x 5.0
Dim B = (N - 1) x 5.0

	Dim A	Dim B
4-8p	±0.15	±0.15
9-12p	±0.20	±0.20
13-18p	±0.30	±0.30
19-24p	±0.40	±0.40

SIGN	DATE	DESCRIPTION	APPROVER
△	6/24'06	Torque standard is changed from 3.5Lb-In to 1.7Lb-In	Marvin
△	10/04'06	The structure is changed	Marvin
△	2009.08.25	Add the tolerance table	Jacke
△	2009.08.25	The Operating temperature is changed	Jacke
△	2009.08.25	Poles are changed from 2-24P to 4-24P.	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item a Clamp: Brass(CuZn) Ni plated
- Item b Terminal screw: Steel Zinc plating "-" slot type
- Item c Female contact: PhBz, Tin or Au plated.
- Item d Terminal (housing): Thermoplastic (UL94V-0)
- Item e Terminal (cover): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
- Solid wire(AWG): 16-22
- Stranded wire(AWG): 16-22
- △ Torque(Lb-In): 1.7
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- △ Operating temperature: -40°C to +115°C
- Safety Approval: cULus

TT xx 01 x 1 xxxx G

△ 04	4 CONTACTS	0	Black (RAL9005)	0000	Standard @ Logo	RoHS
05	5 CONTACTS	2	Red (RAL3001/D)	000A	Standard ANY Logo	Pb<40,000ppm
...	...	3	Orange(RAL2011/P)	Any special item by		
24	24 CONTACTS	4	Yellow(RAL1018/A)	customer request,		
		5	Green(RAL6018/T)	please contact sales		
		6	Blue (RAL5015/A)	department.		
		8	Grey(RAL7035/D)			

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TT - 5.0mm Series Solid block						
PART NO.	TTxx01x1xxxxG			DWG NO.	8TT0301		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacke 2009.08.25	Jacke 2009.08.25		UNIT: mm	X. ±0.50	
					SCALE: NONE	X.X ±0.30	
						X.XX ±0.10	
				SHEET: 01/01	REV.: E	X° ±1°	