

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

LOC

DIST

REVISIONS

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

AD

00

P

LTR

DESCRIPTION

DATE

DWN

APVD


F

REVISED PER ECO-14-003814

12JUN2014

NK

RH

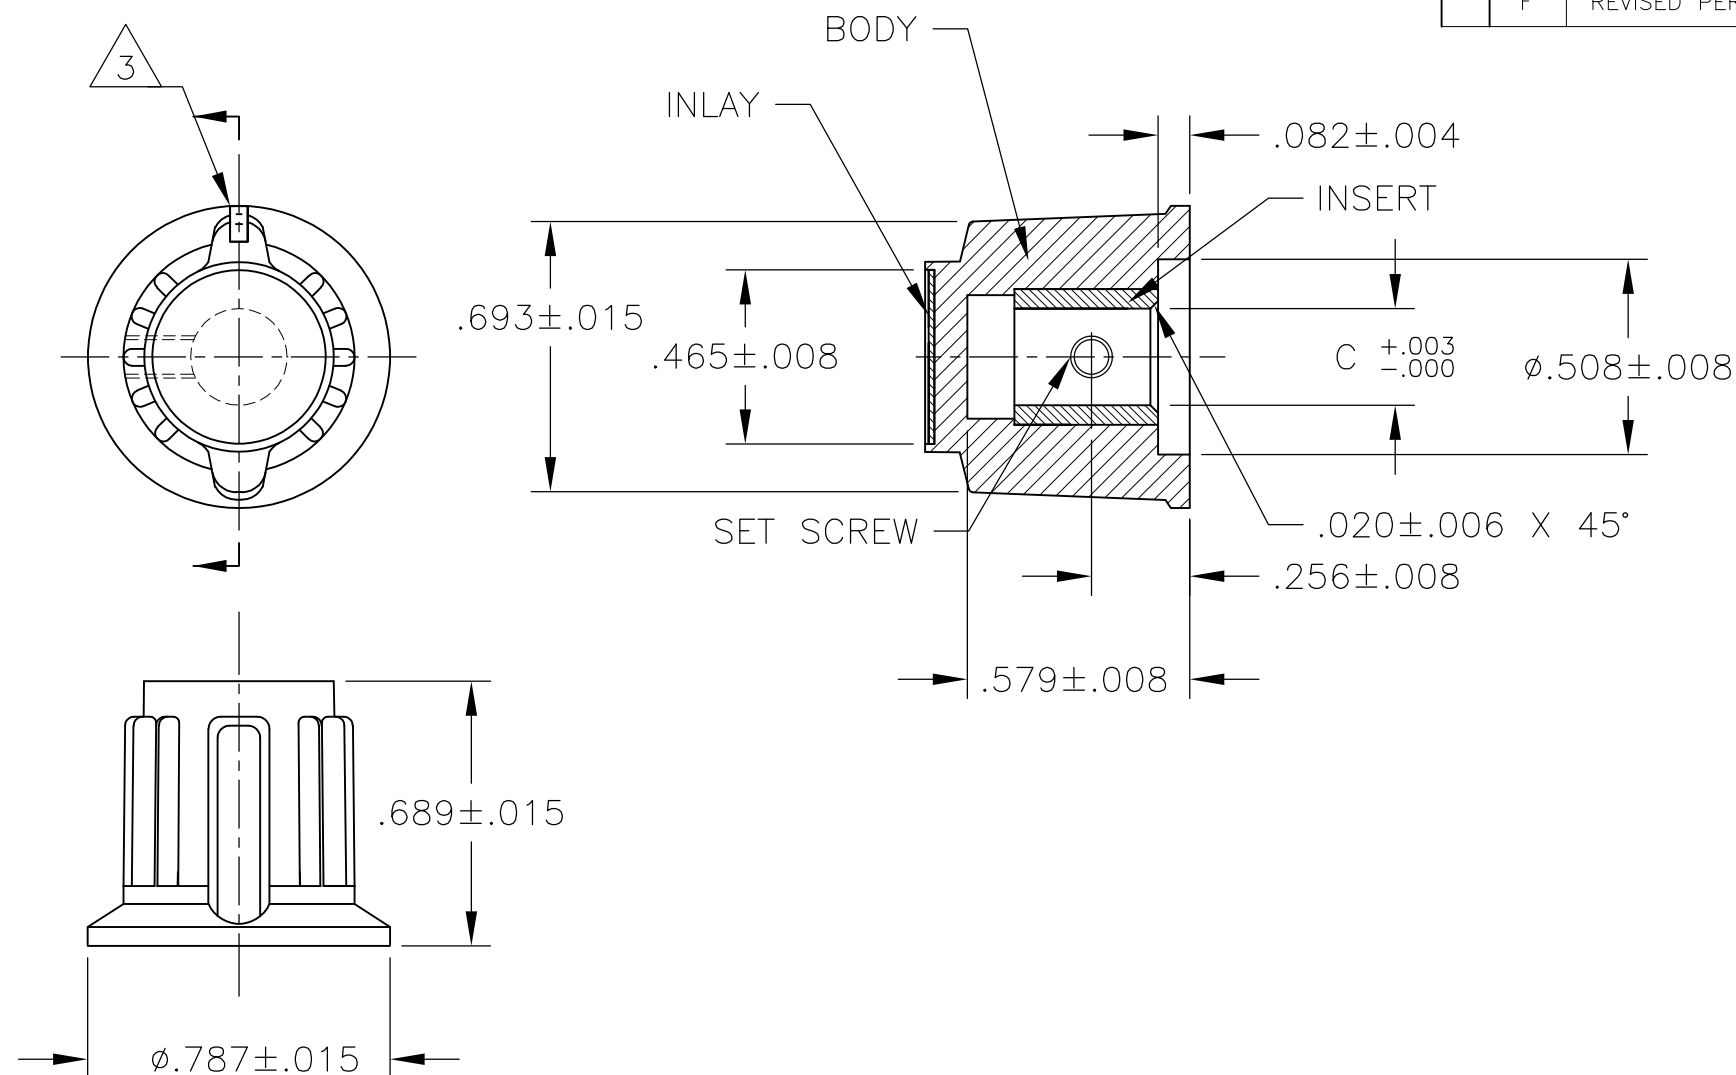


- 1 MATERIAL AND FINISH:
INLAY: ALUMINUM .016 THK., CLEAR ACYLIC COATED
BODY: PHENOLIC, BLACK, HIGH GLOSS FINISH (SPE/SPI#A2)
SET SCREW: 303 STAINLESS STEEL, BLACK ANODIZED
INSERT: BRASS

2 SET SCREW ARE UNC-2A, CUP POINT, HEX SOCKET TYPE.

3 INDICATOR, PAINTED FULL, COLOR: WHITE; .030±.010 DEEP

4 RETENTION FORCE OF INSERT IN KNOB BODY: 50 LBS MIN.

OBSOLETE	#6-32 X .125	.126	PKAP50B1/8	1-1437624-9
	#6-32 X .125	.251	PKAP50B1/4	1-1437624-8
2 SET SCREW		C SHAFT HOLE	MODEL NUMBER	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	25MAR03	TE Connectivity			
DIMENSIONS: INCHES		CHK —	—	NAME PKA KNOB SERIES STANDARD			
		APVD —	—				
		PRODUCT SPEC —					
		APPLICATION SPEC —					
MATERIAL —		FINISH —		SIZE A3	CAGE CODE 00779	DRAWING NO C-1-1437624-8	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 3	REV F	

