


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		C1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

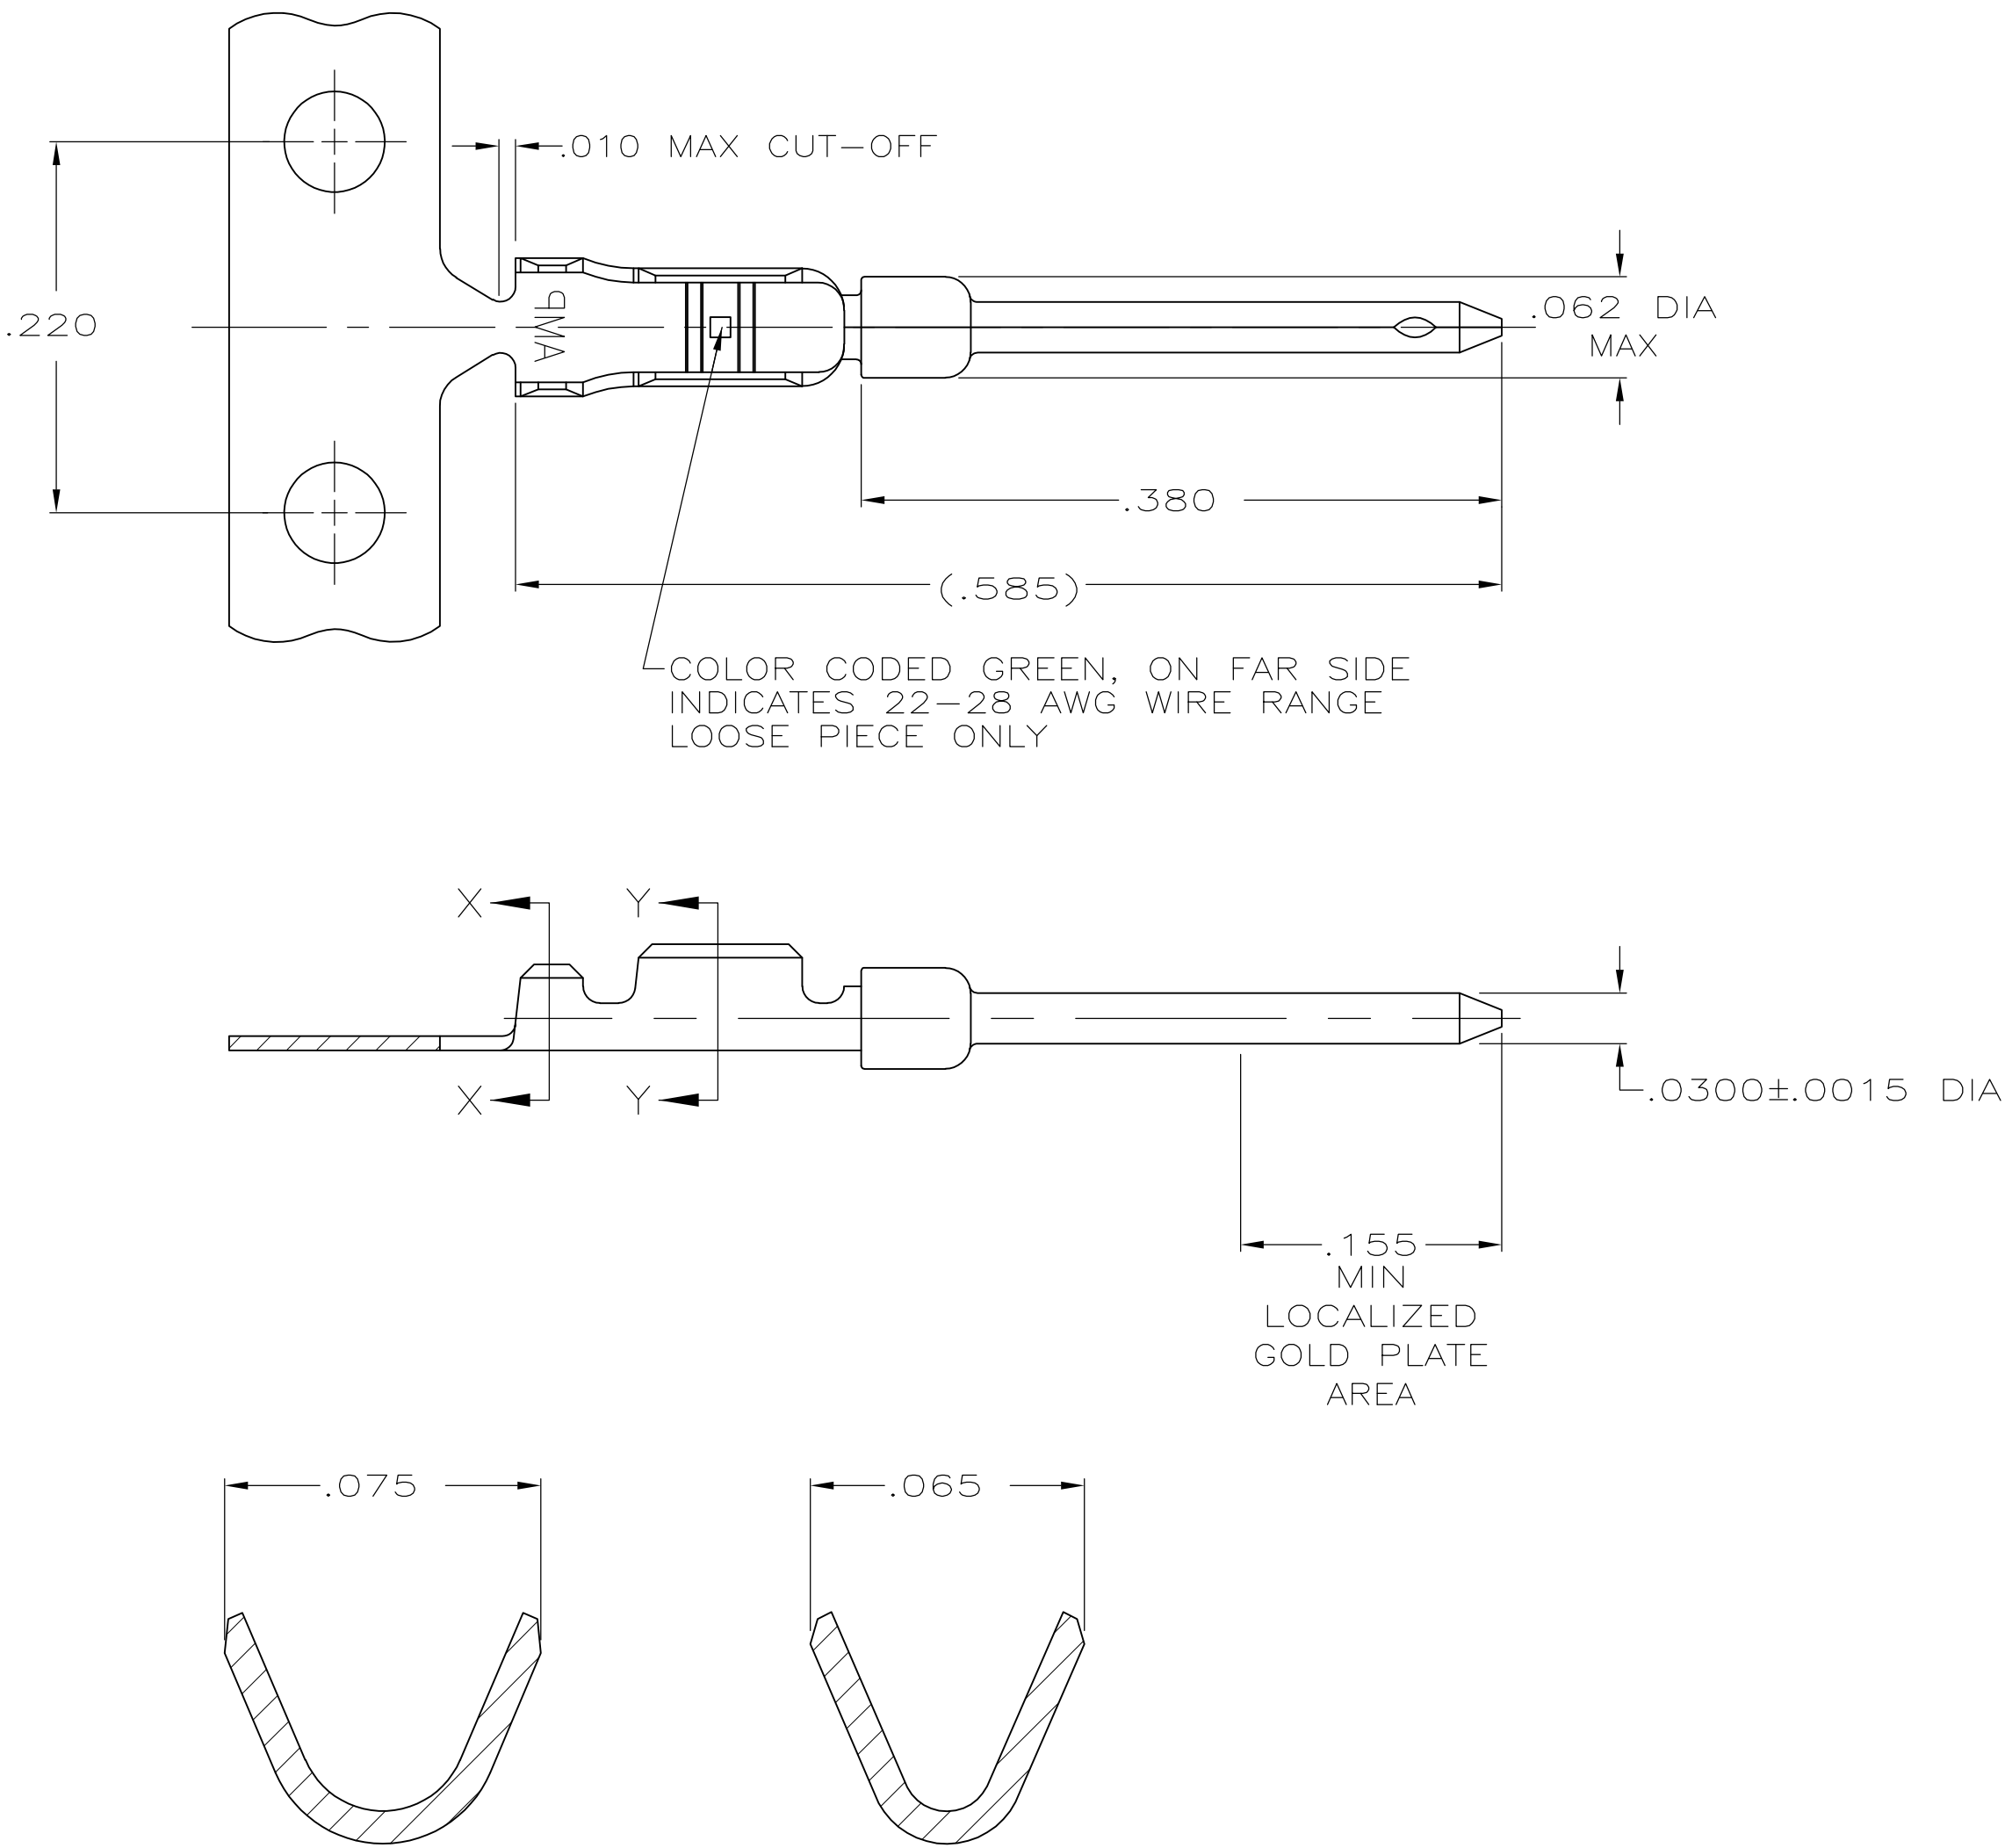

- 1 FOR MINI APPLICATOR.
- 2 FOR HAND TOOL USE ONLY.
3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- 4 .000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. .000100 MIN TIN ON WIRE AND INSULATION BARRELS, .000030 MIN GOLD ON LOCALIZED GOLD PLATE AREA.
OR
.000050 MIN NICKEL UNDERPLATE ON ENTIRE CONTACT. .000100 MIN TIN ON WIRE AND INSULATION BARRELS, GOLD FLASH OVER PALLADIUM-NICKEL, .000030 MIN TOTAL IN LOCALIZED GOLD PLATE AREA.
- 5 GOLD FLASH IN LOCALIZED GOLD PLATE AREA, .000100 MIN TIN IN WIRE & INSULATION BARRELS, BOTH OVER .000050 MIN NICKEL UNDERPLATE.
- 6 SMALL PACK PACKAGING.

		LOOSE PIECE	 1658670-5
		LOOSE PIECE	1658670-4
		STRIP	1658670-3
		LOOSE PIECE	1658670-2
		STRIP	1658670-1
FINISH	USE	TYPE	PART NUMBER

SECTION X-X
INSULATION BARREL
SCALE 25:1

SECTION Y-Y
WIRE BARREL
SCALE 25:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± 2°
FINISH SEE TABLE

MATERIAL
BRASS

DWN L. VARELA - DOCK5 11-17-04
CHK J. GERACE 11-17-04
APVD M. WALMSLEY 11-17-04

PRODUCT SPEC
108-1268

APPLICATION SPEC
114-10001

WEIGHT -

CUSTOMER DRAWING

NAME
PIN CONTACT, 22-28 AWG, 22 DF, AMPLIMITE -

SIZE A2
CAGE CODE 00779
DRAWING NO C-1658670
SCALE 10:1

RESTRICTED TO -
SHEET 1 OF 1
REV C1

TE Connectivity

1658670

1471-9 (3/11)