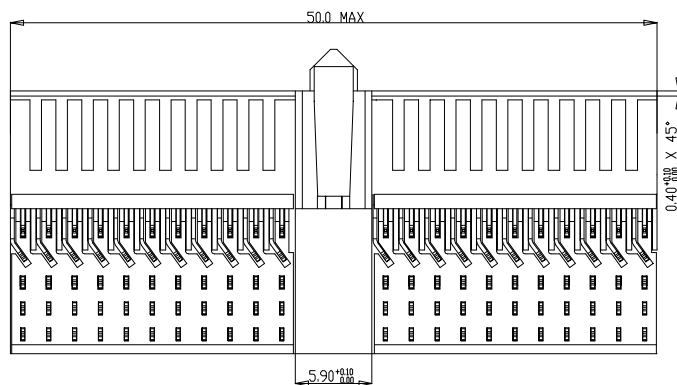
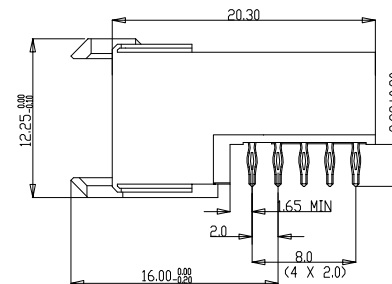
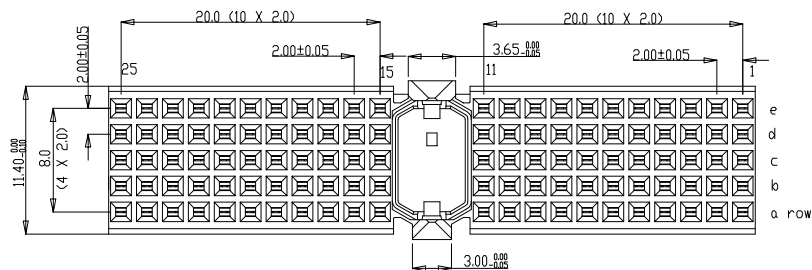


PERFORMANCE CHARACTERISTICS

CURRENT RATING
1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
OPERATING TEMPERATURE -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE :0.75 N MAX /CONT
EXTRACTION FORCE: 0.15 N MIN /CONT
INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR
(REF DWG No. BS.C.201844,003)
- THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

Material				Spec ref			
Mat code				tolerance			
Heat treat				projection			
Plating/Finish				MM			
rev	ecn no	dr	date	Dr	4 2 92	J.V.B	
A	CONV	KN	14-9-91	Eng			
B	105-0093	MINI	08/06/05	Chr			
C	3005-0278	Kason	02/08/05	Appr			
D	3006-0274	Kason	05/07/06				
E	3007-0362	Kason	05/09/07				
F	3008-0159	Nichor	06/02/08				
G	3009-0110	Nichor	07/02/10				
Product Family				size			
Model Name				Scale			
Model Revision				REL Level			
MPACS 5+2R RA RCP				BS.C.201418,010			
CONN TYPE A				Rev.			
HMER10P5A100----				G			
Prd/E file				catalog no			
HMER10P5A100----				CUSTOMER DRAWING			
sheet 1 of 1							

PDM: Rev.9

STATUS: Released

Printed: Mar 15, 2011