






ITEM NO.	MATERIAL
40585-3000	POLYESTER, UL94V-0, GLASS-FILLED COLOR: NATURAL. (A)

NOTES:

1. THIS HOUSING ACCEPTS MOLEX TERMINAL NO'S. 1219, 1220, 42824, AND 42825.
2. THIS HOUSING IS HERMAPHRODITIC.
3. CENTER CIRCUIT IS .050/(1.27) FORWARD FROM THE OTHER (4) POCKETS FOR FIRST MAKE LAST BREAK GROUND CIRCUIT.

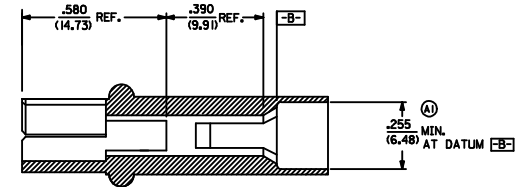


SECTION B-B

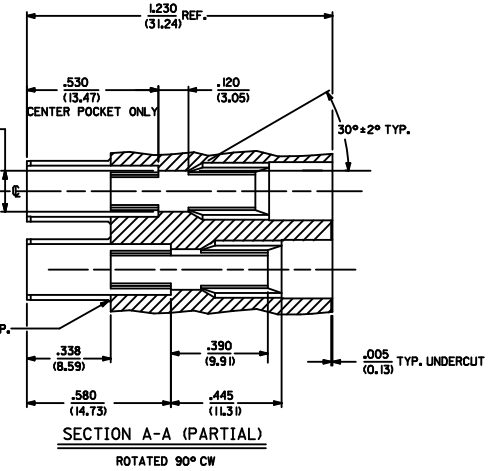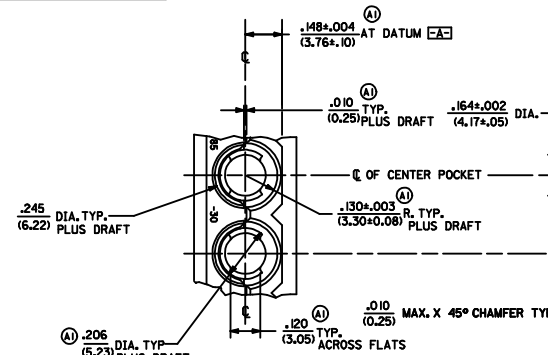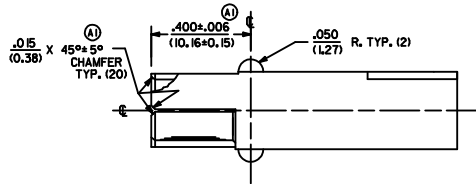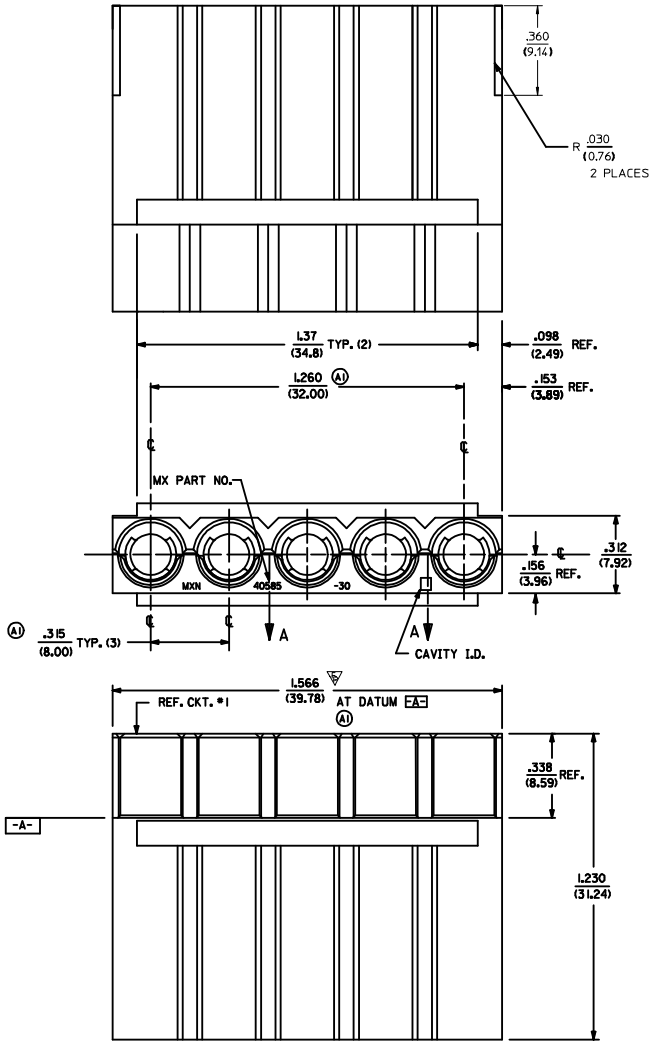

SECTION A-A (PARTIAL)

ROTATED 90° CW

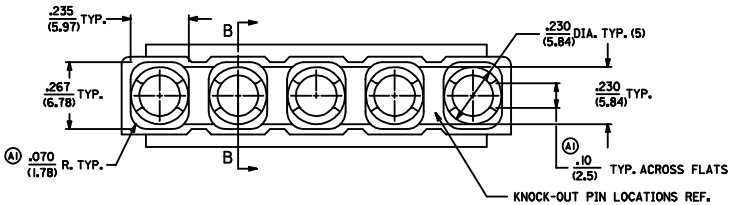

ADD .030" RADII IEC NO. UCP2013-1778 DRAWN: HAH 2012/11/02 CHKD: JELL 2012/11/02 APPR: FSN TH 2013/10/12 REV DESCRIPTION A2	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 4:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION	TITLE 5 POSITION POWER CONN. HERMAPHRODITIC (8.00) / .315 CTRS molex MATERIAL NO. SEE CHART DOCUMENT NO. SD-40585-30** SHEET NO. 1 OF 1
	▽=0	mm	INCH	DRAWN BY	DATE				
	▽=0	4 PLACES ±	---	DMS	1991/11/12				
	▽=1	3 PLACES ±	±.010	CHECKED BY	DATE				
		2 PLACES ±	±.025	SBB	1991/11/12				
		1 PLACE ±	±.036	APPROVED BY	DATE				
		0 PLACE ±	±						
		ANGULAR AR ±1/2°		MATERIAL NO.		DOCUMENT NO.			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE					
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					