


Series 800

PCB connectors 2.54 mm

Single row / double row / surface mount

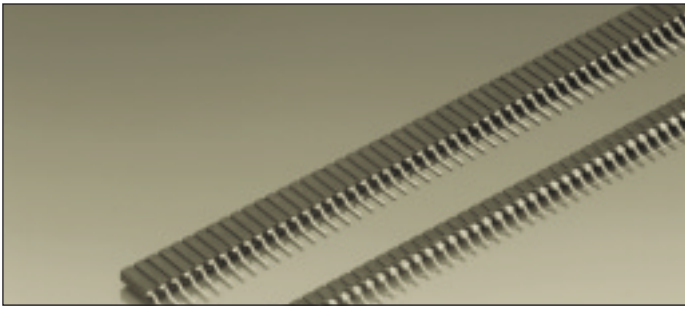

Receptacles, surface mount

Accept square pins $\square$ 0.635 mm
and round pins $\varnothing$ 0.70–0.80 mm




For corresponding pin connectors see
pages 30 to 35

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-40-001
for a double row version with 8 pins per row becomes:
803-91-**016**-40-001

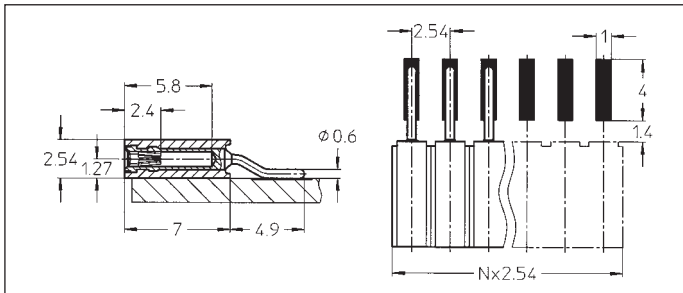


801-91-xxx-40-001

801-93-xxx-40-001

801-99-xxx-40-001

SMD receptacle: single row
parallel mount

Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48 and 50

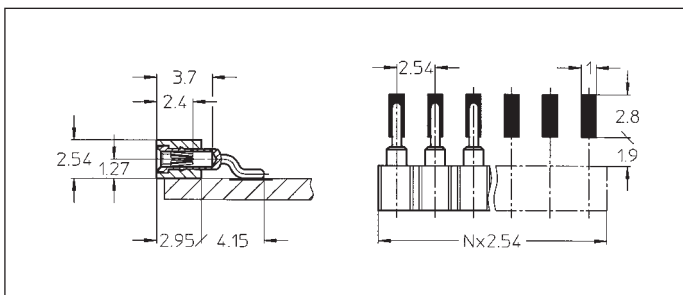

801-91-xxx-40-002

801-93-xxx-40-002

801-99-xxx-40-002

SMD receptacle: single row, low
profile, parallel mount

Availability from: 1 to 32 contacts
Standard number of contacts 32