

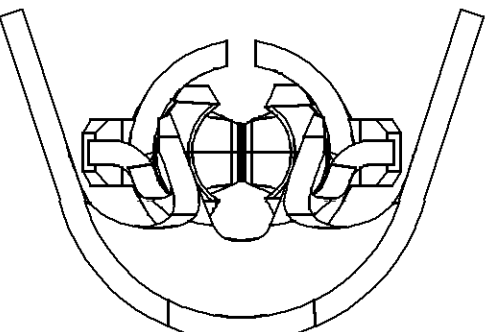



SYMBOL DEFINITION						MISSING SYMBOLS																						
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ○ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.						DWS STATUS						ZONE		REVISION HISTORY				AUTH		DR		AP/D						
						DATE	STG	REV	N/P	CHG																		
TOTAL NO OF INSPECTIONS REQUIRED						6	NO MISSING SYMBOL NUMBER						05N003		R	01	-	-	ALL PARTS - REDRAWN TO PD				246857		JBR	RCH	JDY	
													21DE06		R	02	-	-	MATERIAL FOR P/N 12146576 AND 12146501 WAS PW3639285 MATERIAL FOR P/N 12124587,12124582, 12089307,12089040 WAS P1519285				282294		TMF	TMF	TM	
LAST NO. USED						6																						

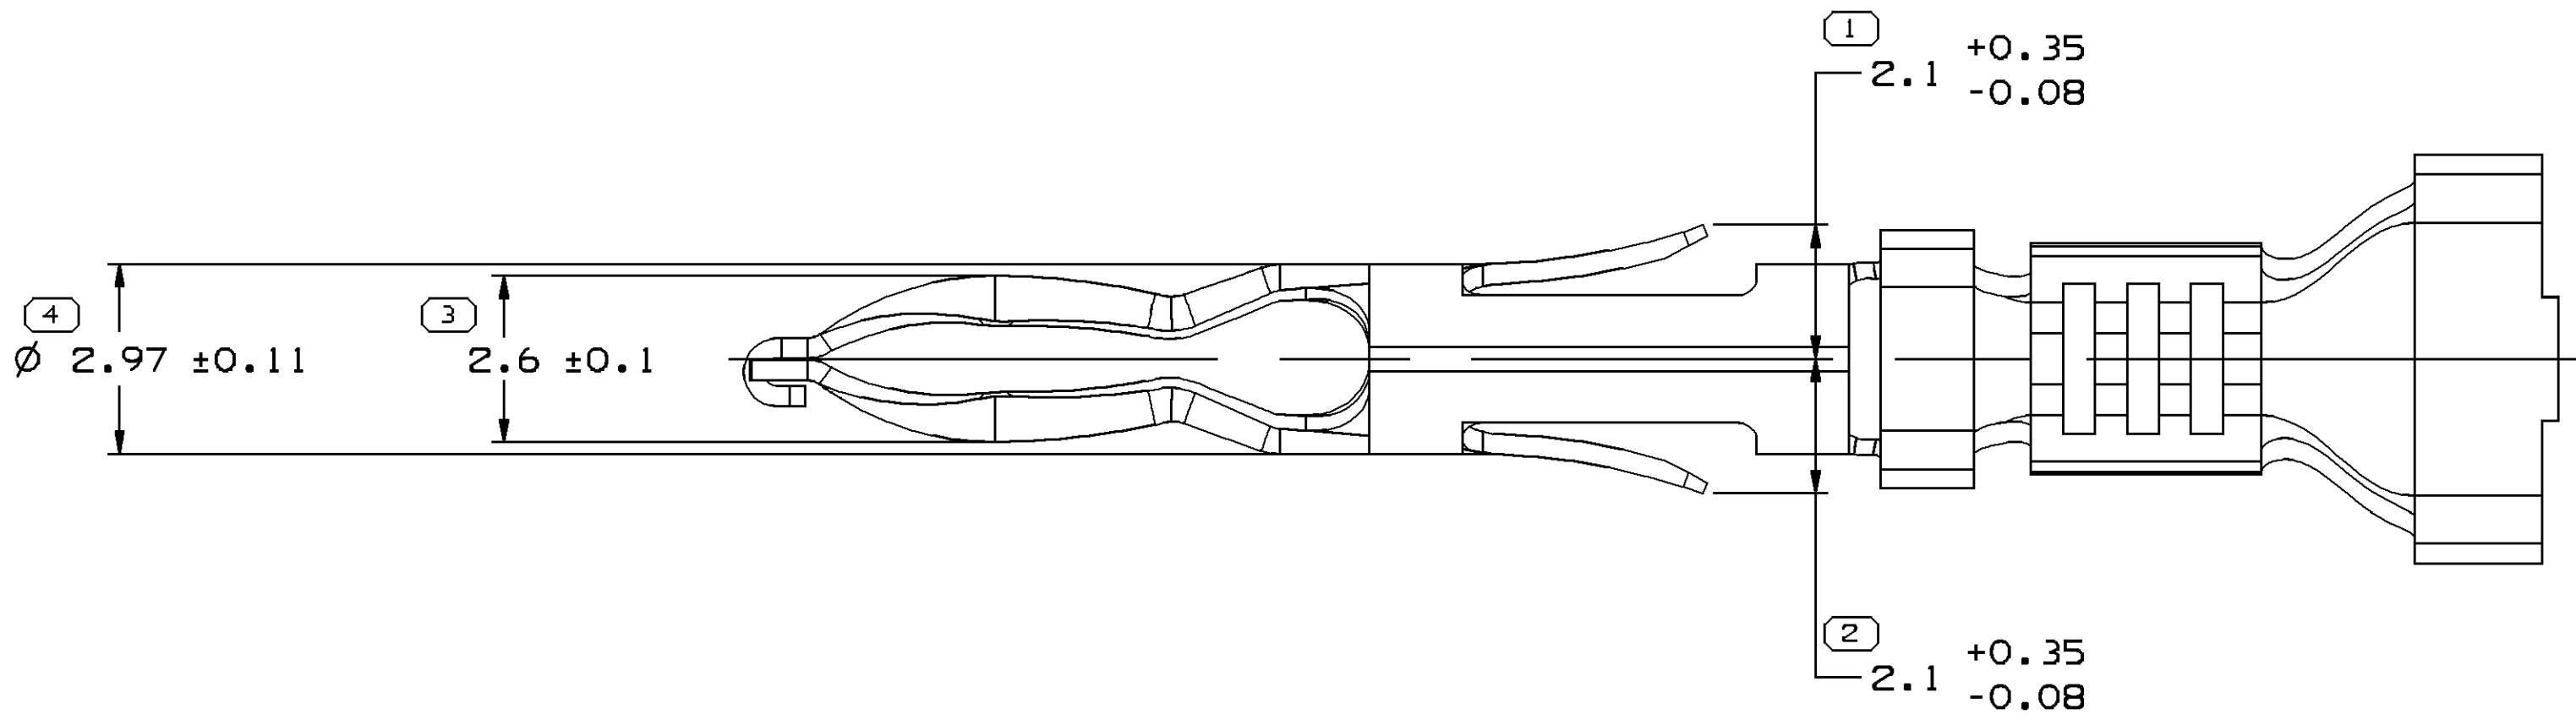


TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN

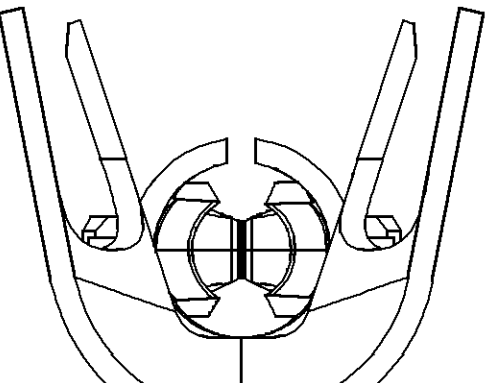


TYPE 103
SAME AS TYPE 101
EXCEPT AS SHOWN

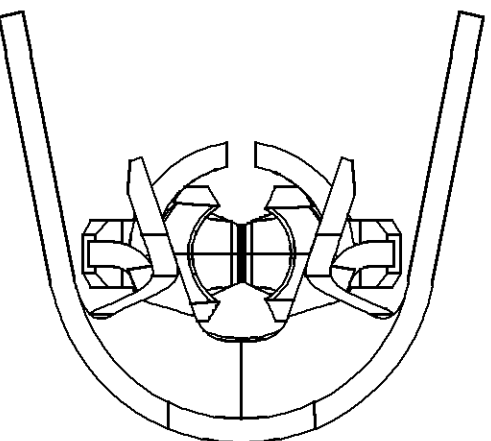


TYPE 104
SAME AS TYPE 102
EXCEPT AS SHOWN

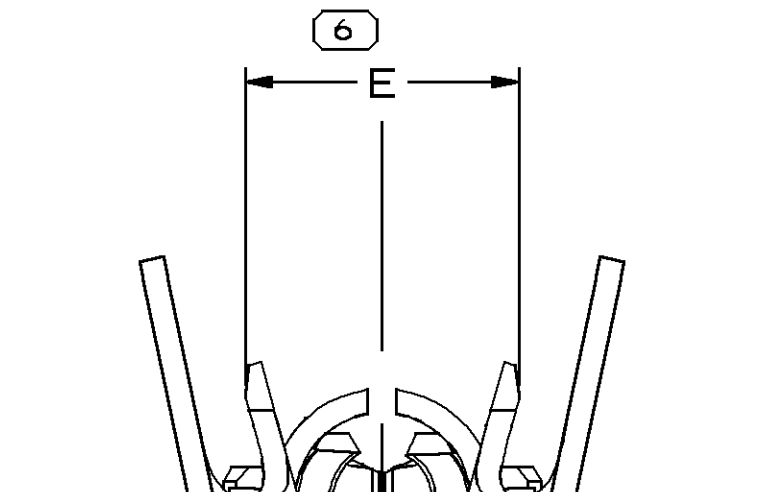

TYPE 101

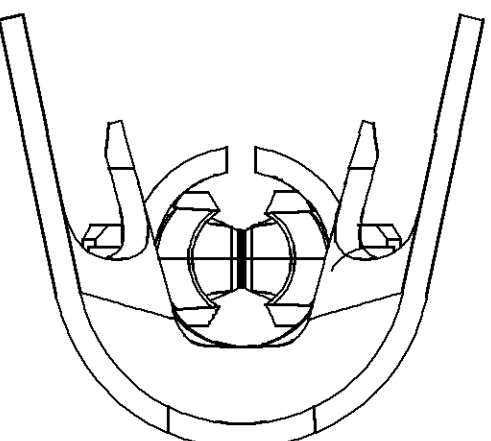


TYPE 105
SAME AS TYPE 101
EXCEPT AS SHOWN

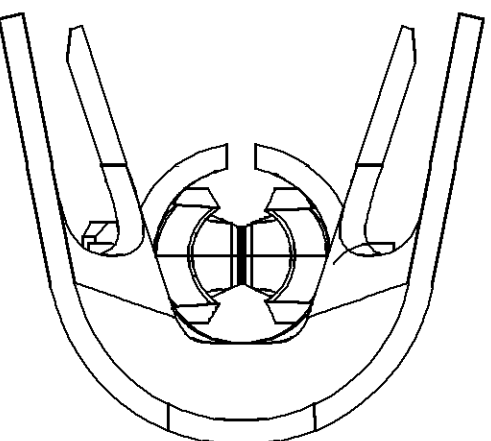

TYPE 106
SAME AS TYPE 105
EXCEPT AS SHOWN

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE
SERIES NUMBER (PO1, PO2, PO3, ETC).
- TERMINAL DESIGNED FOR 3MM² CABLE.
TERMINAL IS RATED AT 20 AMPERES. DO NOT EXCEED
RATED CURRENT.



12146576	I	R	B2	-	0.320X36.53	M3639285	0.35-0.22	1.86	23	102	2.20	○
12146501	I	R	B2	-	0.320X36.53	M3639285	0.8-0.5	3.11	19	104	3.00	○
12124587	I	R	B2	-	0.320X36.53	M1574285	SEE NOTE 3	3.96	11	106	4.60	○
12124582	I	R	B2	-	0.320X36.53	M1574285	2.0-1.0	3.96	15	105	3.60	○
12089307	I	R	B2	-	0.320X36.53	M1574285	0.35-0.22	1.86	23	102	2.20	○
12089306	I	R	B	OBSELETE	0.320X36.53	P-1519285	SEE NOTE 3	3.96	11	103	4.60	○
12089305	I	R	B	OBSELETE	0.320X36.53	P-1519285	2.0-1.0	3.96	15	101	3.60	○
12089040	I	R	C2	-	0.320X36.53	M1574285	0.8-0.5	3.11	19	104	3.00	○
PART NO	STG	REV	N/P	STATUS	MAT'L SIZE	MAT'L SPEC	CABLE SIZE (MM ²)	MAX. CABLE DIA.	I.D.NO.	TYPE	E±0.4	

(4) PROCESS SENSITIVE DIMENSION			
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED			
DIMENSIONAL RANGE (MM)	CHART	D	
FROM 0 TO 12	>12		
TOLERANCE UNLESS OTHERWISE SPECIFIED			
±0.1	±0.2		
ANGULAR TOLERANCE 22°			

DWG TYPE		PART DRAWING	
STYLE			
VOLUME 1047		DISTR CODE	
ROUTING		D	
UNLESS OTHERWISE SPECIFIED THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS MODIFIED BY THE M SCHEM. DIMENSIONING AND TOLERANCING ADDENDUM-2001. SEPARATE RATINGS OF FEATURES MAY BE BASED SEPARATELY PERMILES OF DATUM REFERENCES.			
ALL DIMENSIONS ARE IN MILLIMETERS			
REFERENCE			
THIRD ANGLE PROJECTION		DO NOT SCALE	
USE MATH DATA		 NX	

DELPHI				
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH				
DR			DATE	
APVD1 J. GAYALDON			05N003	
APVD2 R. CHACON			05N003	
APVD3 J. DEL VAL			07N003	
APVD4				
APVD5				
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001				
MATERIAL SEE CHART				
DRAWING NAME TAXI TERM M W/P I SEALED TANG				
DRAWING NUMBER 12010088				
SIZE A0	SCALE 10:1	FRAME NO 1 OF 1	SHEET NO 1 OF 4	STG R
				REV 02
				N/P -