
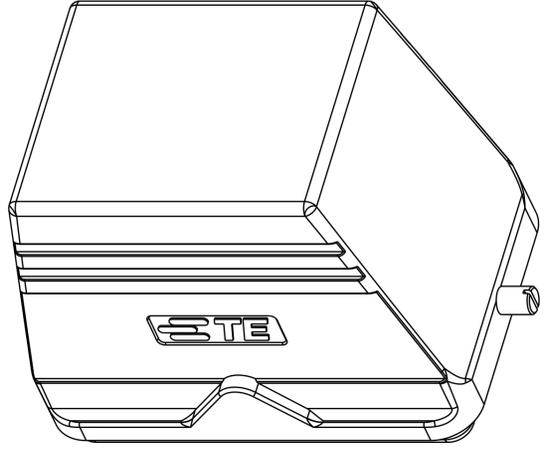
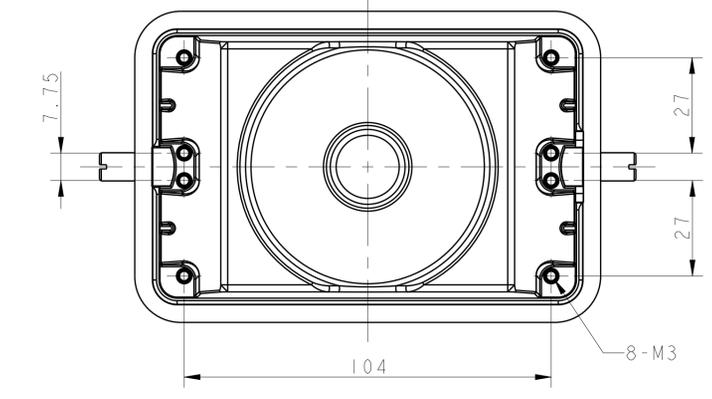
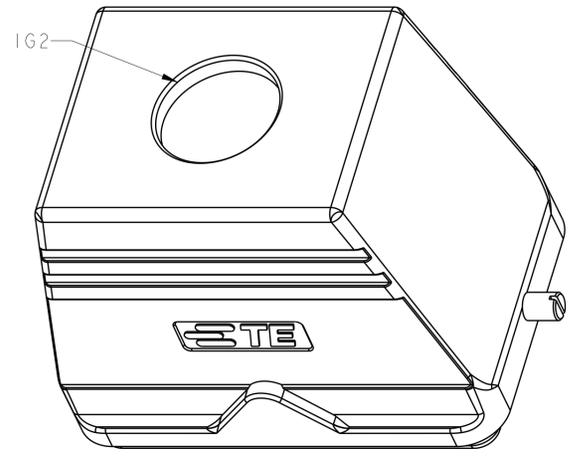
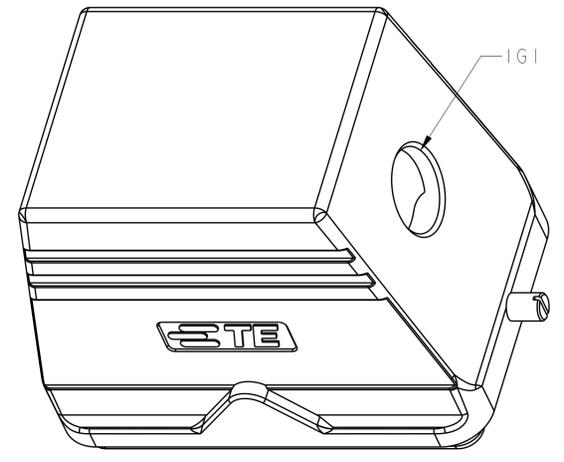
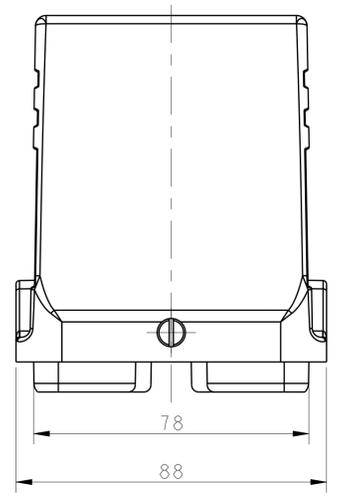


REVISIONS					
P.	LTN	DESCRIPTION	DATE	DMN	APVD
A		INITIAL RELEASE	08JUN2015	DL	CW
A1		ECR-15-017068	23NOV2015	DL	CW


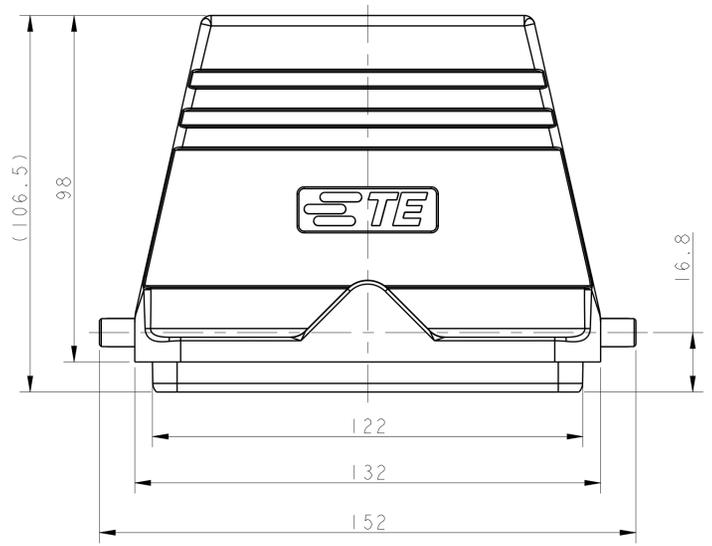


TYPE 2: H48B HOOD, SIDE ENTRY, 2 EAR  
 OTHER SPEC REFER TO TYPE 1

TYPE 3: H48B HOOD, TOP ENTRY, 2 EAR  
 OTHER SPEC REFER TO TYPE 1

类型2: H48B上壳, 侧出, 2耳  
 未注规格参照类型1

类型3: H48B上壳, 顶出, 2耳  
 未注规格参照类型1

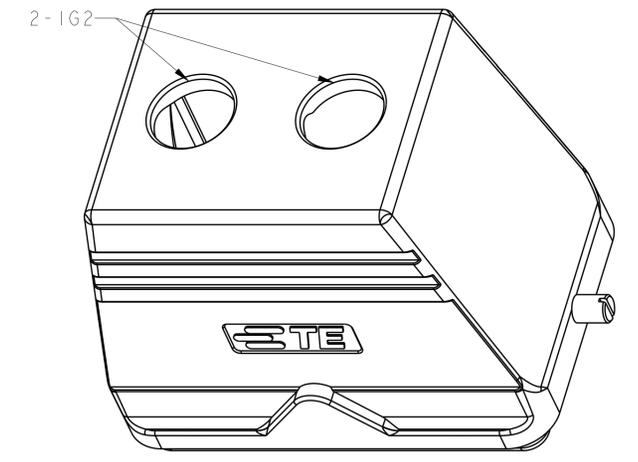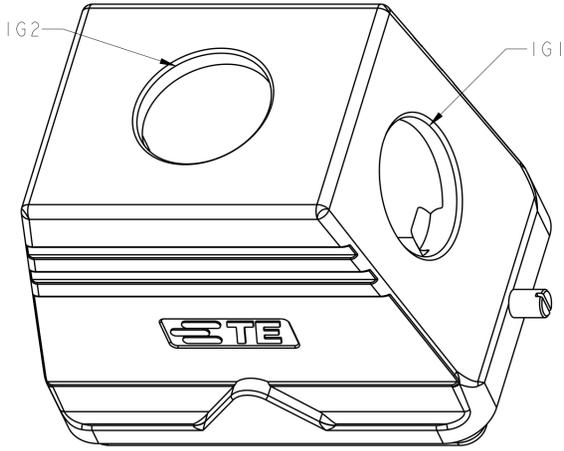


TYPE 4: H48B HOOD, SIDE/TOP ENTRY, 2 EAR  
 OTHER SPEC REFER TO TYPE 1&TYPE 2

TYPE 5: H48B HOOD, TOP ENTRY (2 HOLE), 2 EAR  
 OTHER SPEC REFER TO TYPE 1

类型4: H48B上壳, 侧顶出, 2耳  
 未注规格参照类型1和类型2

类型5: H48B上壳, 顶出(2孔), 2耳  
 未注规格参照类型1

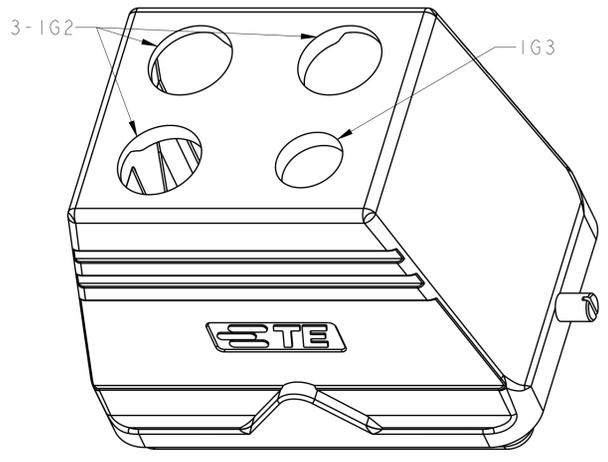

TYPE 6: H48B HOOD, TOP ENTRY (4 HOLE), 2 EAR  
 OTHER SPEC REFER TO TYPE 1

类型6: H48B上壳, 顶出(4孔), 2耳  
 未注规格参照类型1

TYPE 1: H48B HOOD, NO ENTRY, 2 EAR  
 类型1: H48B上壳, 无线孔, 2耳

T10X0480000-000	TYPE 1	H48B-TG/S-RO-XX	-	-	-	
T1310480125-000	TYPE 2	H48B-TS-RO-M25	M25	-	-	
T1310480129-000		H48B-TS-RO-PG29	PG29	-	-	
T1310480132-000		H48B-TS-RO-M32	M32	-	-	
T1310480136-000		H48B-TS-RO-PG36	PG36	-	-	
T1310480140-000		H48B-TS-RO-M40	M40	-	-	
T1310480142-000		H48B-TS-RO-PG42	PG42	-	-	
T1310480150-000		H48B-TS-RO-M50	M50	-	-	
T1320480129-000		TYPE 3	H48B-TG-RO-PG29	-	PG29	-
T1320480132-000			H48B-TG-RO-M32	-	M32	-
T1320480136-000			H48B-TG-RO-PG36	-	PG36	-
T1320480140-000	H48B-TG-RO-M40		-	M40	-	
T1320480142-000	H48B-TG-RO-PG42		-	PG42	-	
T1320480150-000	H48B-TG-RO-M50		-	M50	-	
T1320480163-000	H48B-TG-RO-M63		-	M63	-	
T1320484040-000	TYPE 4	H48B-TG/TS-RO-M40/M40	M40	M40	-	
T1320480225-000	TYPE 5	H48B-TG-RO-2M25	-	2-M25	-	
T1320482520-000	TYPE 6	H48B-TG-3M25M20	-	3-M25	M20	
PART NUMBER 料号	TYPE 类型	PART DESCRIPTION 描述	IG1 螺纹孔1	IG2 螺纹孔2	IG3 螺纹孔3	

NOTES:  
 1. TECHNICAL CHARACTERISTICS:  
 BODY MATERIAL: DIE CAST ALUMINIUM ALLOY  
 SURFACE TREATMENT: POWDER-COATED, GRAY  
 OPERATION TEMPERATURE: -40-+125°C  
 DEGREE OF PROTECTION: IP65 (MATED)

注释:  
 1. 技术参数:  
 主体材料: 铝合金  
 表面处理: 粉末喷涂, 灰色  
 工作温度: -40-+125°C  
 防护等级: IP65(配合)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MATERIAL:		FINISH:		WEIGHT:		CUSTOMER DRAWING	
mm	0 PLC	±									
	1 PLC	±									
	2 PLC	±									
	3 PLC	±									
	4 PLC	±									
	ANGLES	±									