

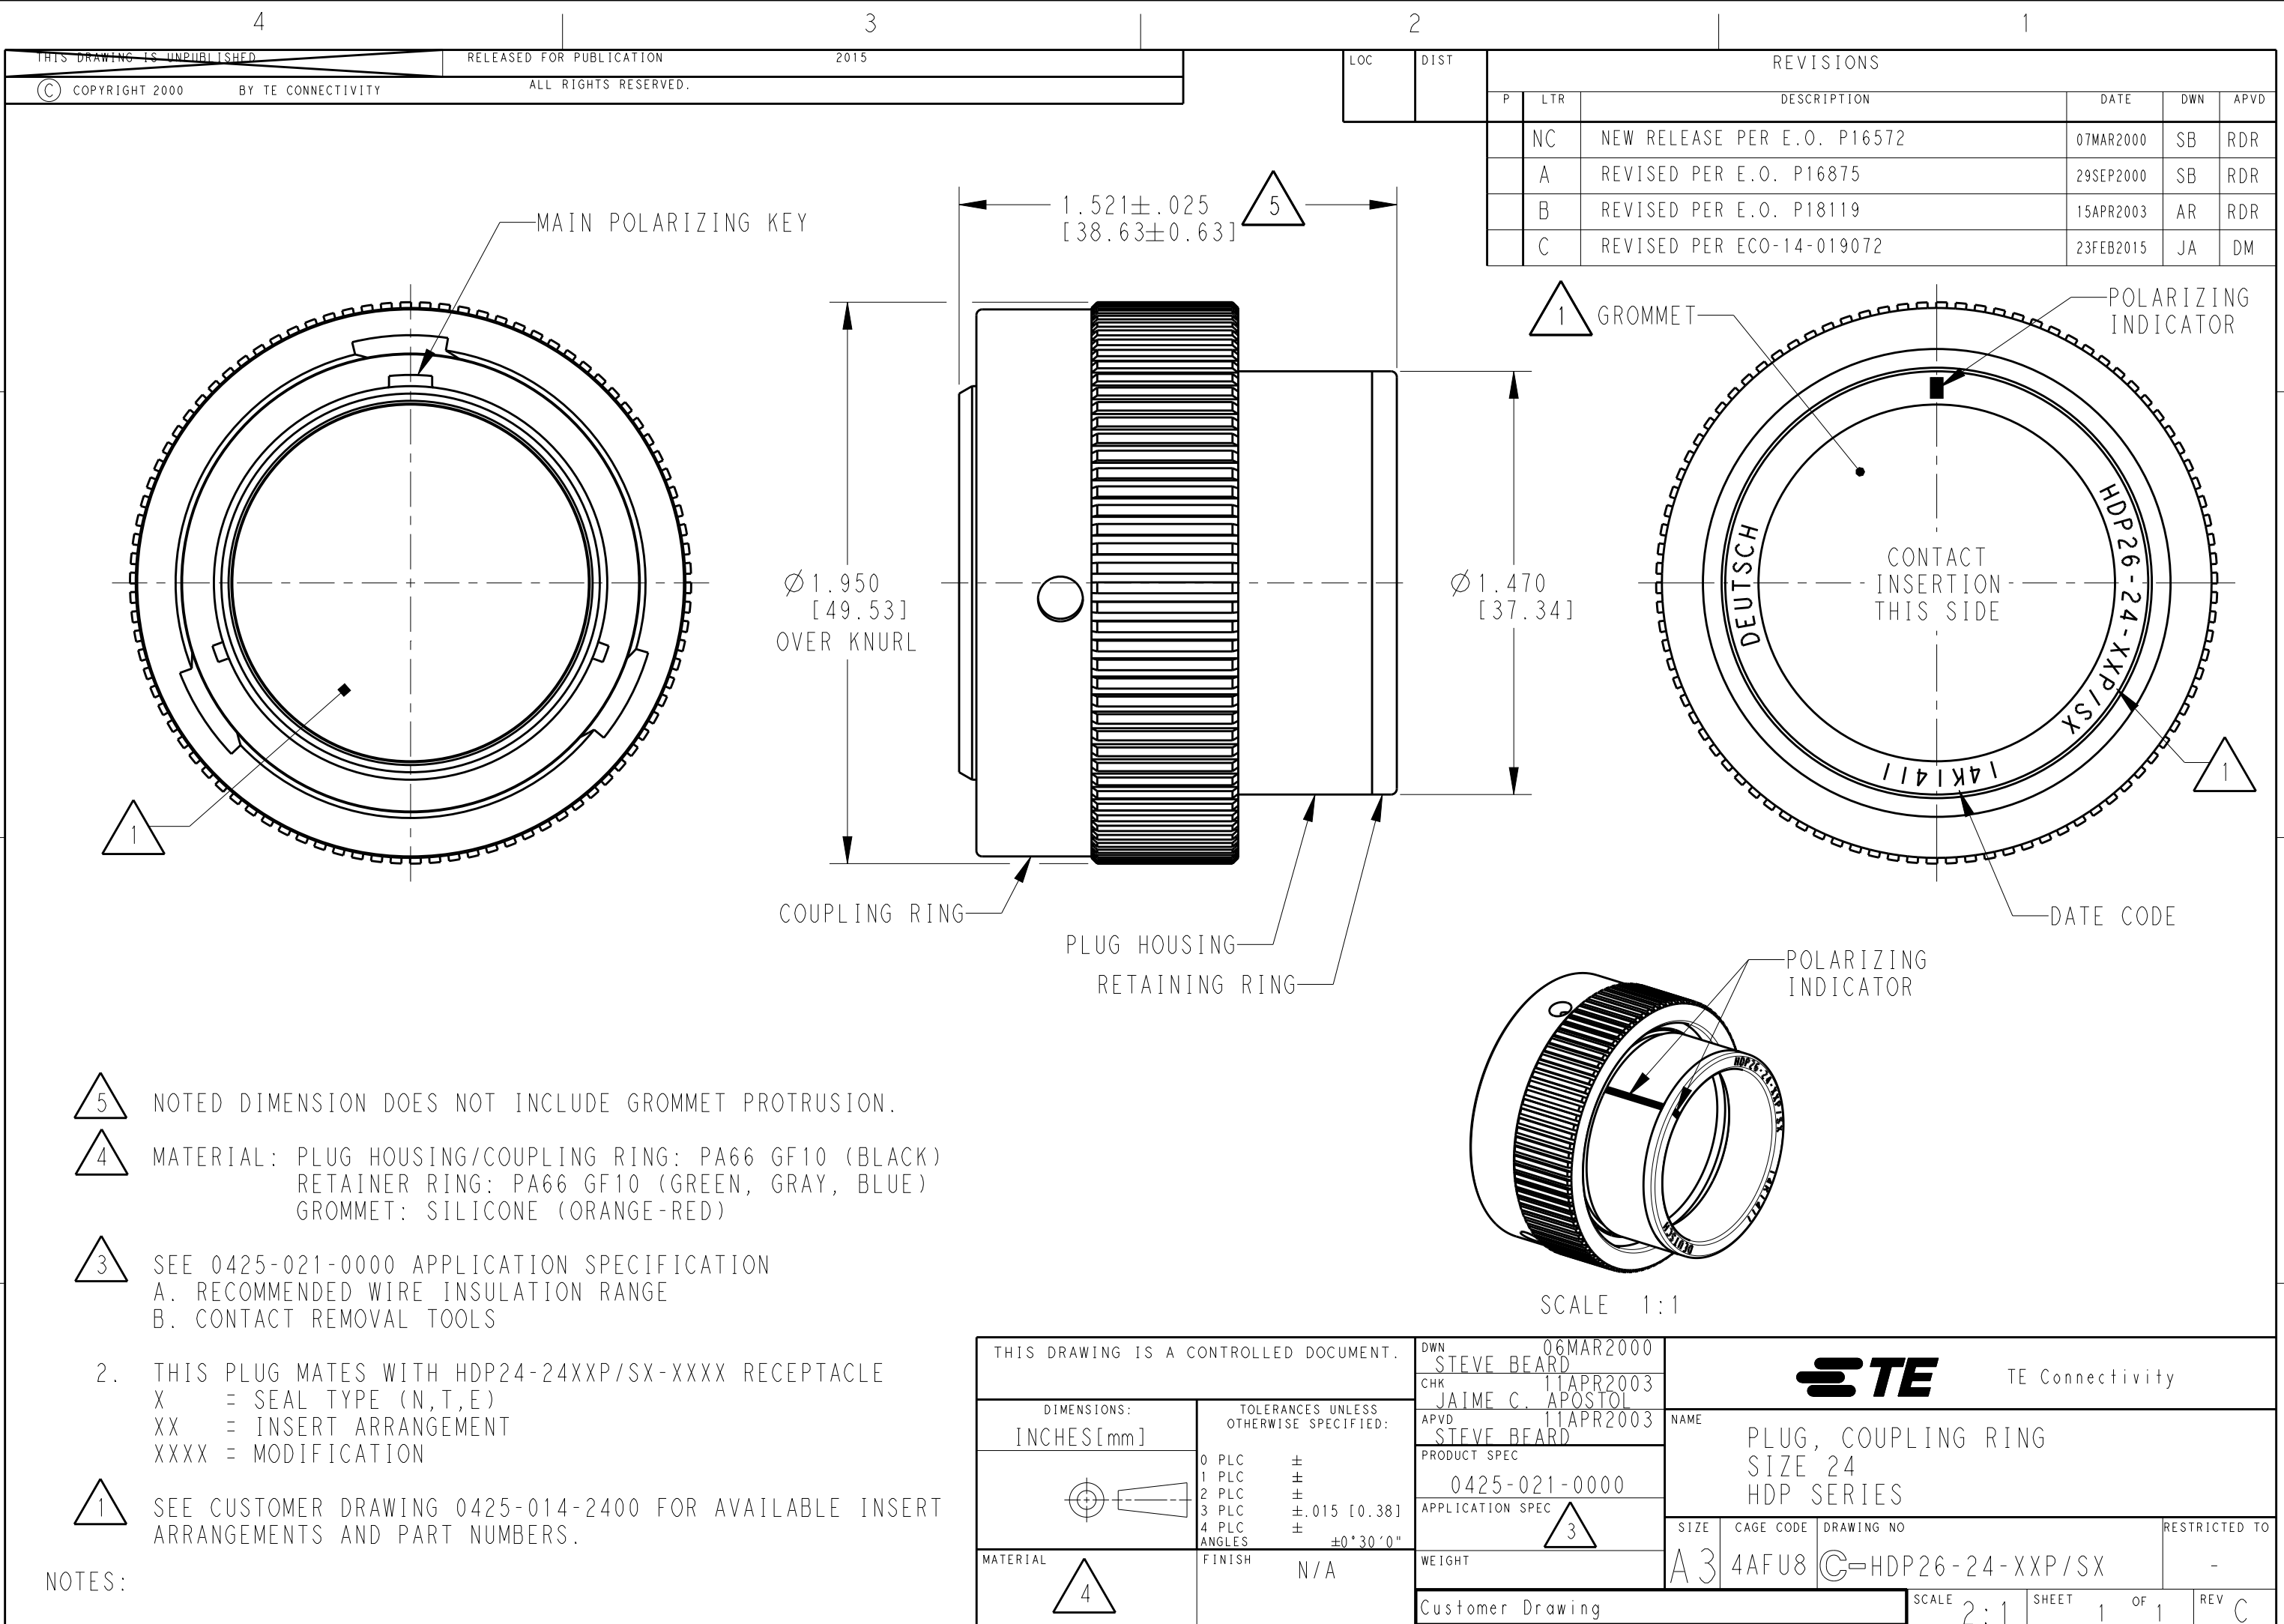
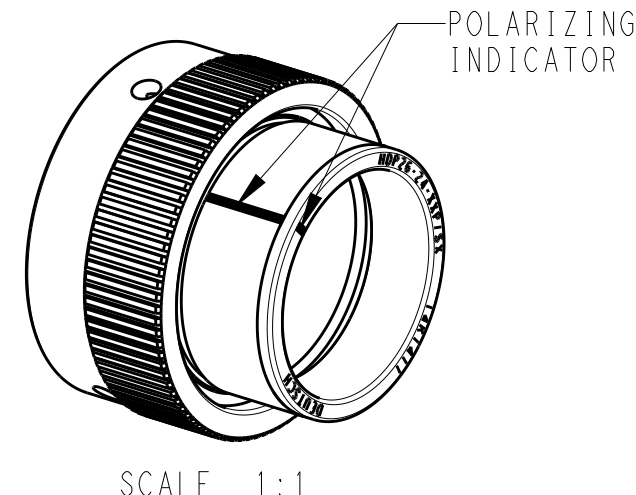
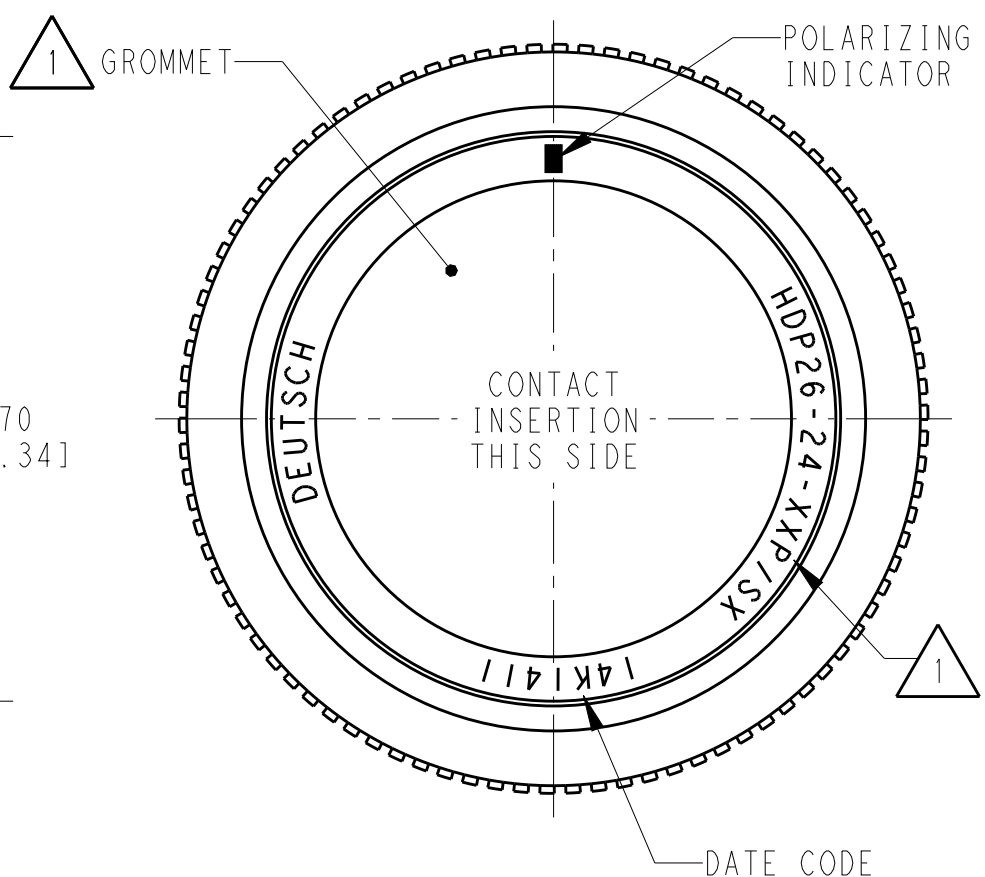


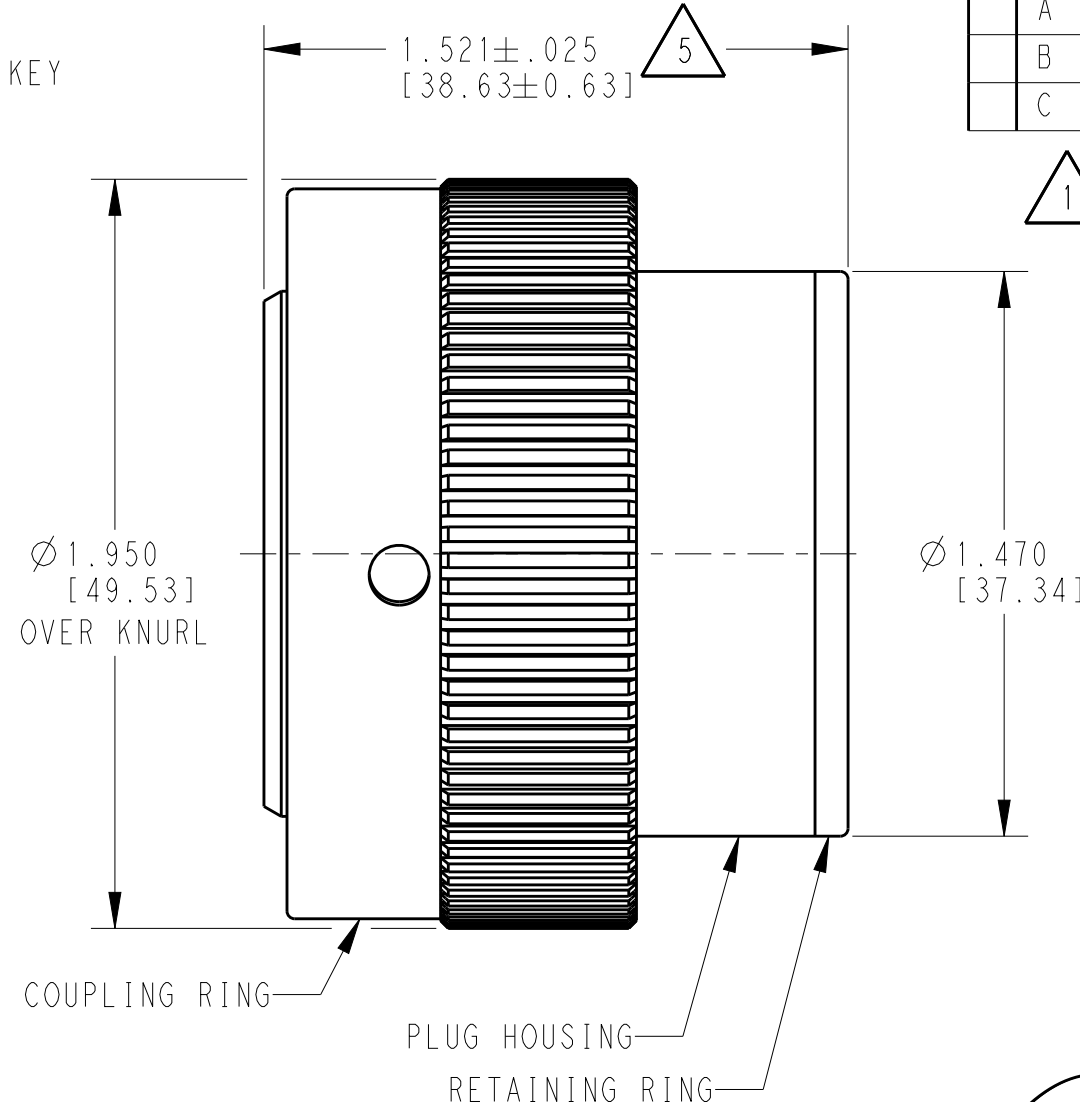

THIS DRAWING IS UNPUBLISHED
COPYRIGHT 2000 BY TE CONNECTIVITY
ALL RIGHTS RESERVED.

RELEASED FOR PUBLICATION
2015

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
			NC	NEW RELEASE PER E.O. P16572	07MAR2000	RDR
			A	REVISED PER E.O. P16875	29SEP2000	RDR
			B	REVISED PER E.O. P18119	15APR2003	RDR
			C	REVISED PER ECO-14-019072	23FEB2015	DM

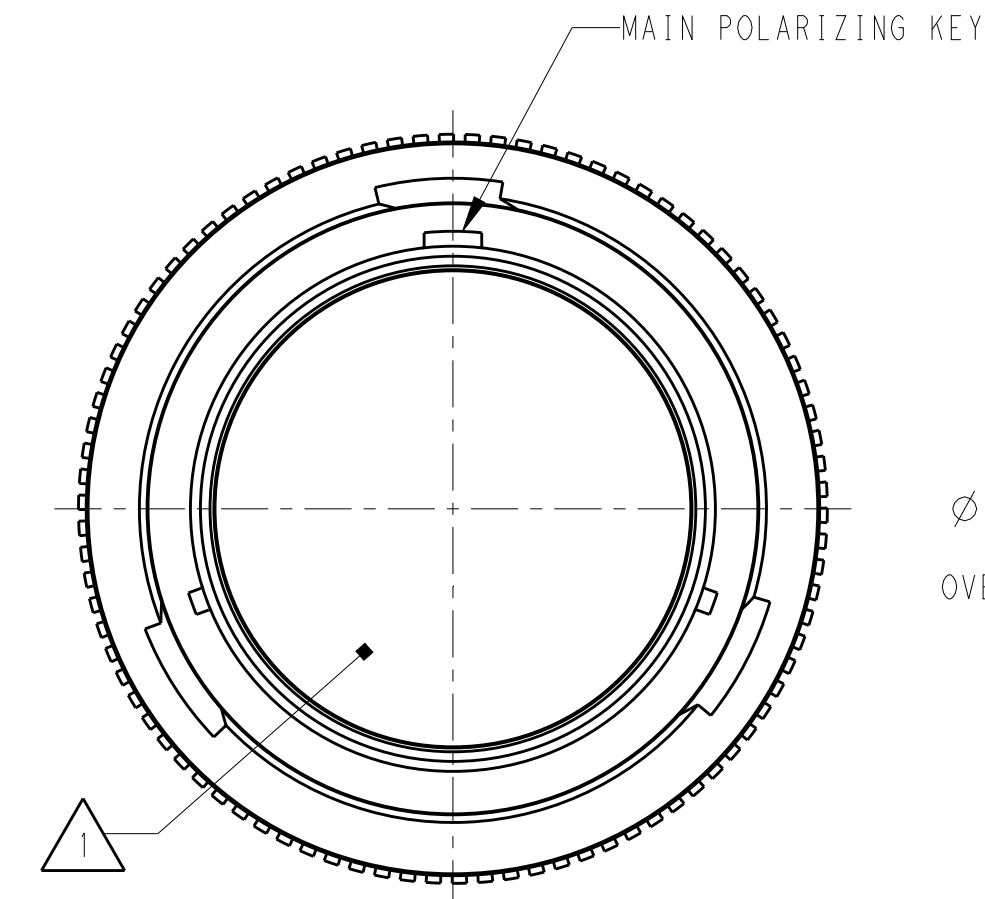

- 5 NOTED DIMENSION DOES NOT INCLUDE GROMMET PROTRUSION.
- 4 MATERIAL: PLUG HOUSING/COUPLING RING: PA66 GF10 (BLACK)
RETAINER RING: PA66 GF10 (GREEN, GRAY, BLUE)
GROMMET: SILICONE (ORANGE-RED)
- 3 SEE 0425-021-0000 APPLICATION SPECIFICATION
A. RECOMMENDED WIRE INSULATION RANGE
B. CONTACT REMOVAL TOOLS

2. THIS PLUG MATES WITH HDP24-24XXP/SX-XXXX RECEPTACLE
X = SEAL TYPE (N,T,E)
XX = INSERT ARRANGEMENT
XXXX = MODIFICATION

1 SEE CUSTOMER DRAWING 0425-014-2400 FOR AVAILABLE INSERT ARRANGEMENTS AND PART NUMBERS.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN STEVE BEARD 06MAR2000	TE Connectivity		
DIMENSIONS: INCHES[mm]		CHK JAIME C. APOSTOL 11APR2003			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD STEVE BEARD 11APR2003	NAME PLUG, COUPLING RING SIZE 24 HDP SERIES		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.015 [0.38] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC 0425-021-0000	SIZE A3		
MATERIAL 4		APPLICATION SPEC 3	CAGE CODE 4AFU8		
FINISH N/A		WEIGHT	DRAWING NO C-HDP26-24-XXP/SX		
		Customer Drawing	RESTRICTED TO -		
			SCALE 2:1		
			SHEET 1 OF 1		
			REV C		