
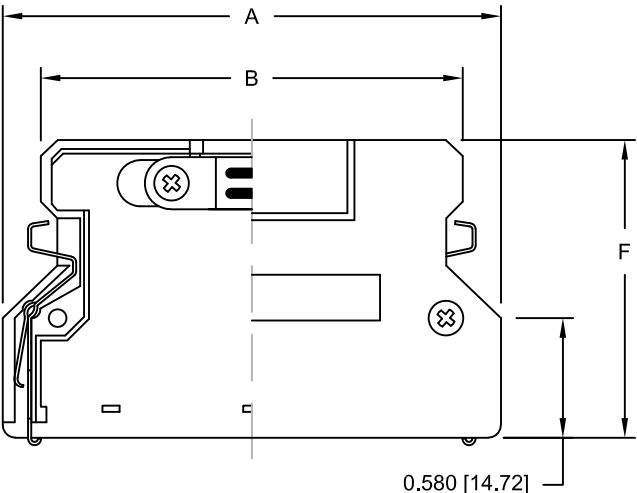


DESCRIPTION: 988 SERIES BACK SHELL KIT

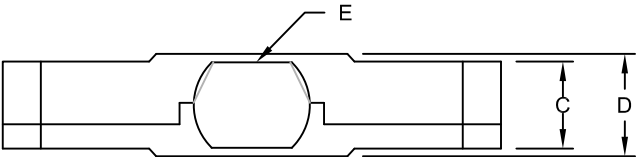

| No. OF PINS                   | DIMENSIONS    |               |               |               |                               |               |
|-------------------------------|---------------|---------------|---------------|---------------|-------------------------------|---------------|
|                               | A             | B             | C             | D             | E                             | F             |
| 50                            | 1.988 [50.50] | 1.594 [40.50] | 0.422 [10.71] | 0.498 [12.65] | 0.354 [9.00] - 0.433 [11.00]  | 1.445 [36.70] |
| 68                            | 2.409 [61.20] | 2.020 [51.30] | 0.421 [10.70] | 0.480 [12.20] | 0.433 [11.00] - 0.551 [14.00] | 2.453 [36.90] |
| ALL TOLERANCES = 0.012 [0.30] |               |               |               |               |                               |               |

MATERIAL:


BACK SHELL: ZINC PLATED NICKEL OVER COPPER  
JACKSCREWS: STEEL, NICKEL PLATED OVER COPPER  
SCREWS: STEEL, NICKEL PLATED OVER COPPER  
CLAMP: STEEL, NICKEL PLATED

KIT INCLUDES:

2-BACK SHELL HALVES  
1-STRAIN RELIEF CLAMP  
1-CONNECTOR (SOLDER LATCH)  
2-STRAIN RELIEF SCREWS  
(FLAT HEAD M2.6)  
2-BACK SHELL SCREWS  
(FLAT HEAD M2.6)  
2-SPRING CLIPS

BACK SHELL KIT  
PART NUMBER  
988-YYY-130L121

SERIES \_\_\_\_\_  
POSITIONS \_\_\_\_\_  
050 \_\_\_\_\_  
068 \_\_\_\_\_  
CONTACTS \_\_\_\_\_  
SOLDER \_\_\_\_\_  
MATERIAL \_\_\_\_\_  
30 = DIE CAST (NICKEL)  
RoHS COMPLIANT \_\_\_\_\_  
L = LOW TEMP. PROCESS  
COLOR \_\_\_\_\_  
12 = METAL(IZED)  
PUT-UP \_\_\_\_\_  
1 = KIT

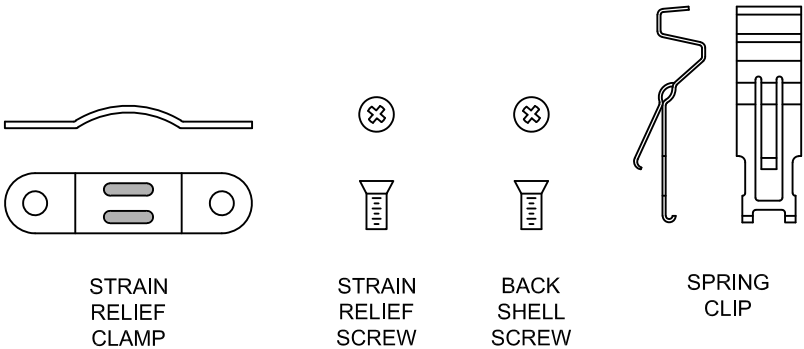

RoHS COMPLIANT

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
C. SMITH  
DATE:  
04/18/2008

NorComp

SCALE: NTS  
SHEET 1 OF 3  
REV 4  
DWG NO. 988-YYY-130L121

DESCRIPTION: CONNECTOR FOR 988 SERIES BACK SHELL KIT




| No. OF PINS | DIMENSIONS    |               |              |
|-------------|---------------|---------------|--------------|
|             | A             | B             | C            |
| 50          | 1.545 [39.30] | 1.372 [34.85] | 0.366 [9.30] |
| 68          | 1.996 [50.70] | 1.825 [46.35] | 0.366 [9.30] |

## MATERIAL:

HOUSING: THREMOPLASTIC, BLACK, P.B.T. UL94V-0  
CONTACTS: PHOSPHOR BRONZE, GOLD SELECTIVE PLATED  
FRONT SHELL: STEEL, NICKEL PLATED OVER COPPER

## ELECTRICAL:

CURRENT RATING: 1 AMPS  
INSULATOR RESISTANCE: 500 MOHMS Min.  
DIELECTRIC WITHSTANDING: 500VAC  
CONTACT RESISTANCE: 35 mOhms Max.  
OPERATING TEMPERATURE: -55° ~ +85° C

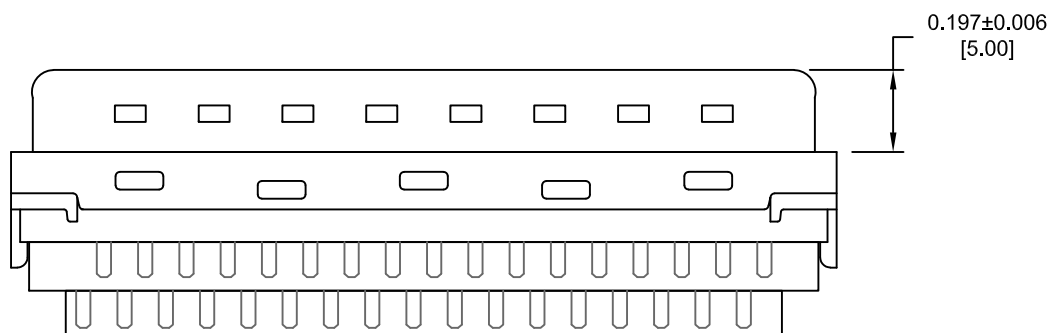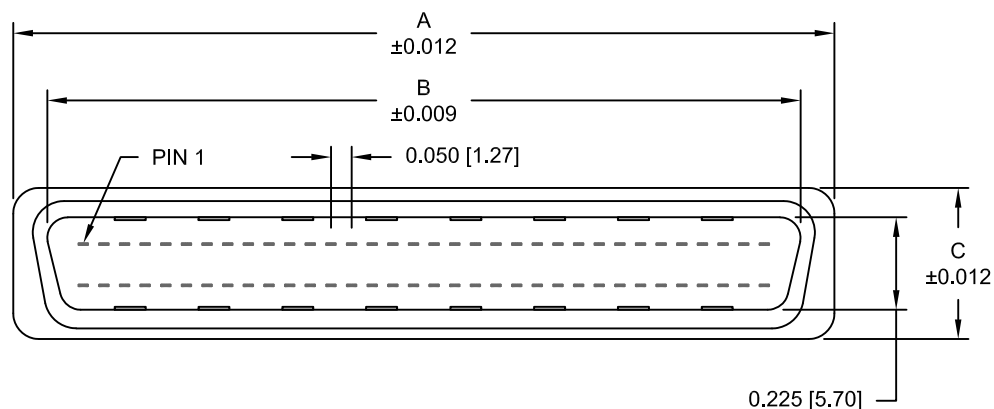

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
C. SMITH  
DATE:  
04/18/2008

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

NorComp




SCALE:  
NTS

SHEET OF  
2 3




REV  
4

DWG NO. 988-YYY-130L121

## 50 POSITION

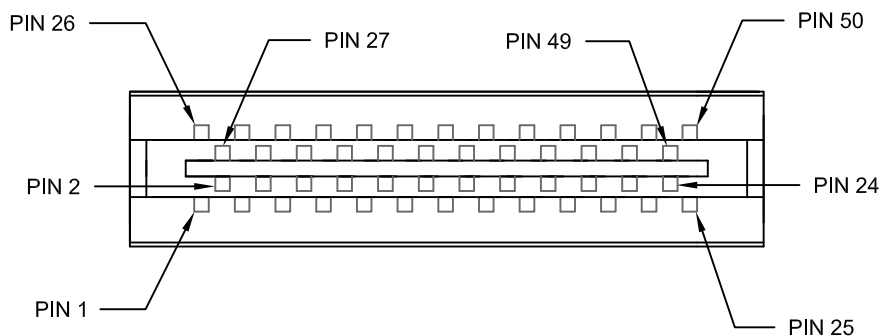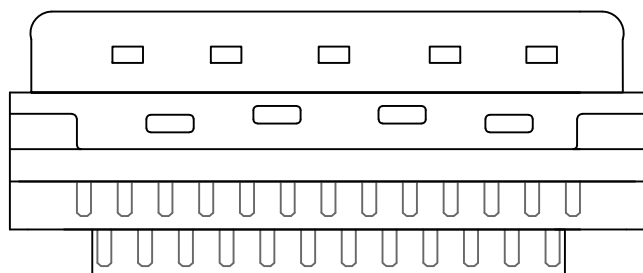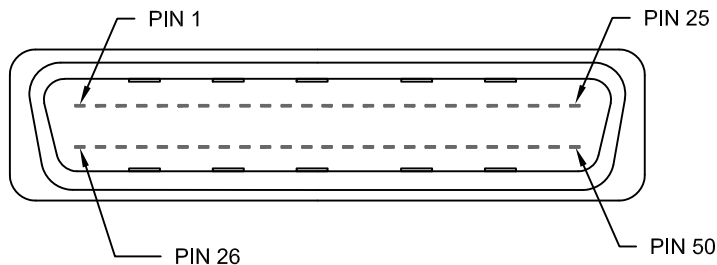

## 68 POSITION

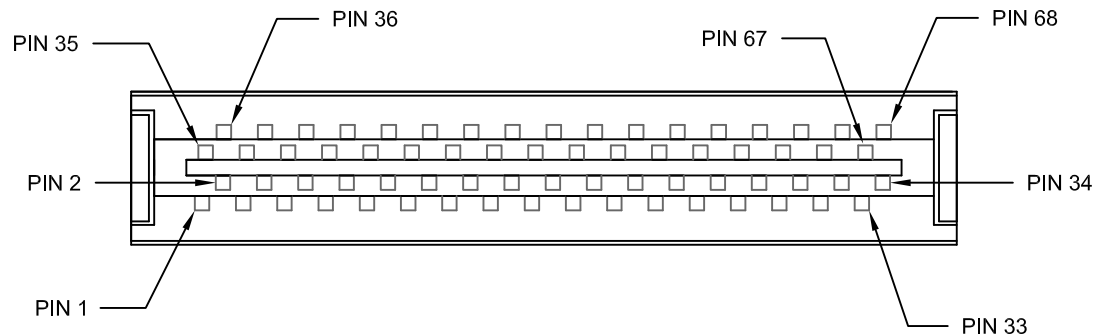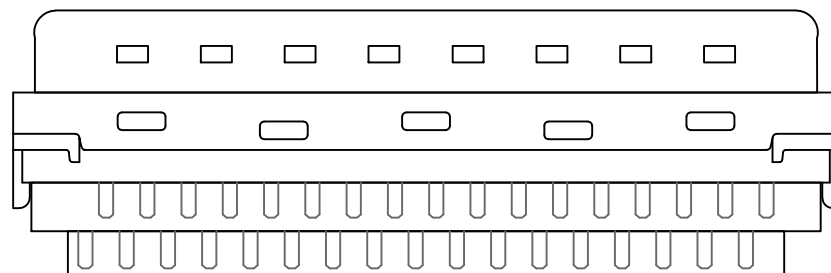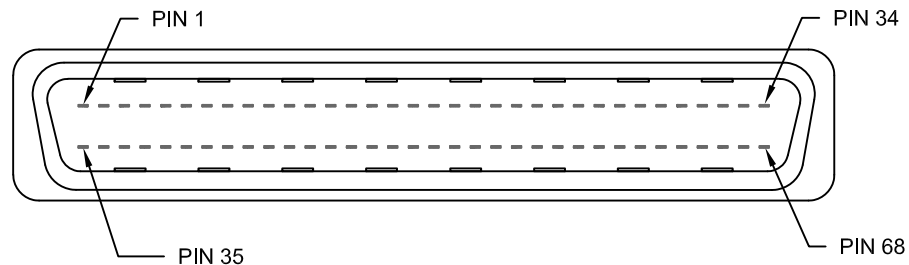

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:  
C. SMITH  
DATE:  
04/18/2008

UNITS = INCHES [MM] DO NOT SCALE FROM DRAWING

NorComp

SCALE:  
NTS

SHEET OF  
3 3

REV  
4

DWG NO. 988-YYY-130L121