

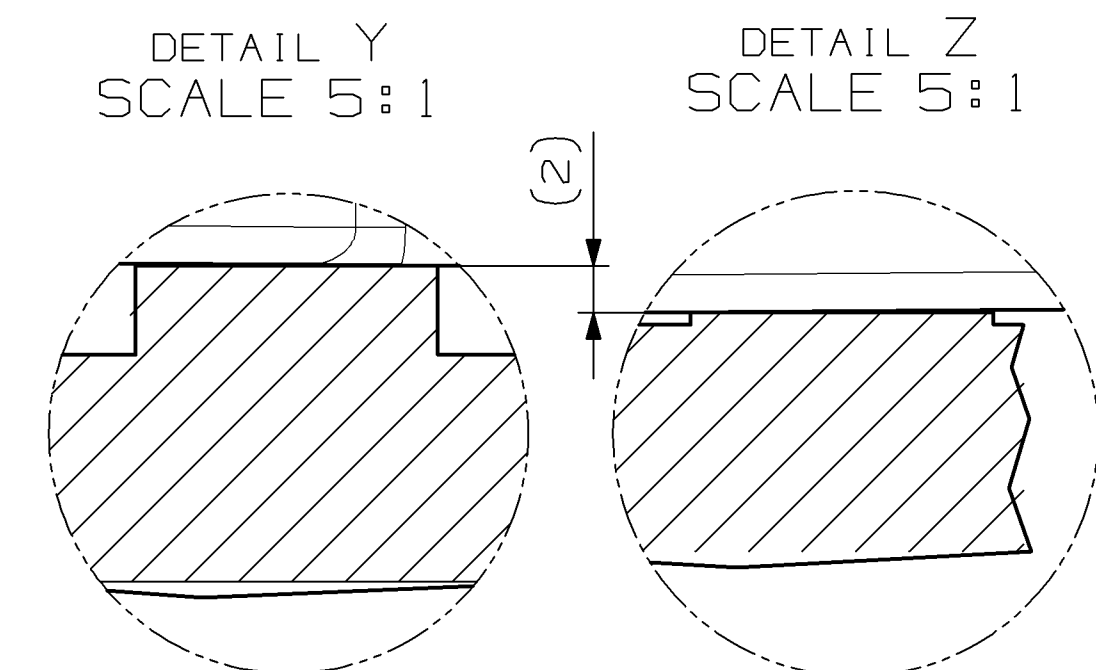
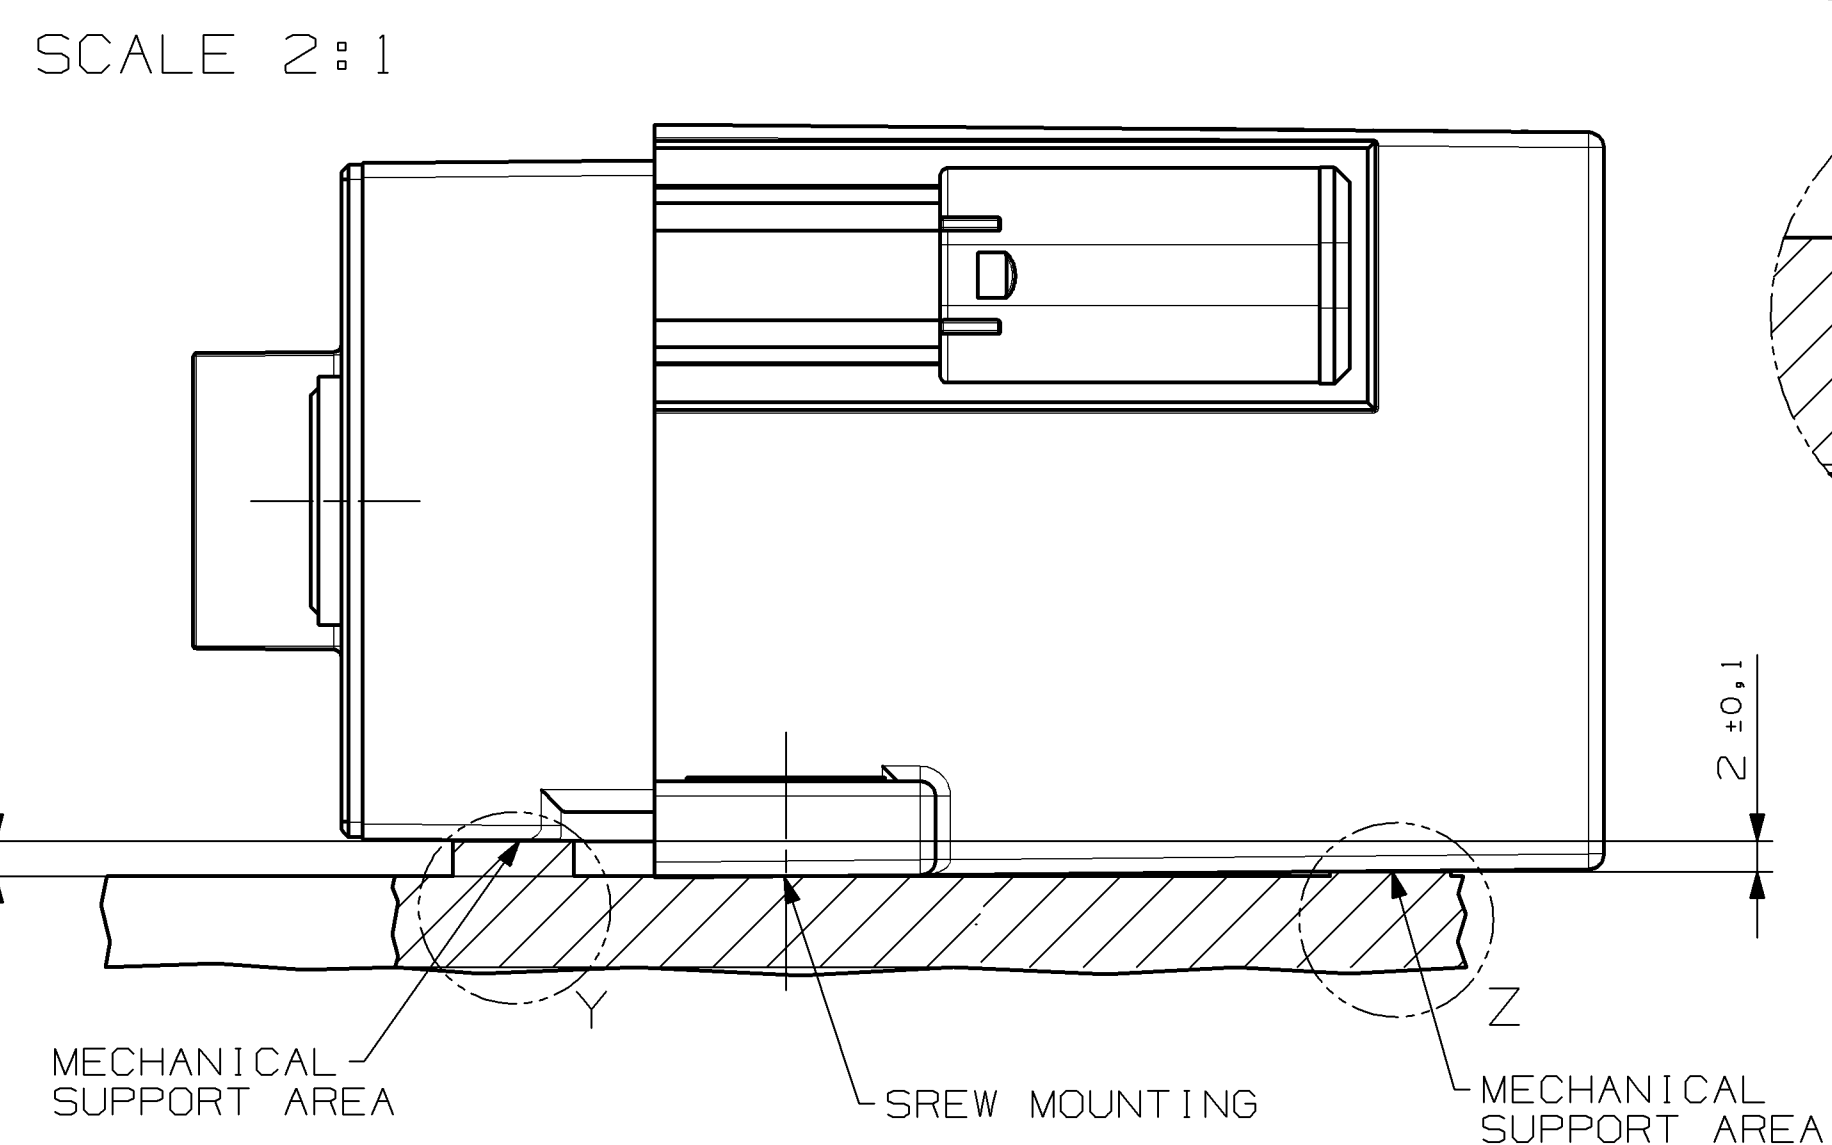
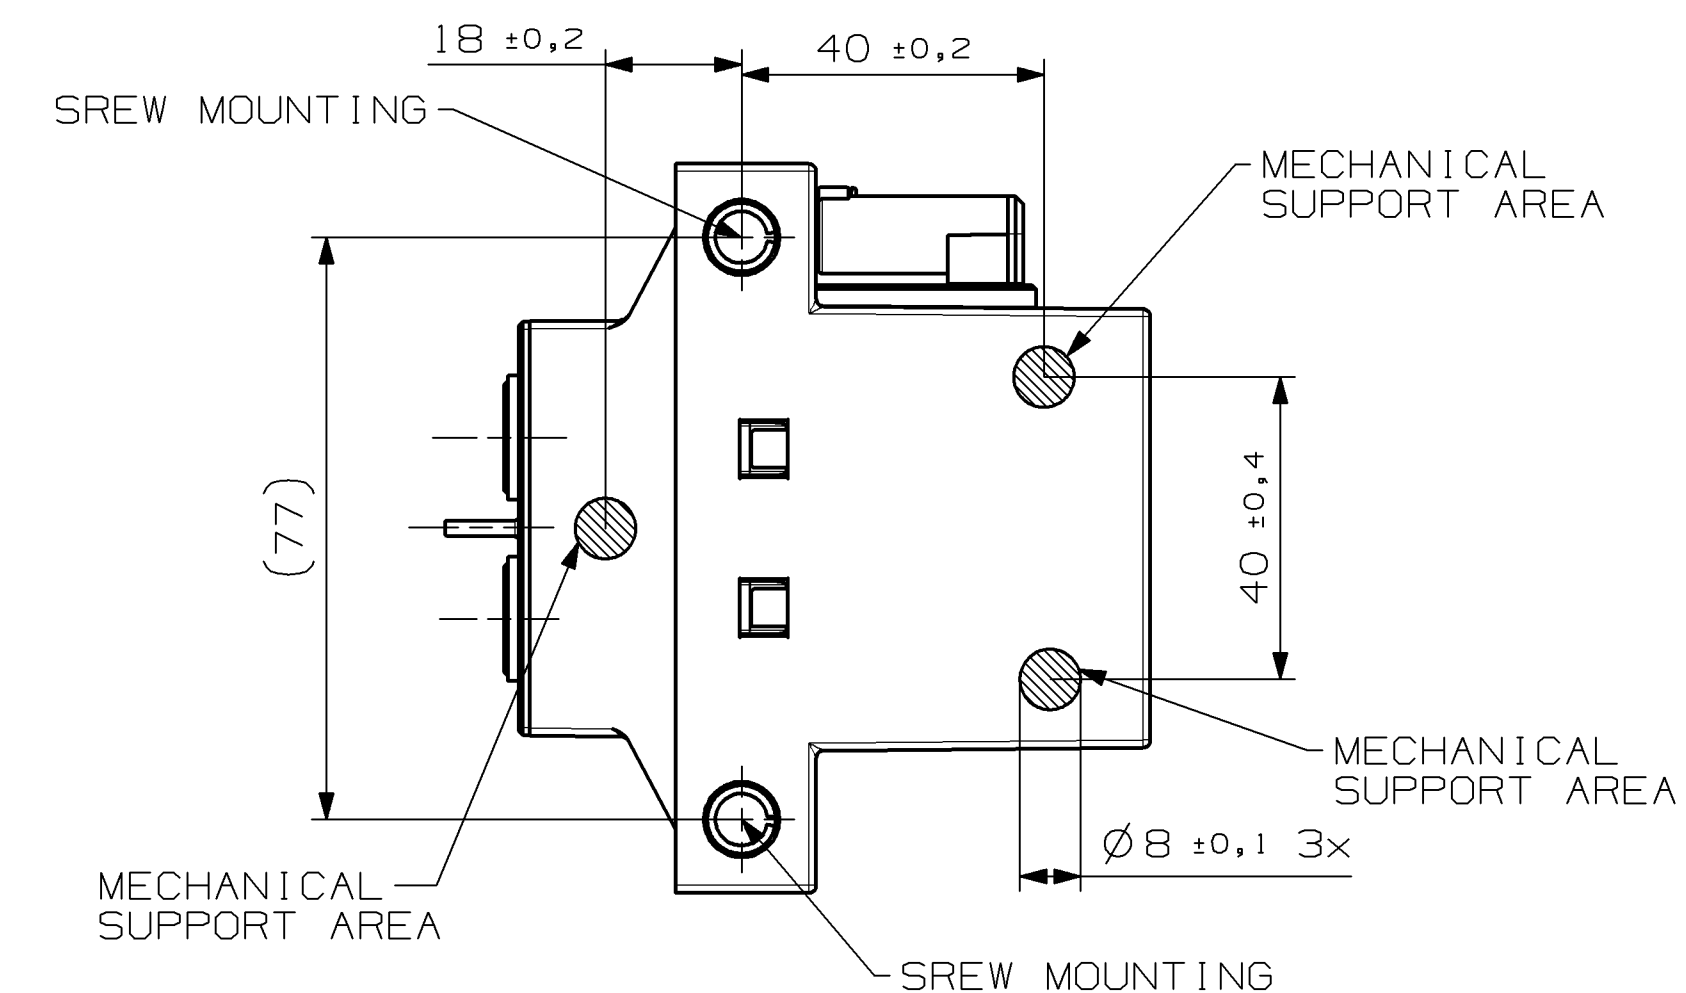


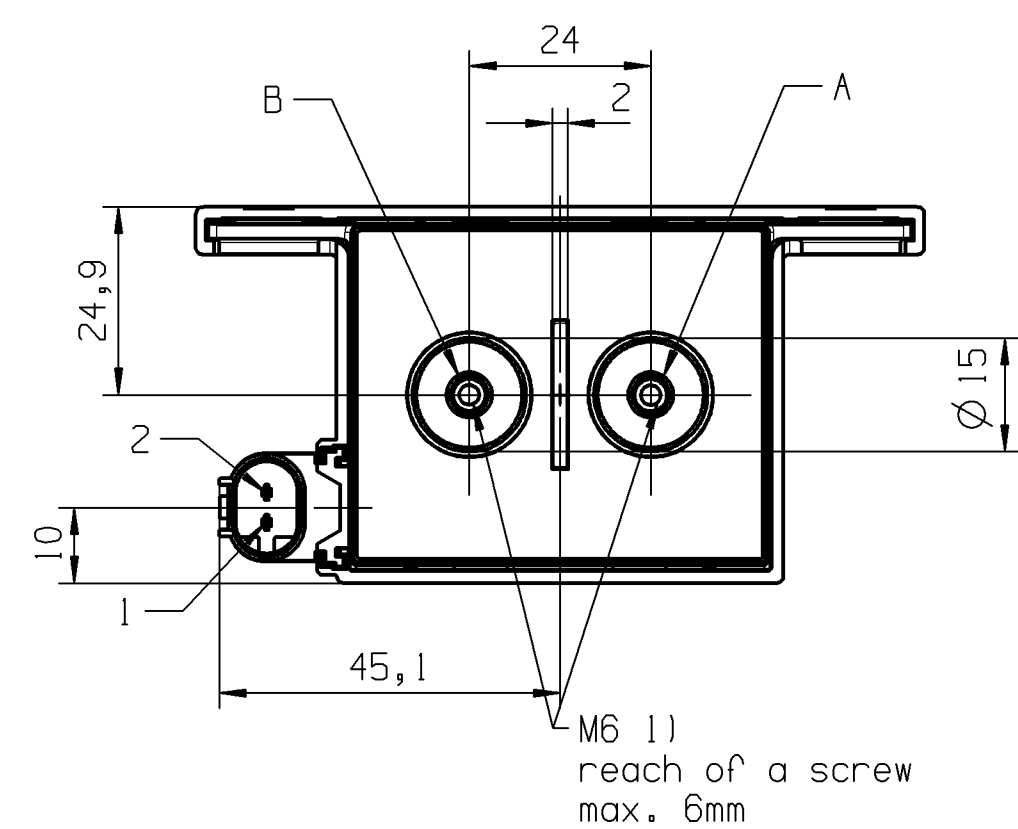

Notice :

- 1) PERMITTED TORQUE 6 Nm MAX. WHEN MIN. 4 TURNS
- 2) Socket Housing
TE Interface 2 Pos. MOS Code A,
appropriate for Socket Housing 2 Pos. MOS,
TE PART NO. 1-967644-1
PRESCRIBED WIRE CROSS SECTION = 0,35mm² MIN
- 3) HEXAGON SOCKET BOTTOM HEAD SCREW EN ISO 7380 M6 WITH
WASHER ISO 7090/ 7089

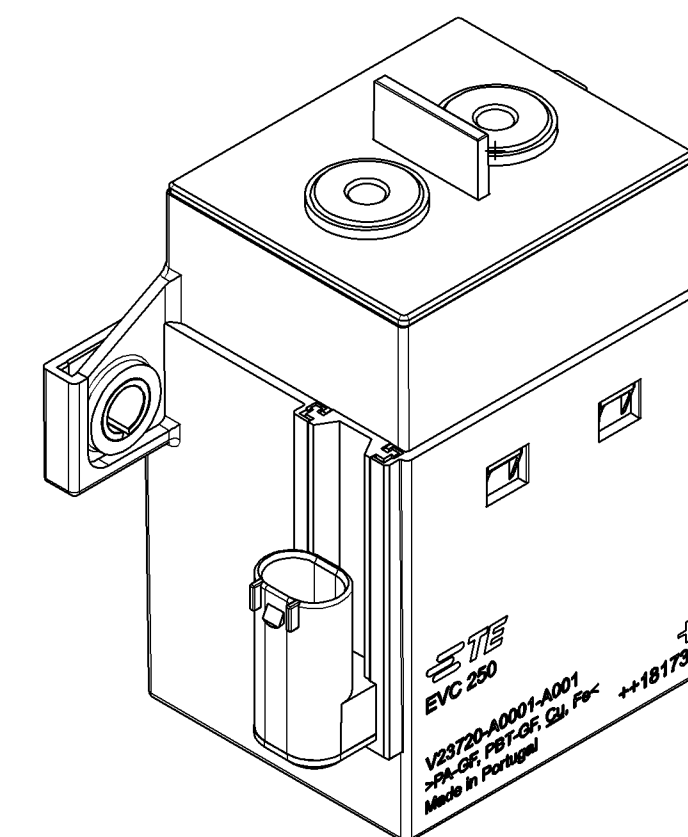

ALIAS		TE P/N			
V23720-A0001-A001		2-1904070-2			
PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES, ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.				CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD	
APPLICABLE SPEC.:				FINISH	
TOLERANCE UNLESS SPECIFIED OTHERWISE ISO 8015 ISO 2768-cl				DIMENSIONS APPLY PLATING	
SCALE				WEIGHT	
MATERIAL				1:1 602g	
DIMENSIONS IN MM				---	
DATE				PART NAME	
NAME				EVC 250, HV-RELAY	
DWG. NO.				WITH CONNECTOR	
REV. 1				V23720-A0001-A001-CD	
REV. 1				SHT. 1	
REV. 1				OF 1	