

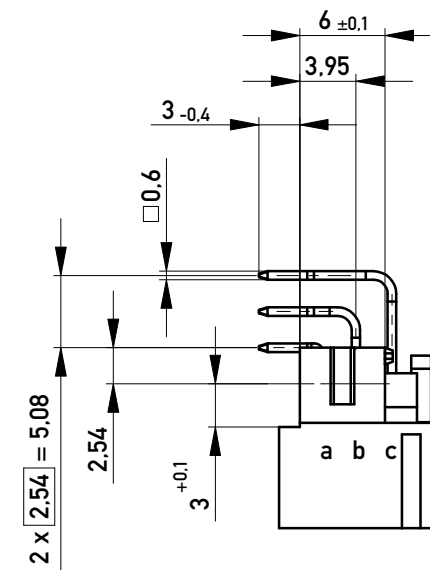


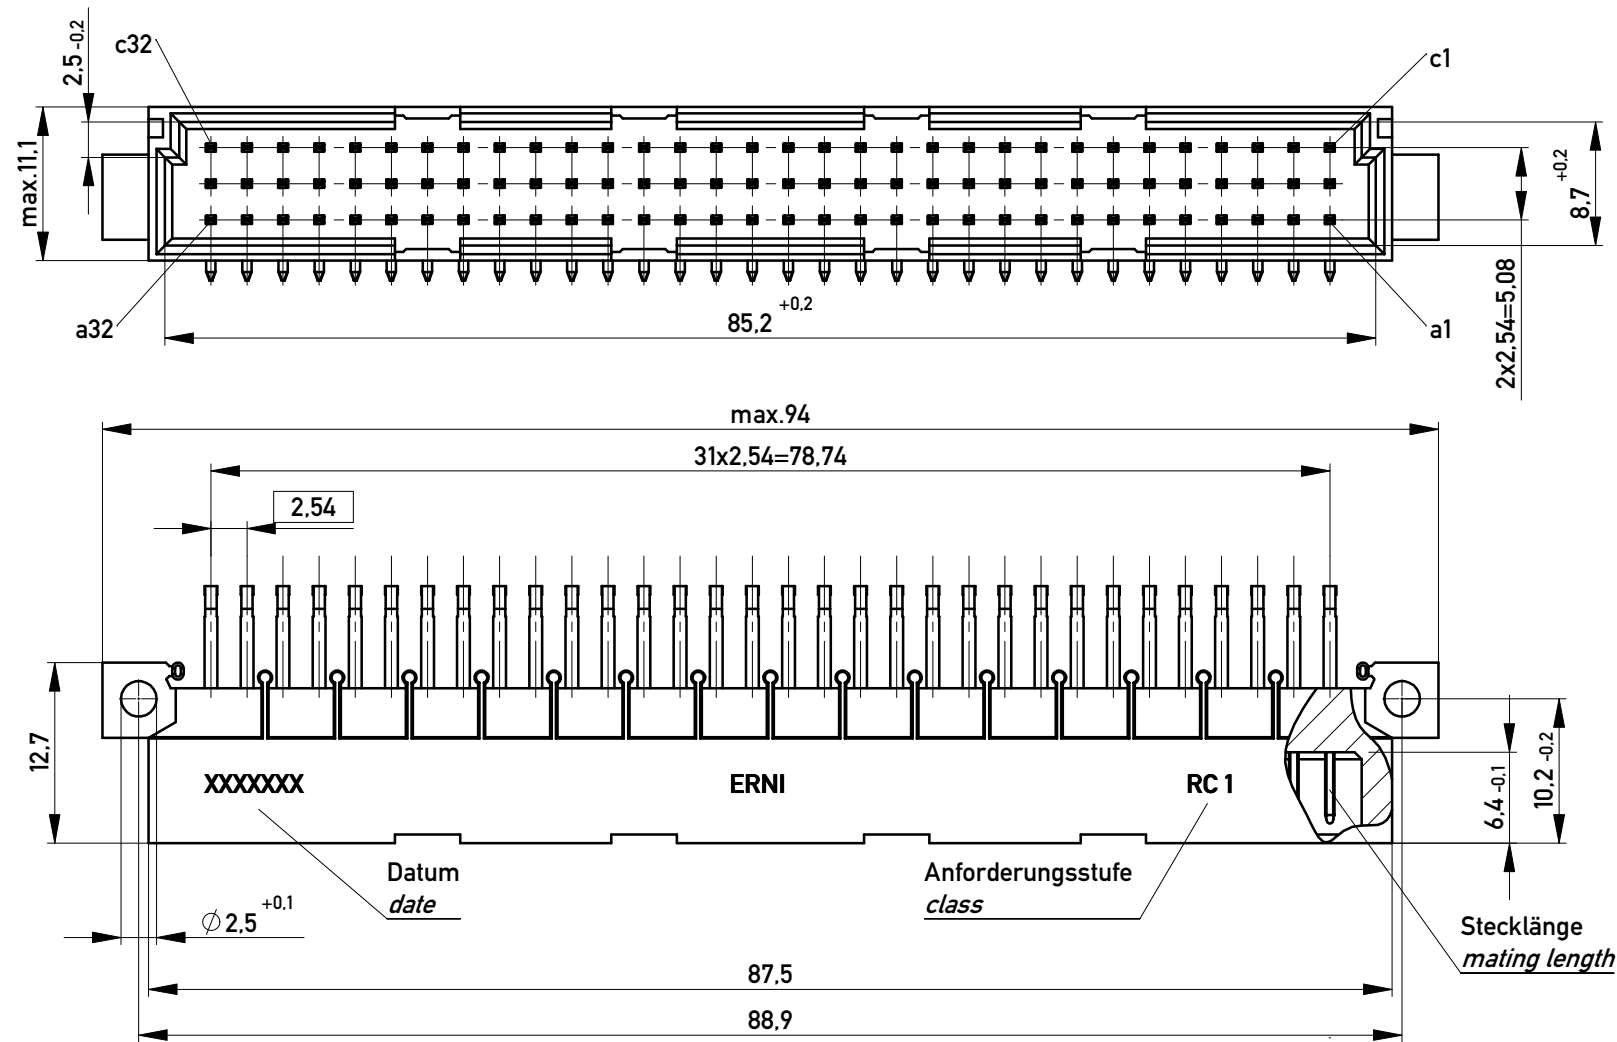

Stecklänge / mating length




E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

Bestückungsplan / contact layout

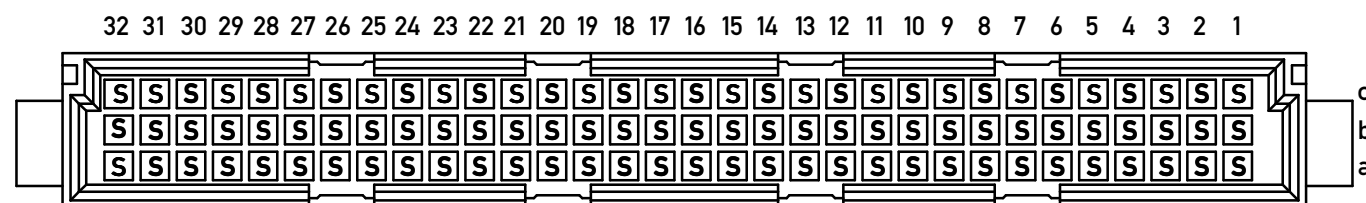

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / type 4


Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2


Lötanschluss 0,6x0,6mm / solder terminal 0,6x0,6mm

Leiterplatten-Lochbild / PCB drillhole pattern

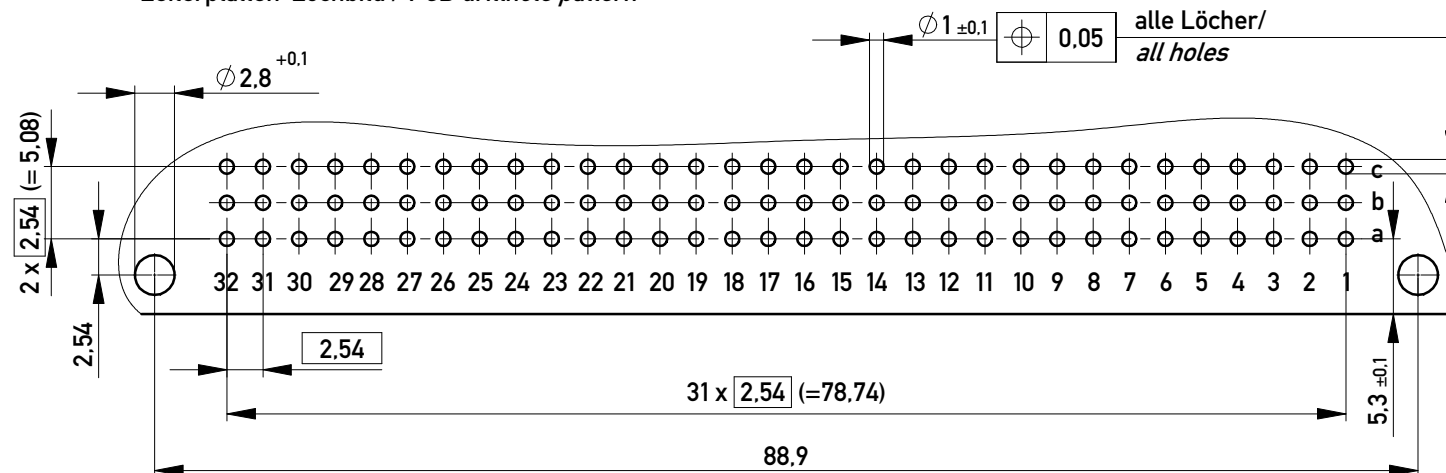

Bedruckung siehe Zeichnung 294905

marking see drawing 294905

Information:			Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation	
b			22.06.2017		Messerleiste C 96 Löt	
Index			Date		Male Connector C96 solder	
			 www.ERNI.com		374543	
			Class		STVC	
					I	
					A3	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[374543](#)