



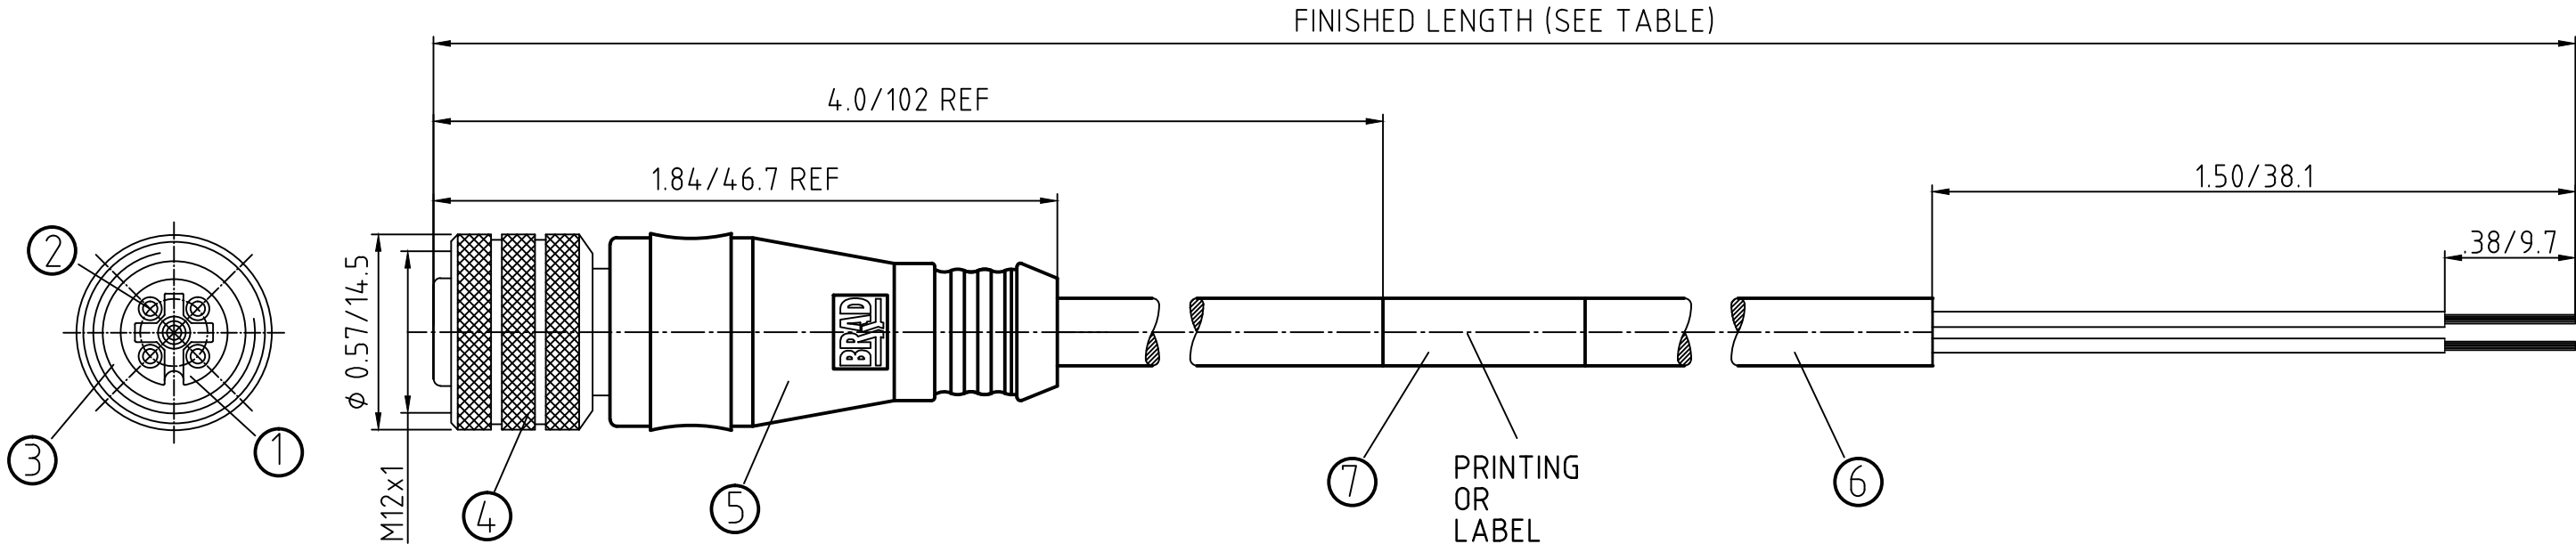

CONNECTOR SPECIFICATION:

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	max. 4 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
UL CERTIFICATIONS	UL RECOGNIZED, FILE NO. E152210
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	POLYURETHANE (PUR)	BLACK
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON	RED
4	COUPLING NUT	BRASS	NICKEL PLATED
5	OVERMOLD	TPE	YELLOW
6	CABLE - 22 AWG, (COPPER STRANDING) 3/4/5 CONDUCT. 300V	INSUL: PVC JACKET: TPE	YELLOW
7	LABEL	MYLAR	BLACK/YELLOW

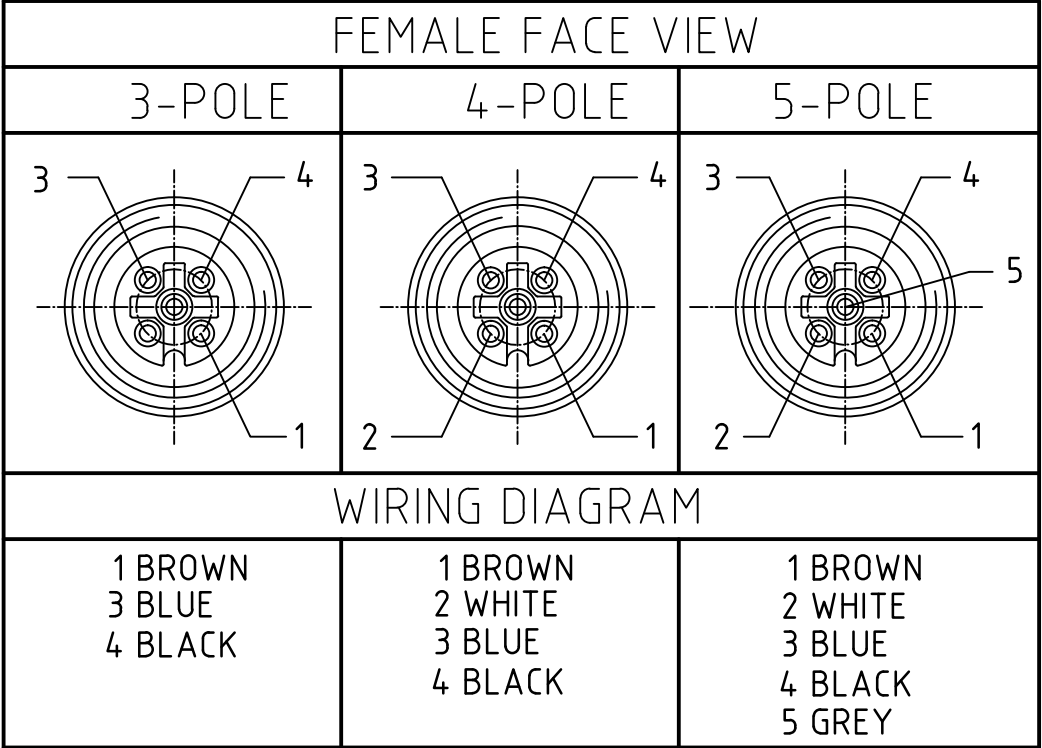

ADD "REF" TO HEAD DIMENSIONS EC NO: WNA2011-0563 DRWN: TWOLDEGE CH'KD: VOU APPR: JFMURPHY 2010/01/25	QUALITY SYMBOLS ▽ = 0 ▽C = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm		INCH		DIMENSION STYLE IN/MM		SCALE 2:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
			4 PLACES ±---		±---		DRAWN BY		DATE		MICRO-CHANGE CORDSET 3/4/5-POL FEMALE STR SE 22/3-5 TPE YELLOW CABLE			
			3 PLACES ±---		±---		CHECKED BY		DATE					
			2 PLACES ±---		±.01		RE		2010/01/21		MOLEX INCORPORATED			
			1 PLACE ±0.3		±---		APPROVED BY		DATE					
			ANGULAR ± --- °				NSTAUDIG		2010/01/25		DOCUMENT NO.		SHEET NO.	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE SHEET 2		MATERIAL NO.		SD-120065-034		1 OF 2			
					SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
3	1200651108	803000K05M020	6.56' +3.50" -0 [2.0M +88.9 -0]

POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
4	1200651120	804000K05M010	3.28' +2.19" -0 [1.0M +55.6 -0]
4	1200651121	804000K05M020	6.56' +3.50" -0 [2.0M +88.9 -0]
4	1200651122	804000K05M030	9.84' +3.50" -0 [3.0M +88.9 -0]
4	1200651123	804000K05M040	13.12' +6.50" -0 [4.0M +165.1 -0]
4	1200651124	804000K05M050	16.40' +6.50" -0 [5.0M +165.1 -0]
4	1200651125	804000K05M060	19.69' +6.50" -0 [6.0M +165.1 -0]
4	1200651126	804000K05M100	32.81' +12.50" -0 [10.0M +317.5 -0]
4	1200651127	804000K05M200	65.62' +24.50" -0 [20.0M +622.3 -0]

ADD "REF" TO HEAD DIMENSIONS
EC NO.: WNA2011-0563
DRWN: TWOLDEGE
CH'KD: VOU
APPR: JFMURPHY

4/29/11
2010/01/25

QUALITY SYMBOLS

▽

= 0

▽

= 0

DESCRIPTION

REV

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES

±---

±---

3 PLACES

±---

±---

2 PLACES

±---

±.01

1 PLACE

±0.3

±---

ANGULAR

± --- °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE

IN/MM

DRAWN BY

DATE

CHECKED BY

DATE

APPROVED BY

DATE

NSTAUDIG

2010/01/25

MATERIAL NO.

SEE TABLE

SIZE

A3

SCALE

2:1

DESIGN UNITS

METRIC

THIRD ANGLE PROJECTION

MICRO-CHANGE CORDSET
3/4/5-POL FEMALE STR SE
22/3-5 TPE YELLOW CABLE

molex

MOLEX INCORPORATED

MATERIAL NO.

SD-120065-034

SHEET NO.

2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION