


# Captive Screw Type 4 8-32 Thread

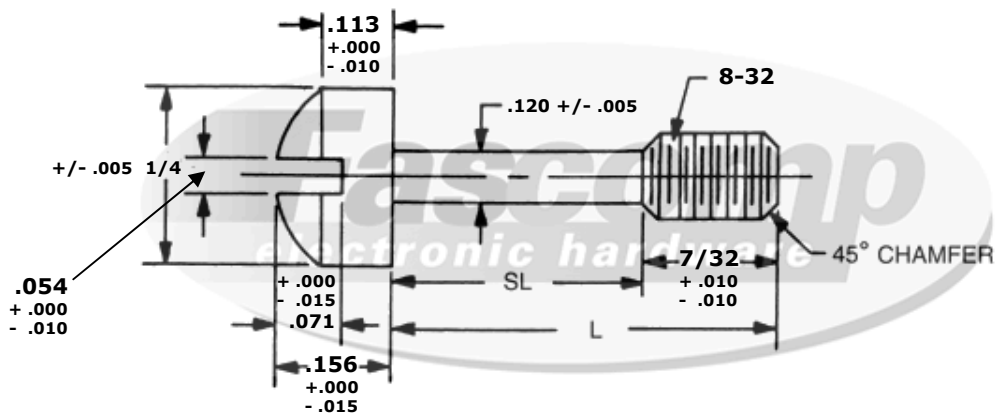

Create a part number:

| Length | Material | Finish |
|--------|----------|--------|
| FCXXXX | XX       | XX     |
|        |          |        |

| Captive Screws - 8-32 Thread |        |            |               |
|------------------------------|--------|------------|---------------|
| ✓                            | FCXXXX | Length (L) | S.L. +/- .010 |
|                              | FC0842 | 5/16       | 3/32          |
|                              | FC0843 | 3/8        | 5/32          |
|                              | FC0844 | 7/16       | 7/32          |
|                              | FC0845 | 1/2        | 9/32          |
|                              | FC0846 | 9/16       | 11/32         |
|                              | FC0847 | 5/8        | 13/32         |
|                              | FC0848 | 11/16      | 15/32         |
|                              | FC0849 | 3/4        | 17/32         |
|                              | FC0850 | 13/16      | 19/32         |
|                              | FC0851 | 7/8        | 21/32         |
|                              | FC0852 | 15/16      | 23/32         |
|                              | FC0853 | 1          | 25/32         |
|                              | FC0854 | 1-1/16     | 27/32         |
|                              | FC0855 | 1-1/8      | 29/32         |
|                              | FC0856 | 1-3/16     | 31/32         |
|                              | FC0857 | 1-1/4      | 1-1/32        |

| Material |                    |                 |
|----------|--------------------|-----------------|
| ✓        | Material Code (XX) |                 |
|          | B                  | Brass           |
|          | S                  | Steel           |
|          | SS                 | Stainless Steel |

| ✓ | Compatible Finish (XX) |                                       |
|---|------------------------|---------------------------------------|
|   | B, S, SS               | 0 - Plain                             |
|   | B, S                   | 5 - Nickel Plate (QQ-N-290)           |
|   | B, S                   | 12 - Zinc Clear (ASTM-B-633)          |
|   | B, S                   | 16 - Electro Tin (MIL-T-10727 TYPE 1) |
|   | SS                     | 20 - Passivation (MIL-F-14072D)       |
|   | B, S, SS               | 26 - Black Oxide                      |
|   | B, S                   | 28 - Zinc Yellow (ASTM-B-633)         |

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware



Fascomp Electronic Hardware  
 7814 Kingspointe Pkwy  
 Orlando, FL 32819  
 www.fascomp.com  
 Tel: (407) 226-2112  
 Fax: (407) 226-3370

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.