



RoHS compliant

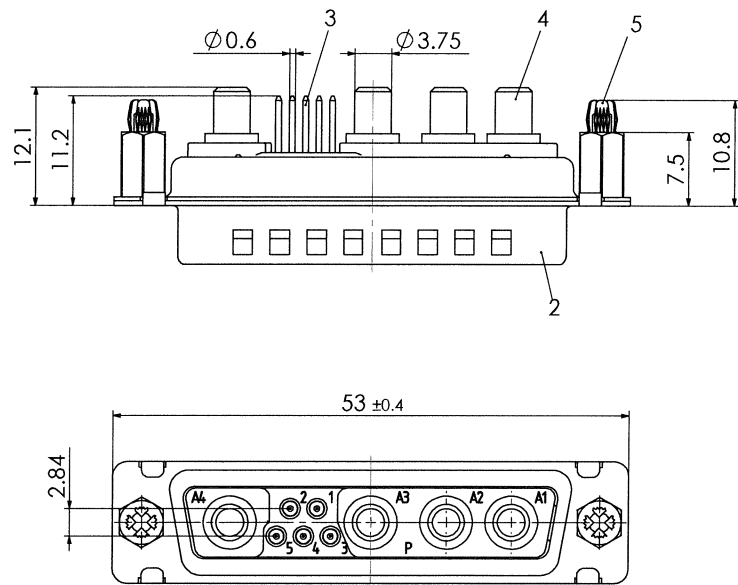


PCB hole pattern, mounting side

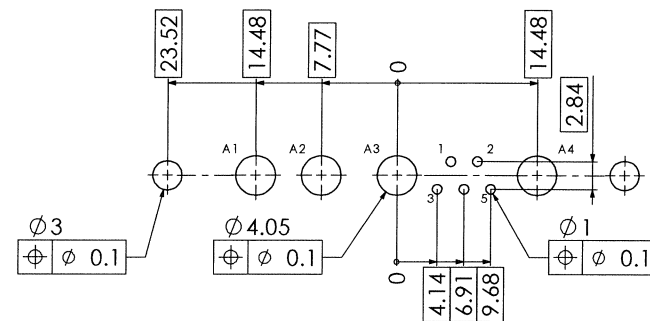

5	2	Snap-in bolt	PCB 1.6mm / Brass	tin plated
4	4	High power contact	FMP016P105	40A
3	5	Signal contact	P1 / Brass	AuroPur
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C - +130°C)	green
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY,
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.



D-Sub Mixed-Layout Connector

DWG.NO.

FM9W4P1A-1328

REV.

1

PAGES 1

REV

DATE _____

CH.-NO.

ORIGINAL: DIN A3-DRAWING AS A FILE

REPLACEMENT FOR:

PAGES 1