

INTERCONNECTS

SERIES 714...00X • .100" GRID LOW PROFILE CARRIERS • SINGLE AND DOUBLE ROW STRIPS

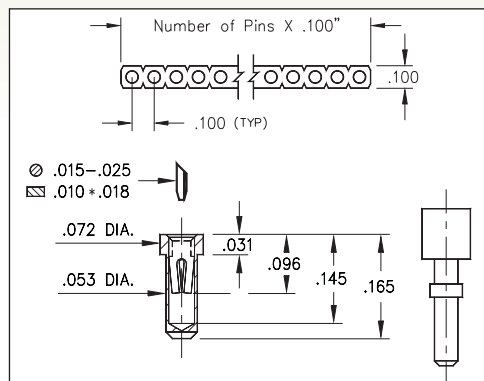


FIG. 1

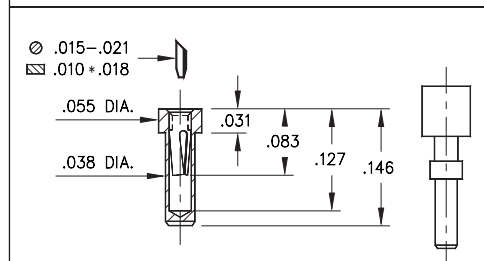


FIG. 2

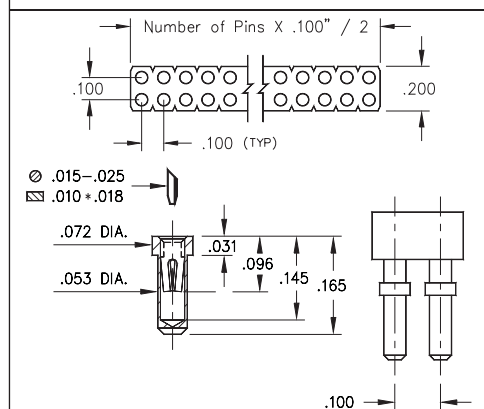


FIG. 3


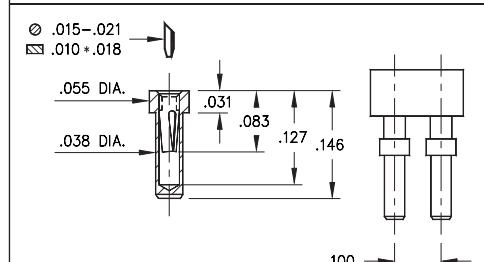


FIG. 4

- Low profile receptacles sit .031" above the board
- Series 714 use MM #1401 and MM #1407 pin receptacles. See pages 157 and 170 for details
- Hi-Rel, 4-finger BeCu #30 contact is used in the #1401 receptacle and a BeCu #11 contact is used in the #1407. Both contacts are rated at 3 amps. See pages 251 and 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

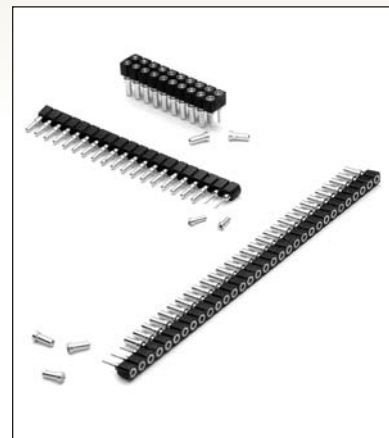

ORDERING INFORMATION

FIG. 1	Single Row (.055" min. mounting hole)					
	714-XX-1 -41-001000					
	Specify number of pins				01-64	
FIG. 2	Single Row (.039" min. mounting hole)					
	714-XX-1 -31-007000					
	Specify number of pins				01-64	
FIG. 3	Double Row (.055" min. mounting hole)					
	714-XX-2 -41-001000					
	Specify number of pins				04-64	
FIG. 4	Double Row (.039" min. mounting hole)					
	714-XX-2 -31-007000					
	Specify number of pins				04-64	
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264						
SPECIFY PLATING CODE XX=		91	93	41	43	
Sleeve (Pin)		200 μ"Sn/Pb	200 μ"Sn/Pb	200 μ"Sn	200 μ"Sn	
Contact (Clip)		10 μ"Au	30 μ"Au	10 μ"Au	30 μ"Au	