SERIES 714...00X • .100" GRID LOW PROFILE CARRIERS • SINGLE AND DOUBLE ROW STRIPS

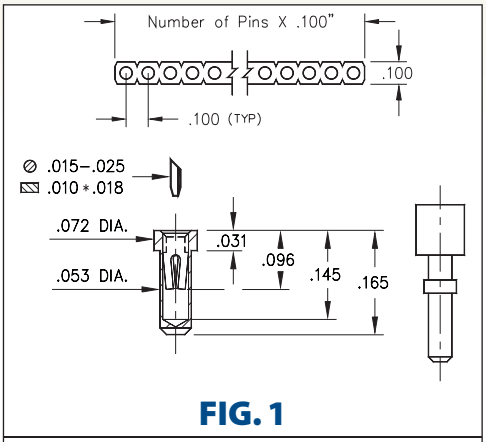

FIG. 1

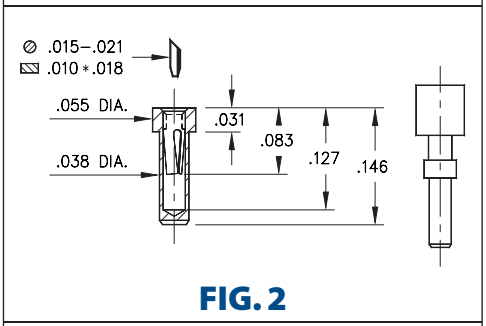

FIG. 2

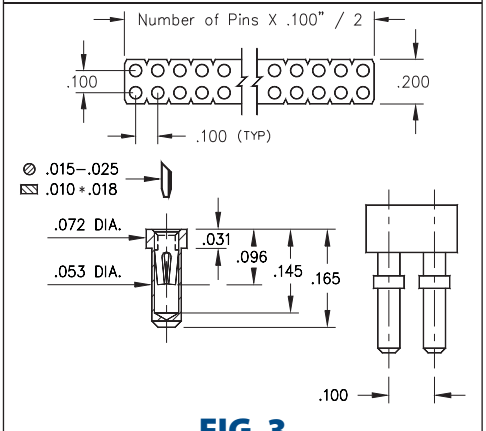

FIG. 3

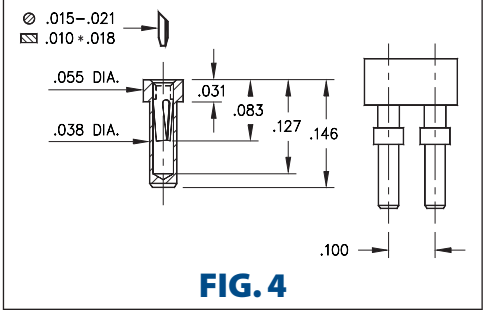

FIG. 4

- Low profile receptacles sit .031" above the board
- Series 714 use MM #1401 and MM #1407 pin receptacles. See pages 157 and 170 for details
- Hi-Rel, 4-finger BeCu #30 contact is used in the #1401 receptacle and a BeCu #11 contact is used in the #1407. Both contacts are rated at 3 amps. See pages 251 and 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

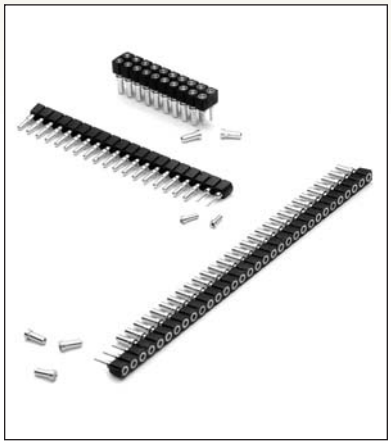

ORDERING INFORMATION

FIG. 1	**Single Row (.055" min. mounting hole)** 714-XX-1__-41-001000 **Specify number of pins** 01-64
FIG. 2	**Single Row (.039" min. mounting hole)** 714-XX-1__-31-007000 **Specify number of pins** 01-64
FIG. 3	**Double Row (.055" min. mounting hole)** 714-XX-2__-41-001000 **Specify number of pins** 04-64
FIG. 4	**Double Row (.039" min. mounting hole)** 714-XX-2__-31-007000 **Specify number of pins** 04-64

RoHS-2 2011/65/EU

XX=Plating Code See Below

For Electrical, Mechanical & Enviromental Data, See page 264

SPECIFY PLATING CODE XX=		91	93		41 ◆	43 ◆	
Sleeve (Pin)		200 µ" Sn/Pb	200 µ" Sn/Pb		200 µ" Sn	200 µ" Sn	
Contact (Clip)		10 µ" Au	30 µ" Au		10 µ" Au	30 µ" Au	

MILL-MAX® Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com