

Housing - HC-B16-TFQ-H-O2STM25G - 1412498

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



HEAVYCON sleeve housing B16, for double locking latch, height 76 mm, with thread 2x M25, straight conductor exit

The photo shows the housing with a thread

RoHS

Key Commercial Data

Packing unit	10 pc
Minimum order quantity	20 pc
GTIN	 4 046356 964722
GTIN	4046356964722

Technical data

General

Note	For contact inserts HC-B16, BB32, D40, DD72, HS6, M, K
Size	B16

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Degree of protection	IP65

Material data

Housing material	Aluminum die-cast
------------------	-------------------


Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Housing - HC-B16-TFQ-H-O2STM25G - 1412498

Dimensional drawing

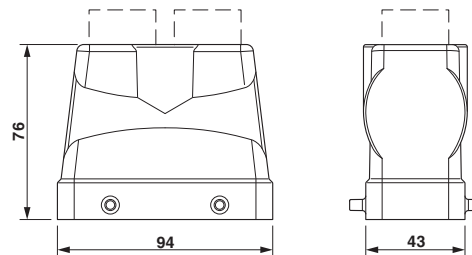

Dimensional drawing

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC



RU C-
DE.AI30.B.01102

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>