
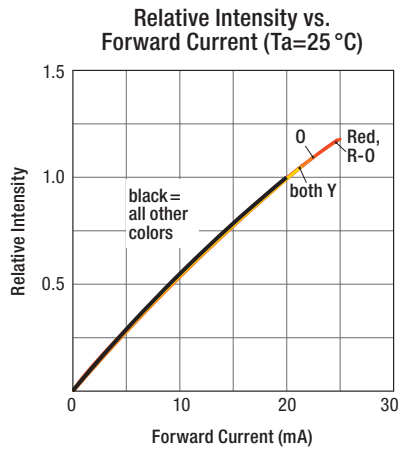





Electrical/Optical Characteristics

| Dialight P/N | | Emitted Color | Material | Lens Color | Luminous Intensity | | | Dominant Wavelength | | | Forward Voltage | | | Viewing Angle (°deg.) | Thermal Resistance (°C/W) Rth(j-s) If=20ma | Reverse Current Intensity (µA) (Ir) VR=5V |
|---------------|-------------------|---------------|----------|--------------|--------------------|-----|-----|---------------------|-----|-----|-----------------|-----|-----|-----------------------|--|--|
| 20-Piece Tape | 7" Reel, 4000 pcs | | | | If = 20 ma | | | | | | | | | | | |
| | | | | | Min | Typ | Max | Min | Typ | Max | Min | Typ | Max | | | |
| 598-8210-102F | 598-8210-107F | Red | AllInGaP | Non-Diffused | 20 | 55 | 90 | 625 | 633 | 640 | 1.8 | 2.1 | 2.4 | 140 | 450 | 10 |
| 598-8220-102F | 598-8220-107F | Red-Orange | | | 70 | 120 | 200 | 620 | 625 | 630 | 1.8 | 2.1 | 2.4 | | | |
| 598-8230-102F | 598-8230-107F | Orange | | | 90 | 175 | 260 | 600 | 605 | 610 | 1.8 | 2.1 | 2.4 | | | |
| 598-8240-102F | 598-8240-107F | Yellow | | | 150 | 205 | 260 | 590 | 592 | 595 | 1.8 | 2.1 | 2.4 | | | |
| 598-8250-102F | 598-8250-107F | Yellow | | | 90 | 120 | 150 | 585 | 587 | 590 | 1.8 | 2.1 | 2.4 | | | |
| 598-8260-102F | 598-8260-107F | Yellow-Green | | | 43 | 70 | 100 | 570 | 572 | 575 | 1.8 | 2.1 | 2.4 | | | |
| 598-8270-102F | 598-8270-107F | Green | | | 18 | 30 | 43 | 562 | 566 | 570 | 1.8 | 2.1 | 2.4 | | | |
| 598-8281-102F | 598-8281-107F | Green | InGaN | | 260 | 580 | 900 | 517 | 525 | 530 | 2.8 | 3.2 | 3.5 | | | |
| 598-8291-102F | 598-8291-107F | Blue | | | 90 | 175 | 260 | 465 | 470 | 475 | 2.8 | 3.2 | 3.5 | | | |

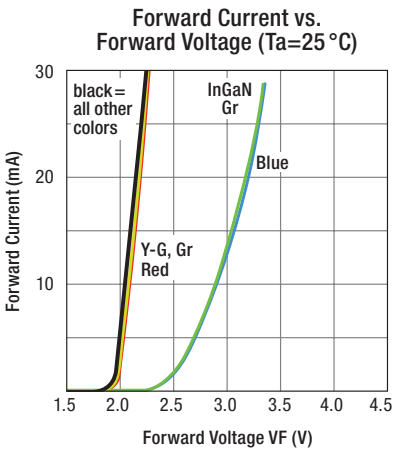

Absolute Maximum Ratings @ Ts=25°C

| | | | |
|-----------------------------------|-------------|------|--------------------|
| Power Dissipation (mW) | 72 | 105 | ● G - InGaN ● B |
| Forward Current (mA) | 30 | | |
| Reverse Voltage (V) | 5 | | |
| Operating Temp (°C) | -40 to +100 | | |
| Storage Temp (°C) | -40 to +100 | | |
| Peak Pulse Fw Current (mA) | 60 | | |
| Electrostatic Discharge (HBM) (V) | 2000 | 1000 | ● G - InGaN ● B |
| Junction Temp (°C) | 105 | | |

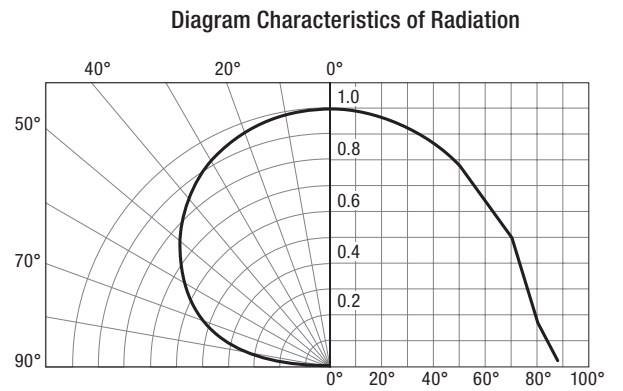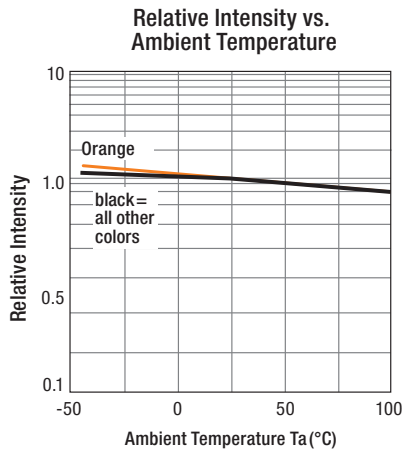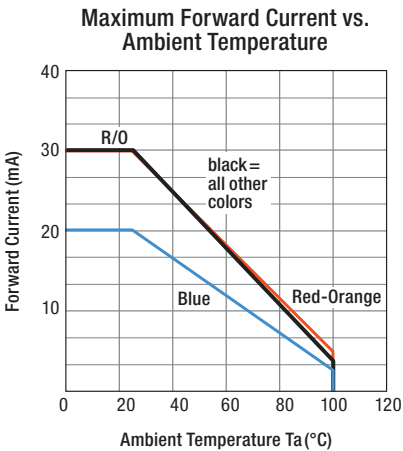

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.