
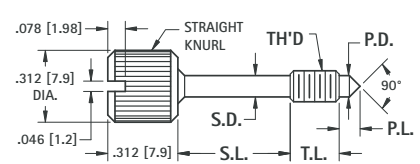


# CAPTIVE PANEL SCREWS


MATERIAL: Stainless Steel per ASTM-A581/A-582



| CAT. NO. | THREAD | S.D.<br>± .005 (.13) | S.L.<br>± .010 (.25) | W<br>+ .015 (+.38) - .000 |
|----------|--------|----------------------|----------------------|---------------------------|
| 8700     | 4-40   | .078 (2.0)           | .375 (9.5)           | .036 (.091)               |
| 8701     | 4-40   | .078 (2.0)           | .500 (12.7)          | .036 (.091)               |
| 8702     | 4-40   | .078 (2.0)           | .625 (15.9)          | .036 (.091)               |
| 8703     | 6-32   | .095 (2.41)          | .375 (9.5)           | .045 (1.14)               |
| 8704     | 6-32   | .095 (2.41)          | .500 (12.7)          | .045 (1.14)               |
| 8705     | 6-32   | .095 (2.41)          | .625 (15.9)          | .045 (1.14)               |



| CAT. NO. | THREAD | T.L.<br>± .015 (.38) | S.D.<br>± .005 (.13) | S.L.<br>± .010 (.25) | P.D.<br>+ .000, -.016 (-.40) | P.L.<br>± .015 (.38) |
|----------|--------|----------------------|----------------------|----------------------|------------------------------|----------------------|
| 8706     | 4-40   | .125 (3.2)           | .078 (2.0)           | .171 (4.3)           | .078 (2.0)                   | .078 (2.0)           |
| 8707     | 4-40   | .125 (3.2)           | .078 (2.0)           | .296 (7.5)           | .078 (2.0)                   | .078 (2.0)           |
| 8708     | 4-40   | .125 (3.2)           | .078 (2.0)           | .421 (10.7)          | .078 (2.0)                   | .078 (2.0)           |
| 8709     | 6-32   | .218 (5.5)           | .095 (2.41)          | .187 (4.7)           | .095 (2.41)                  | .093 (2.36)          |
| 8710     | 6-32   | .218 (5.5)           | .095 (2.41)          | .312 (7.9)           | .095 (2.41)                  | .093 (2.36)          |
| 8711     | 6-32   | .218 (5.5)           | .095 (2.41)          | .437 (11.1)          | .095 (2.41)                  | .093 (2.36)          |

## 4-40





| CAT. NO. | LENGTH      |
|----------|-------------|
| 2413     | .469 (11.9) |
| 2414     | .531 (13.4) |

## 6-32



| CAT. NO. | LENGTH      |
|----------|-------------|
| 2415     | .531 (13.5) |
| 2416     | .593 (15.1) |
| 2417     | .656 (16.7) |


## 8-32



| CAT. NO. | LENGTH      |
|----------|-------------|
| 2418     | .656 (16.7) |
| 2419     | .718 (18.2) |
| 2420     | .781 (19.8) |

# THUMB SCREWS


## STAINLESS



MATERIAL: Stainless Steel

| CAT. NO. | LENGTH      | THREAD | DIA.       |
|----------|-------------|--------|------------|
| 2400     | .312 (7.9)  | 4-40   | .312 (7.9) |
| 2401     | .375 (9.5)  |        |            |
| 2402     | .437 (11.1) |        |            |
| 2403     | .500 (12.7) |        |            |
| 2404     | .312 (7.9)  | 6-32   | .312 (7.9) |
| 2405     | .375 (9.5)  |        |            |
| 2406     | .437 (11.1) |        |            |
| 2407     | .500 (12.7) |        |            |
| 2408     | .375 (9.5)  | 8-32   | .375 (9.5) |
| 2409     | .437 (11.1) |        |            |
| 2410     | .500 (12.7) |        |            |


## BRASS



MATERIAL: Brass,  
Nickel Plate

| CAT. NO. | THREAD |
|----------|--------|
| 1708     | 6-32   |
| 1709     | 8-32   |
| 1710     | 10-32  |

## NYLON



MATERIAL: Nylon 6/6, UL Rated 94V-2

| CAT. NO. | LENGTH      | THREAD | DIA.        | H          | A          |
|----------|-------------|--------|-------------|------------|------------|
| 2500     | .250 (6.4)  | 4-40   | .300 (7.6)  | .280 (7.1) | .125 (3.2) |
| 2501     | .375 (9.5)  |        |             |            |            |
| 2502     | .500 (12.7) |        |             |            |            |
| 2503     | .250 (6.4)  |        |             |            |            |
| 2504     | .375 (9.5)  | 6-32   | .360 (9.1)  | .275 (7.0) | .125 (3.2) |
| 2505     | .500 (12.7) |        |             |            |            |
| 2506     | .250 (6.4)  |        |             |            |            |
| 2507     | .375 (9.5)  |        |             |            |            |
| 2508     | .500 (12.7) | 8-32   | .425 (10.8) | .305 (7.7) | .140 (3.6) |
| 2509     | .500 (12.7) |        |             |            |            |