
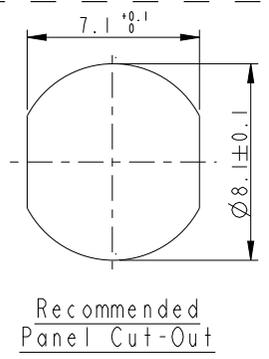
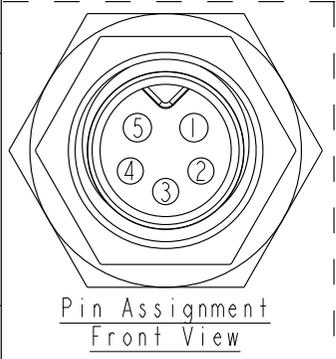


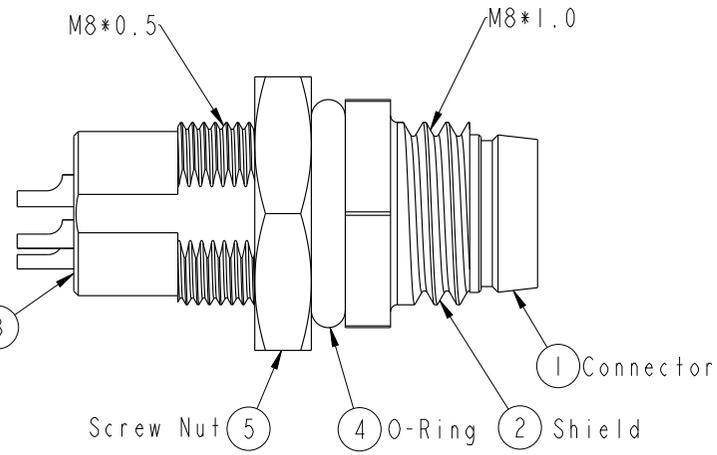
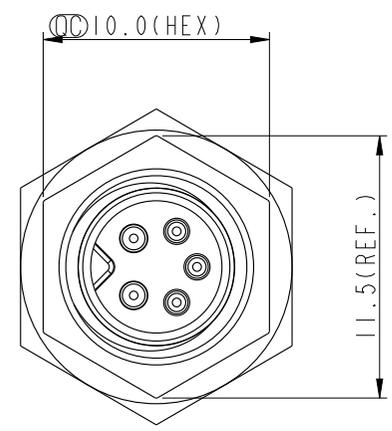
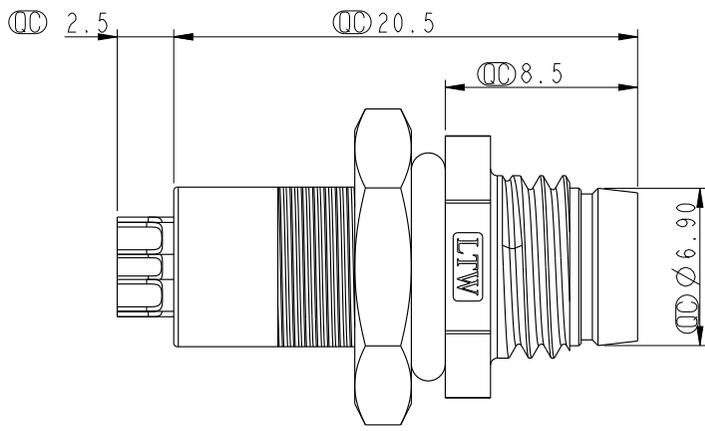


|      |         |      |      |             |
|------|---------|------|------|-------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|      |         |      |      |             |

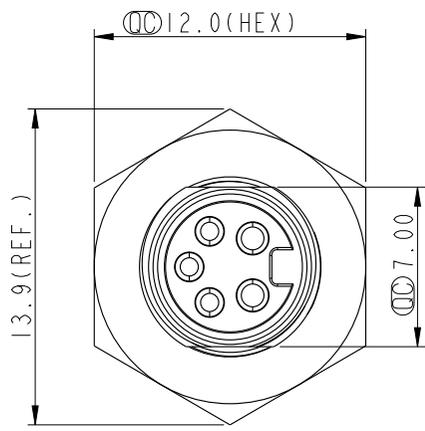

Note:  
 \*  $\varnothing$  Important Dimension.  
 \* Waterproof Rate: IP67.  
 \* Housing: Nylon+GF, Black.  
 \* Male Pin: Copper Alloy, Gold Plated.  
 \* Shield: Zinc Alloy, Nickel Plated.  
 \* Screw Nut: Copper Alloy, Nickel Plated.  
 \* O-Ring: EPDM, Black.  
 \* For Panel Thickness Max 3.5mm.  
 \* Nut Torque: 4-6 kgf.cm.

|           |          |  |
|-----------|----------|--|
| UNIT:mm   |          |  |
| TOLERANCE | .X ±0.25 |  |
| .XX       | ±0.1     |  |
| .XXX      | ±0.05    |  |
| ANGLES    | ±1°      |  |

|                                      |                |                                 |  |
|--------------------------------------|----------------|---------------------------------|--|
| TITLE<br>M8 5Pin Panel M Conn. M Pin |                |                                 |  |
| SCALE<br>3:1                         | SIZE<br>A4     | SHEET 1 OF 1                    |  |
| REV.<br>A                            | WC-REV.<br>A.1 | $\varnothing$ : Inspection item |  |

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

|                             |                      |                    |
|-----------------------------|----------------------|--------------------|
| ITEM NO<br>8H-05PMMS-SH7001 | DRAWN BY<br>Mila     | DATE<br>2014-01-06 |
| DWG NO<br>8H-05PMMS-SH7001  | CHECKED BY<br>Jimmy  | DATE<br>2014-01-06 |
| CUSTOMER<br>ALTW            | APPROVED BY<br>Jerry | DATE<br>2014-01-06 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.