

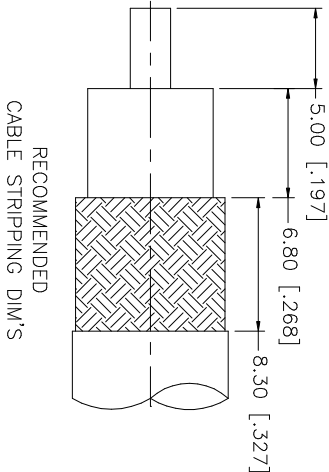
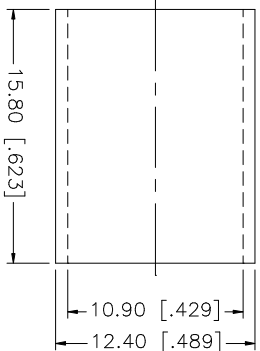


DESCRIPTION		
REV.	DATE	
A	11/21/02	UPDATE END CAP / REFORMAT DRAWING
B	03/06/03	UPDATE DRAWING FORMAT

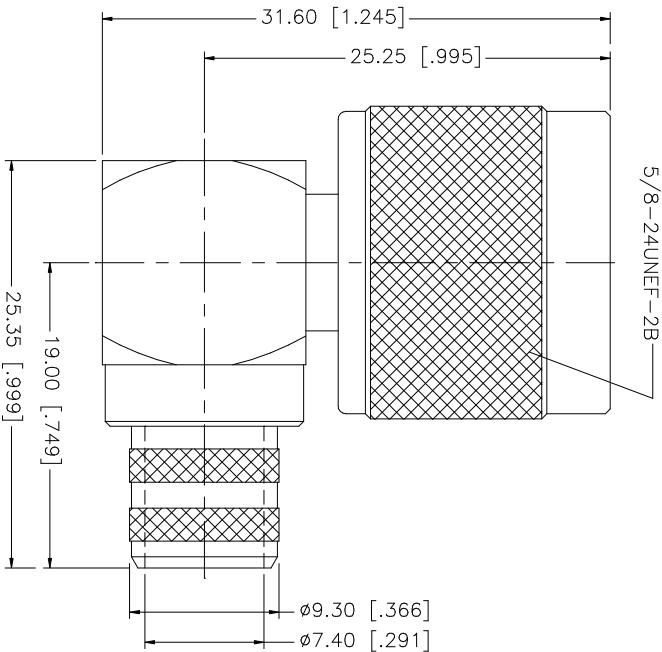

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	
8	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	APPROVALS
7	CLAMP NUT	BRASS	NEXCOTE	1	0.5 - 8mm ± 0.20mm	DATE
6	RETAINER RING	SUS 304	NATURAL	1	8 - 30mm ± 0.40mm	
5	GASKET	SILICONE	RED	1	30 - 120mm ± 0.50mm	DRAWN
4	CONTACT PIN	BER. COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	G.R.S.
3	INSULATOR	TEFLON	NATURAL	1	.020 - .315 = ± 0.007"	03/06/03
2	SHELL	BRASS	NEXCOTE	1	.315 - 1.180 = ± 0.015"	
1	BODY/BARREL	BRASS	NEXCOTE	1	1.180 - 4.724 = ± 0.020"	
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	
						CAD FILE
						C:/172/172176.DWG
						DWG. NO.
						172176.DWG
						REV.
						NC
						SIZE
						A
						SCALE
						NA
Amphenol Connex						
PART DESCRIPTION						
N R/A CRIMP PLUG						
(FOR RG-8/U, 213/U, 393/U CABLE)						
PART NO.						
172176						

Amphenol Connex