

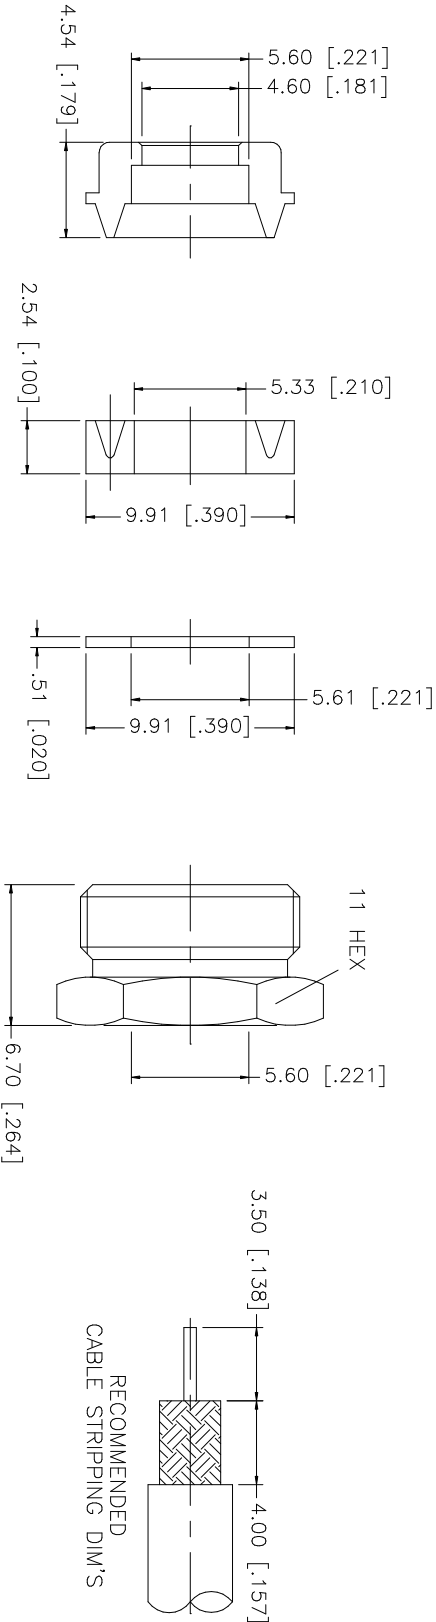


REV.	DATE	DESCRIPTION
NC	07/19/05	INITIAL RELEASE

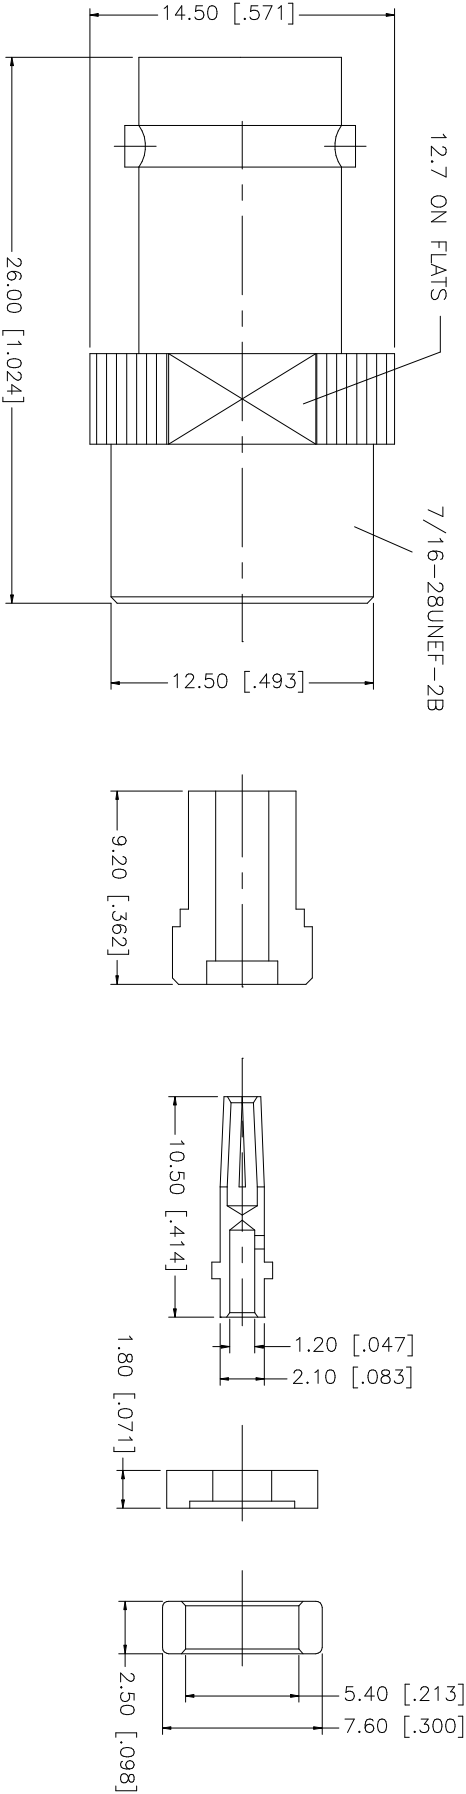

RECOMMENDED
CABLE STRIPPING DIM'S



9	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	DO NOT SCALE DRAWING	CAD FILE C:/112/112372.DWG	DWG. NO. 112372.DWG	REV. NC	SIZE A	SCALE NA
8	WASHER	BRASS	NICKEL	1							
7	GASKET	SILICONE	RED	1							
6	BRAD CLAMP	BRASS	NICKEL	1							
5	RING	BRASS	NICKEL	1							
4	INSULATOR	TEFLON	NATURAL	1							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	PART DESCRIPTION BNC CLAMP JACK (FOR RG-58C/U, 58/U, 142A/U, 223/U)	SHEET 1 OF 1	PART NO. 112372				
2	INSULATOR	TEFLON	NATURAL	1							
1	BODY	BRASS	NICKEL	1							
	DESCRIPTION	MATERIAL	FINISH	QTY							

Amphenol Connex