
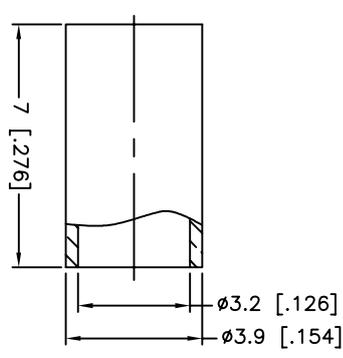
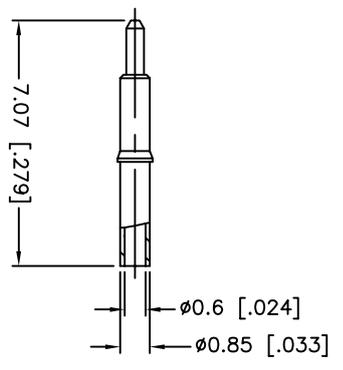
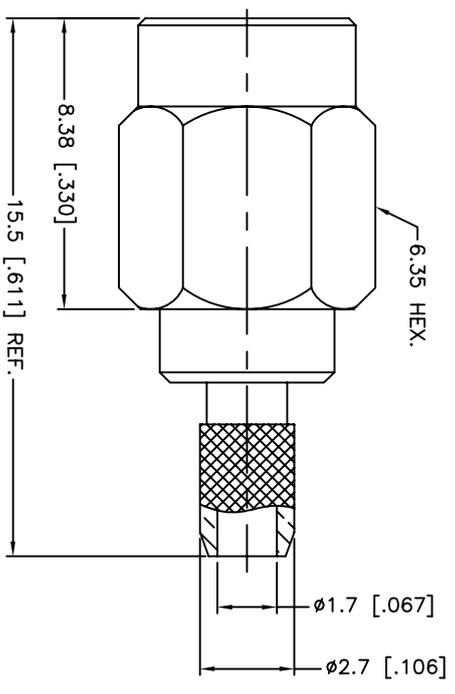


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/21/09	XXXXXX	INITIAL RELEASE

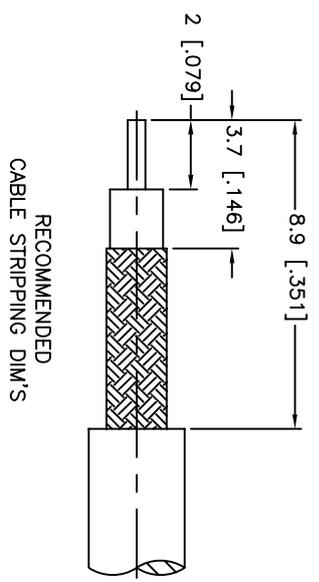

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

QTY	DESCRIPTION	FINISH	MATERIAL
1	SHELL	GOLD	BRASS
1	OUT CONTACT	GOLD	BRASS
1	INSULATOR	NATURAL	PTFE
1	RETAINER RING	RED	SILICONE
1	CONTACT PIN	GOLD	BRASS
1	FERRULE	GOLD	BRASS

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M. ZHANG	07/24/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

Amphenol Connex

SSMA CRIMP PLUG
(FOR RG-174/U, 188A/U, 316/U)

PART NO. 133101

DWG. NO. 133101N.DWG

REV. NC SIZE A SCALE NA