


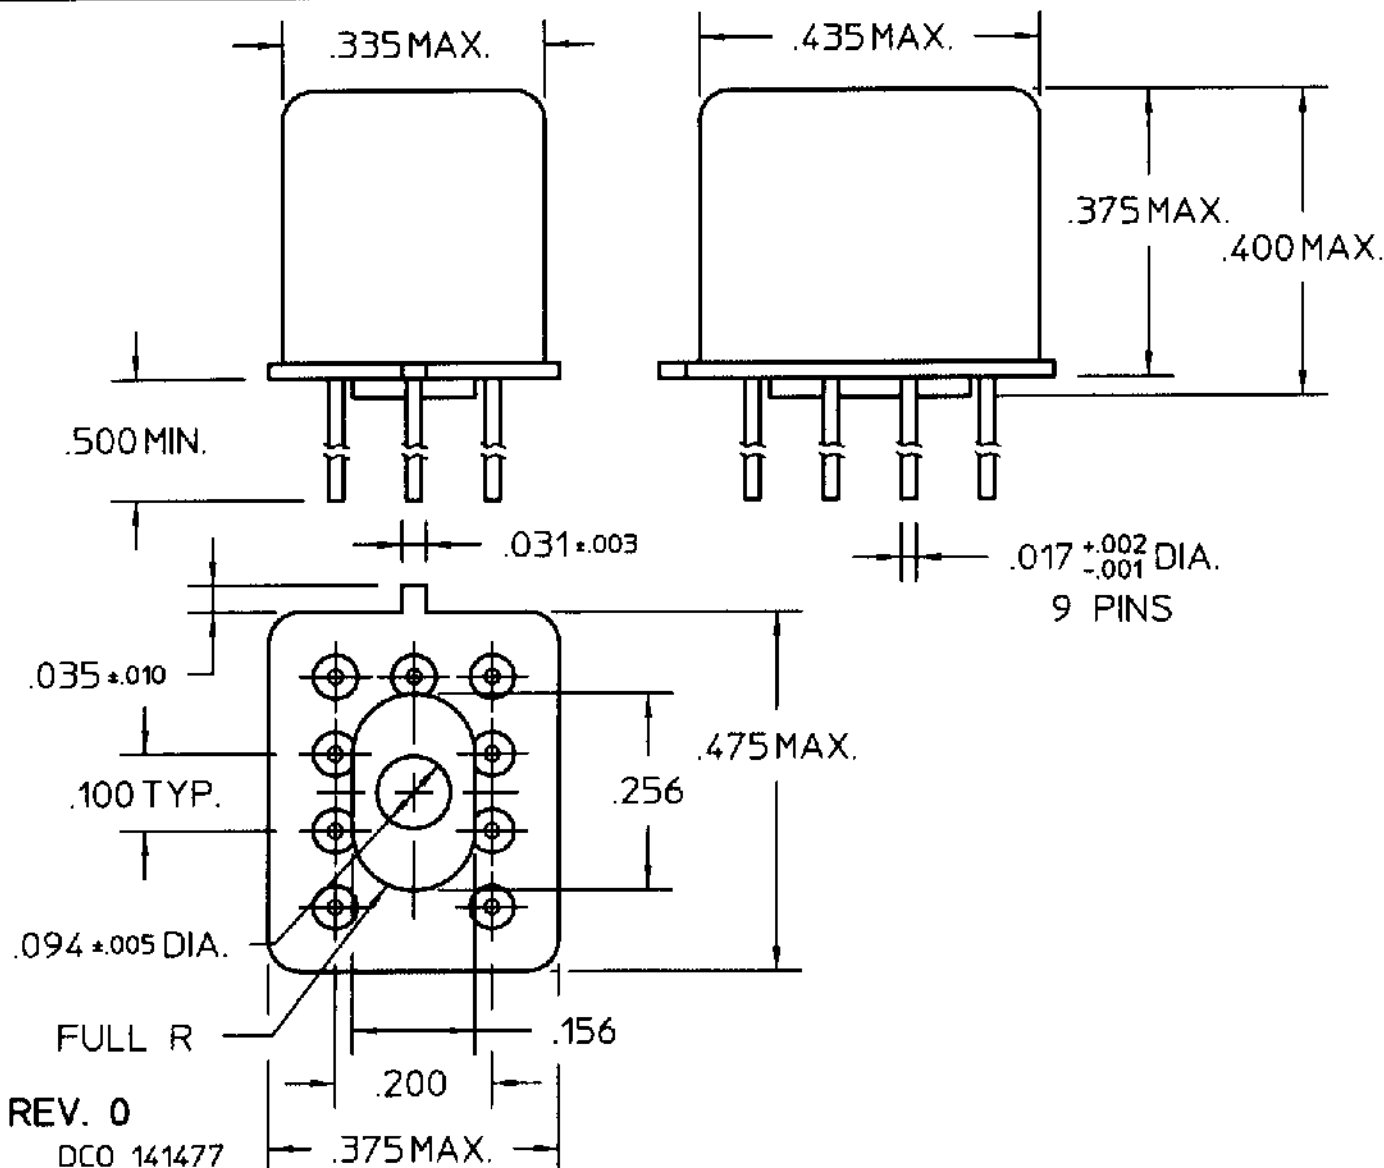

COIL: @ 25°C
RESISTANCE 3200 OHMS ±10%
NOMINAL VOLTAGE 26.5 VDC
MUST OPERATE 14.2 VDC
GATE TURN-ON 4.3 VDC MIN., TURN-OFF 0.5 VDC MAX.
MUST RELEASE 8.0 VDC MAX, 1.3 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's
SHOCK 75 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.

RELEASE TIME 7.5 MS MAX.

CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
26 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11/5/99

CKD 11/5/99



COMMUNICATIONS
INSTRUMENTS, INC.

CUST. OPL
CUST. NO. M28776/7-012M REV.

'MGST' RELAY

JMGST-26MW