

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20







© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUL2015	DL	CW

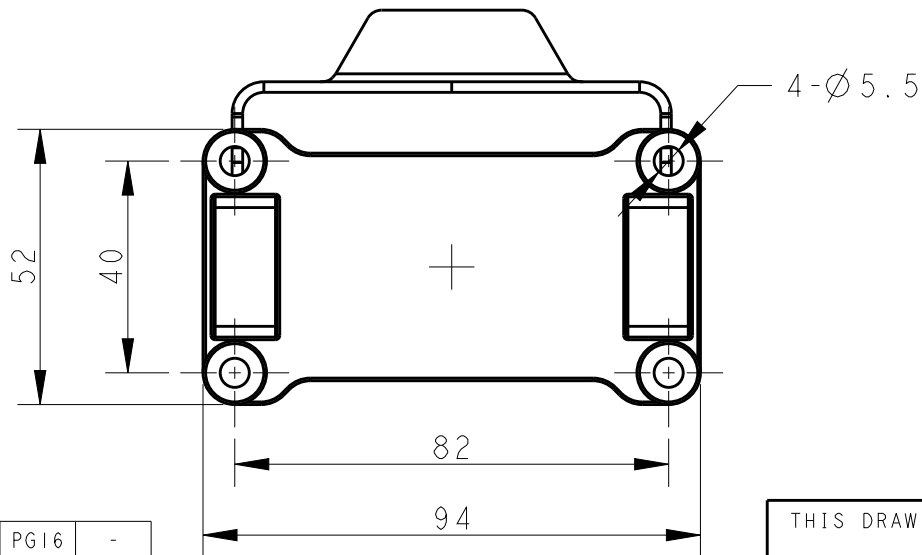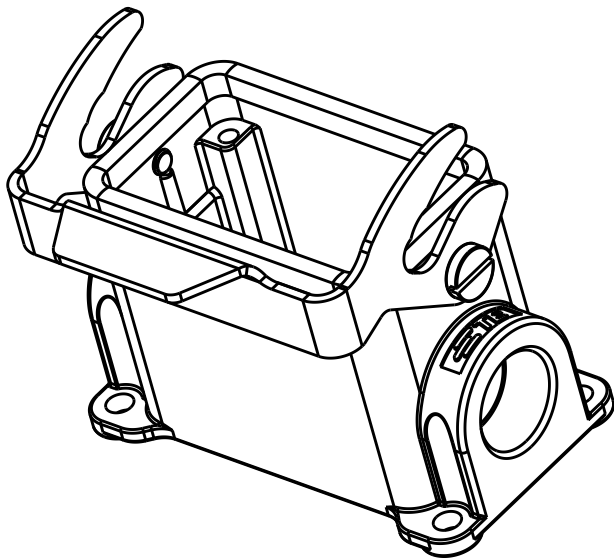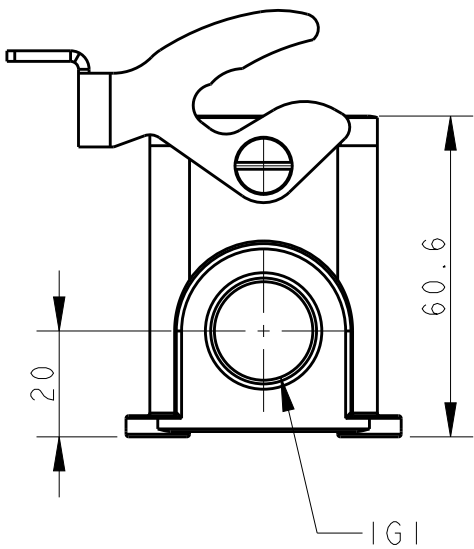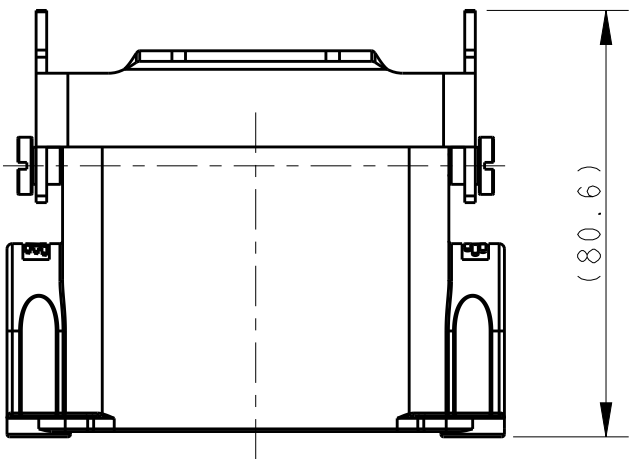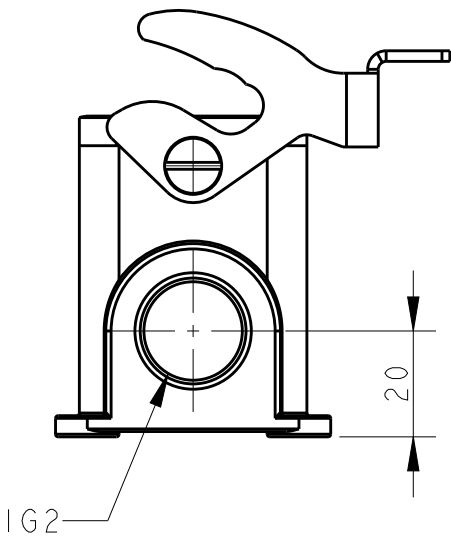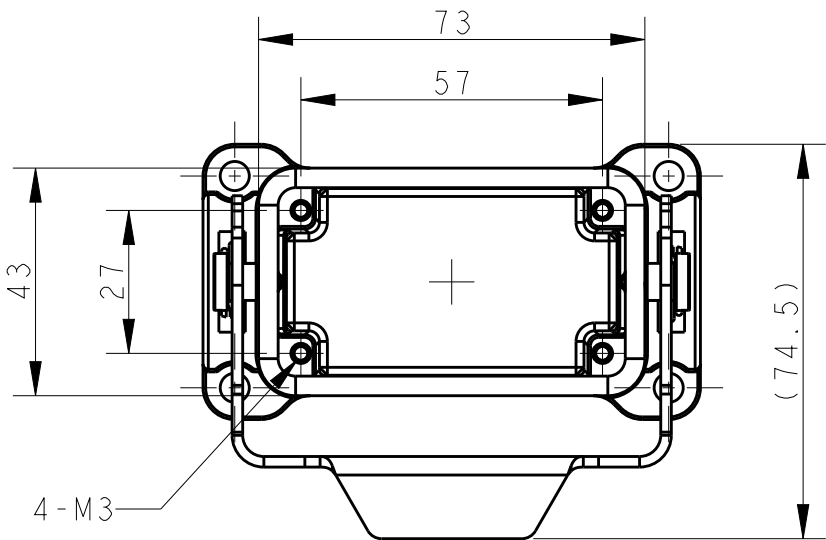

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610103116-000	H10B-SGR-LB-PG16	PG16	-
TI610103120-000	H10B-SGR-LB-M20	M20	-
TI610103121-000	H10B-SGR-LB-PG21	PG21	-
TI610103125-000	H10B-SGR-LB-M25	M25	-
TI610103216-000	H10B-SGR-LB-2PG16	PG16	PG16
TI610103220-000	H10B-SGR-LB-2M20	M20	M20
TI610103221-000	H10B-SGR-LB-2PG21	PG21	PG21
TI610103225-000	H10B-SGR-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUL2015		 TE Connectivity															
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME H10B-SGR-LB-PG															
		0 PLC	±-																
		1 PLC	±-																
MATERIAL TBD -	FINISH - -	2 PLC	±-	APVD XU XIANG 08JUL2015		SIZE A3		CAGE CODE -		DRAWING NO C-TI610103XXX000		RESTRICTED TO -							
		3 PLC	±-	PRODUCT SPEC															
		4 PLC	±-	108-137013															
		ANGLES	±-	APPLICATION SPEC															
				114-137013															
		WEIGHT		-															
CUSTOMER DRAWING								SCALE		7:10		SHEET		1 OF 1		REV		A	