

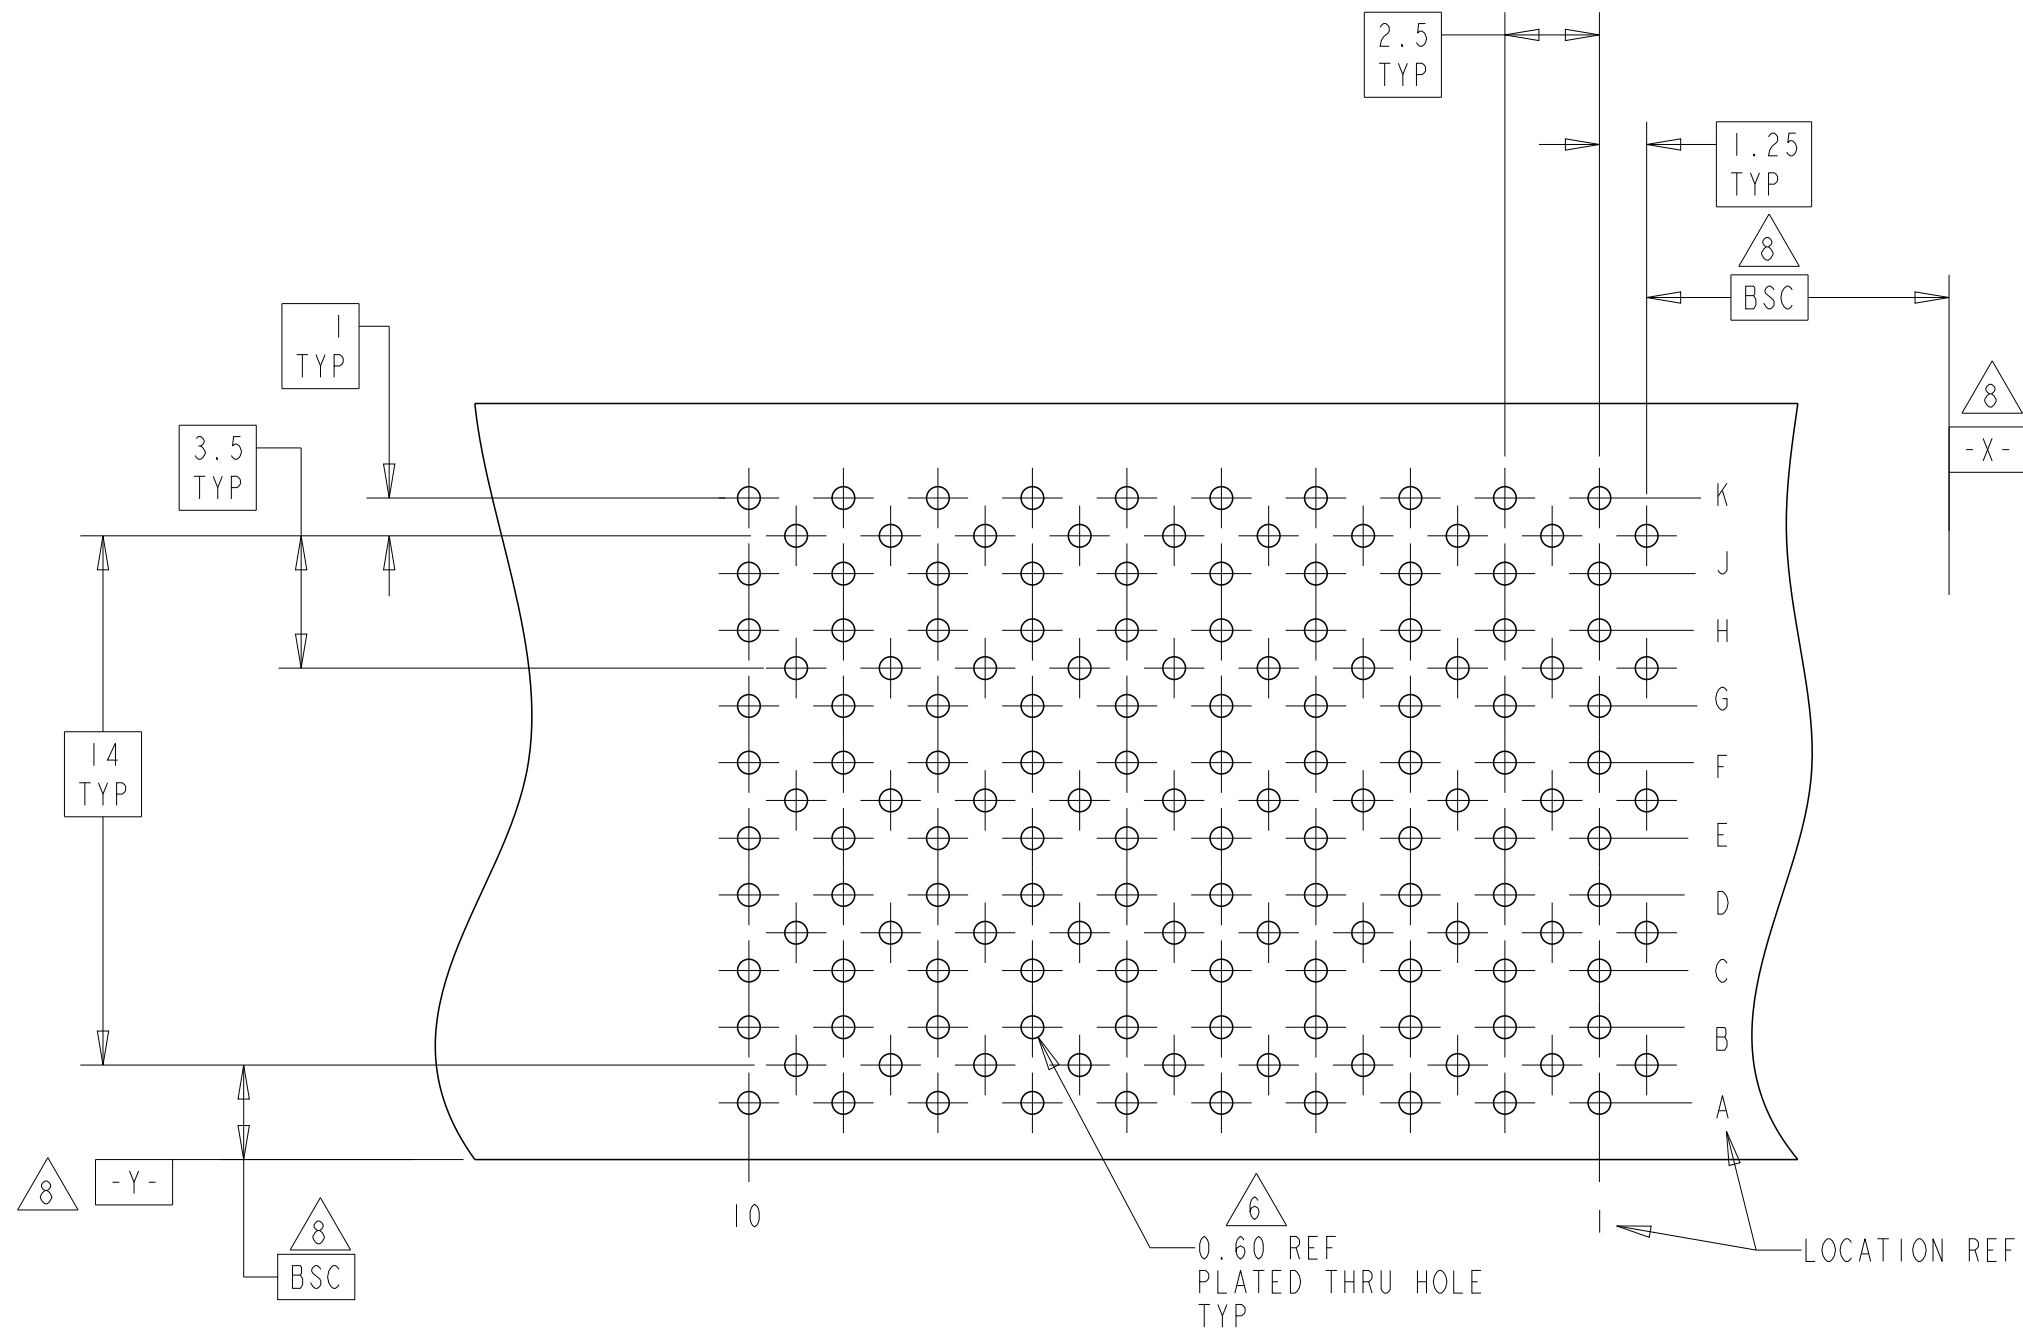
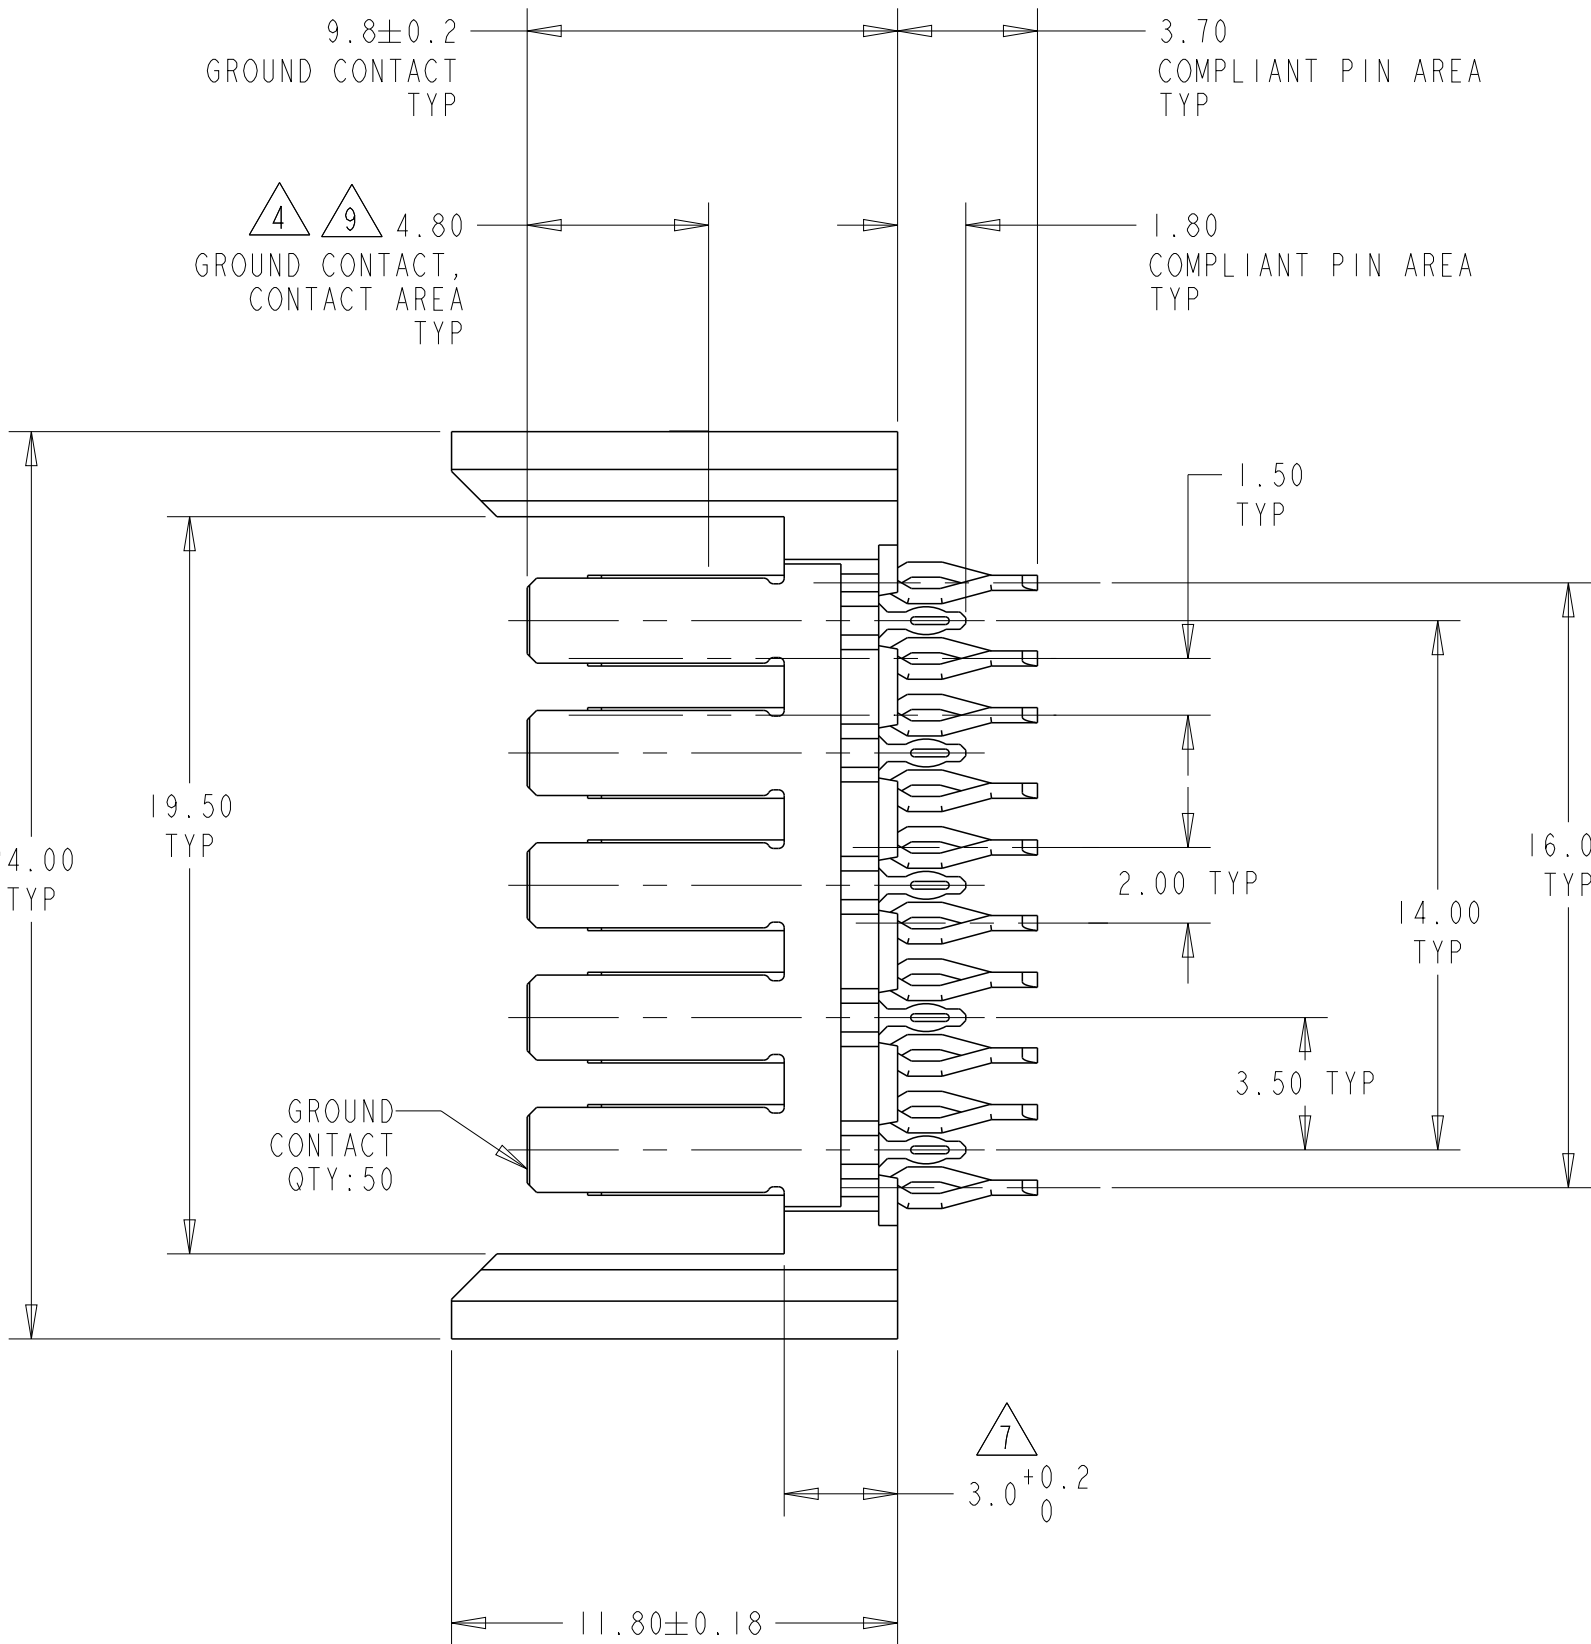
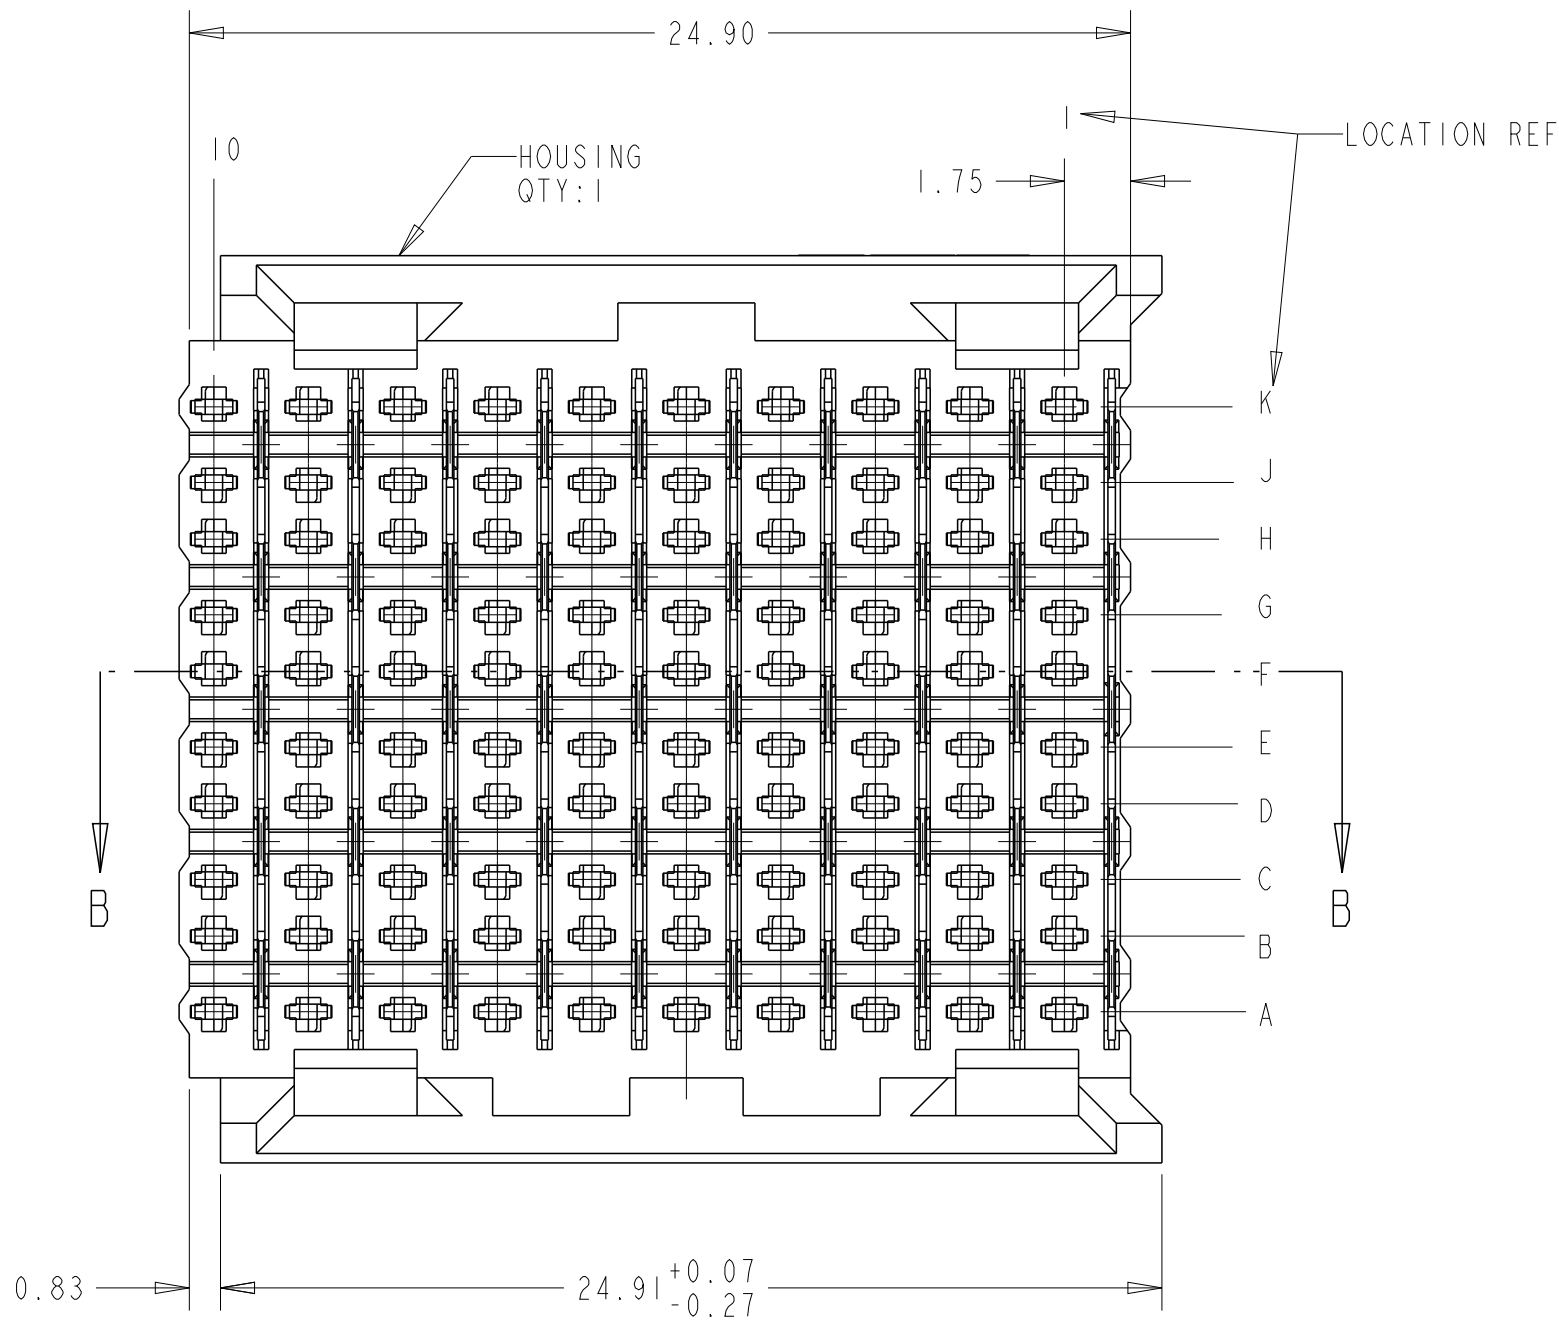


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
AD	00		A	REVISED PER ECO-13-004852	16APR2013	KH RP

- 2 PHOSPHOR BRONZE
- 3 LCP, UL94V-0
- 4 GOLD FLASH OVER 0.30µm MIN PALLADIUM-NICKEL OVER 1.27µm MIN NICKEL UNDERPLATE ON CONTACT AREA. 0.76µm MIN TIN OVER 1.27µm MIN NICKEL ON COMPLIANT PIN AREA
- 5 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7 APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

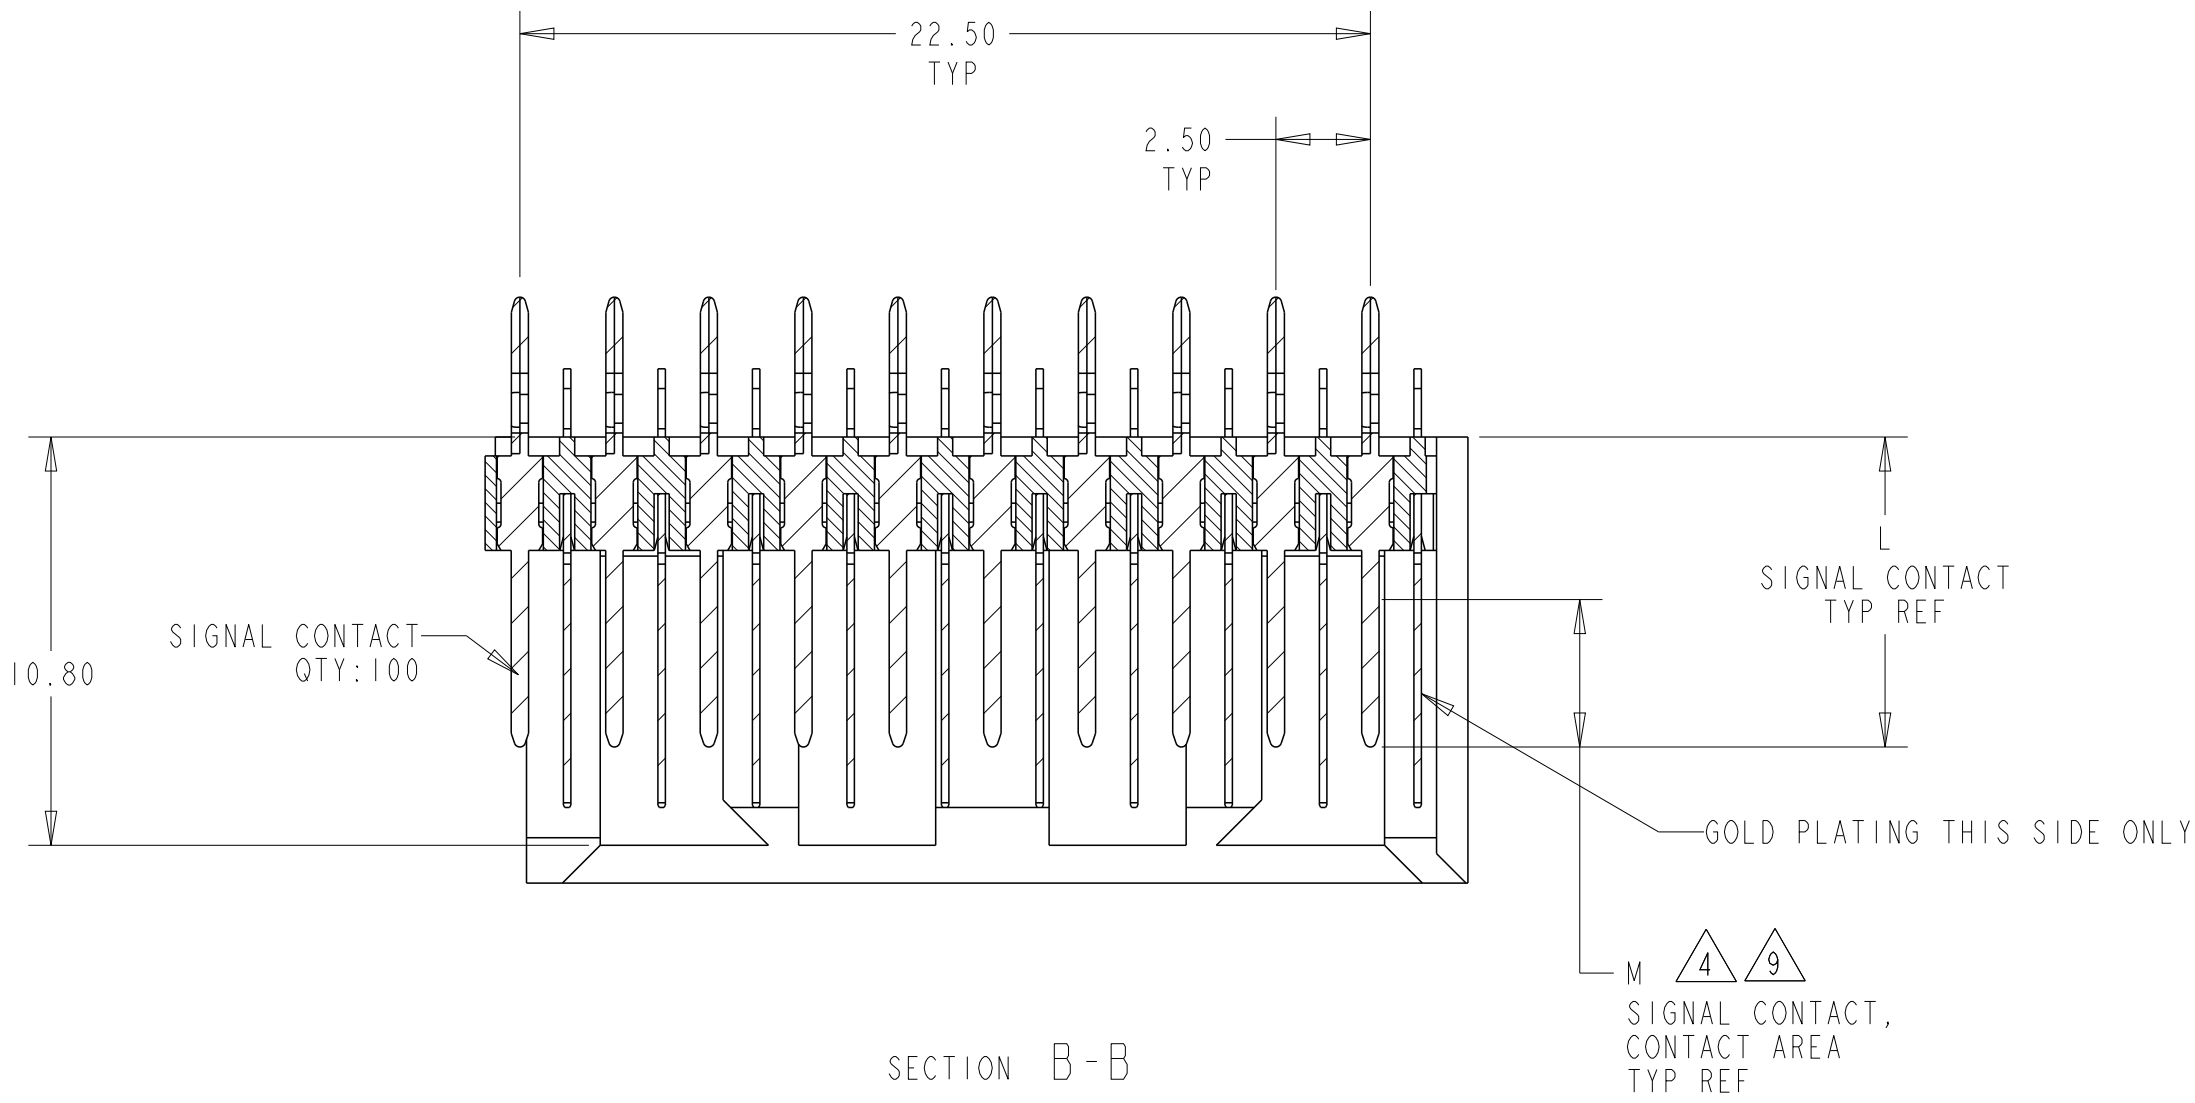

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

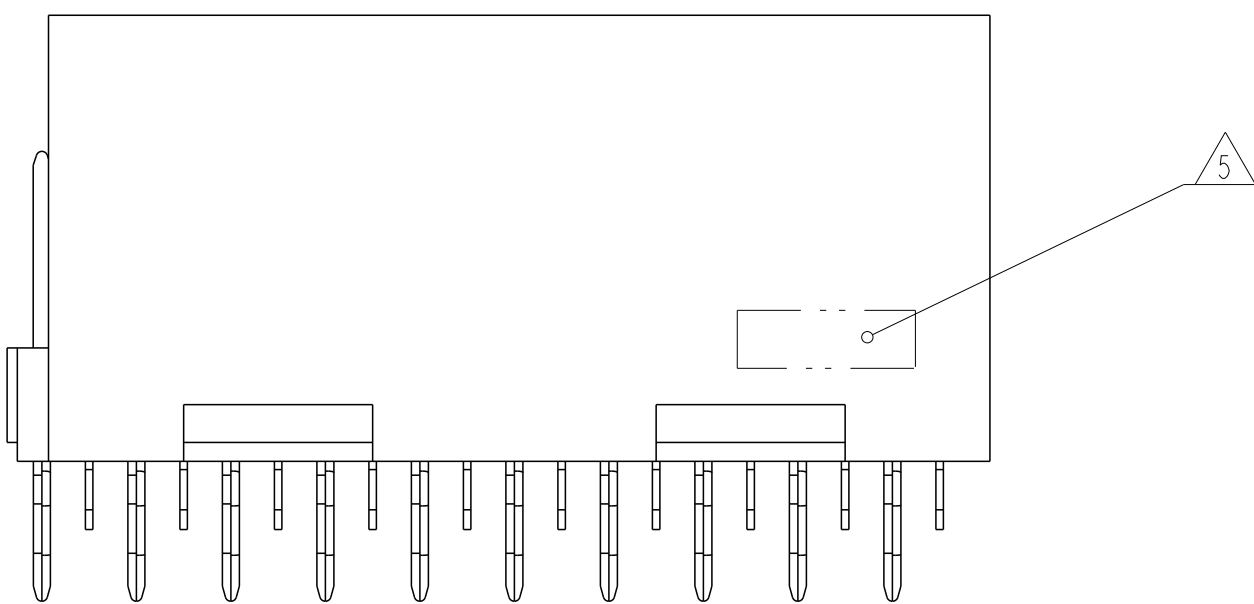

3.90	8.2	6645401-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	06DEC04	NAME HEADER ASSEMBLY, 100 POSN, Z-PACK HS3 BACKPLANE CONNECTOR		
DIMENSIONS: mm		CHK M. BOWERS	06DEC04			
		APVD M. BOWERS	06DEC04	SIZE A1		
		PRODUCT SPEC		CAGE CODE 00779		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		DRAWING NO 6645401		
0 PLC ±		WEIGHT	-	RESTRICTED TO		
1 PLC ±				SCALE 5:1		
2 PLC ±0.13				SHEET 1		
3 PLC ±0.05				OF 1		
4 PLC ±				REV A		
ANGLES						
FINISH						
MATERIAL						
HOUSING: 3						
CONTACTS: 2						
SIGNAL CONTACT: 4						