
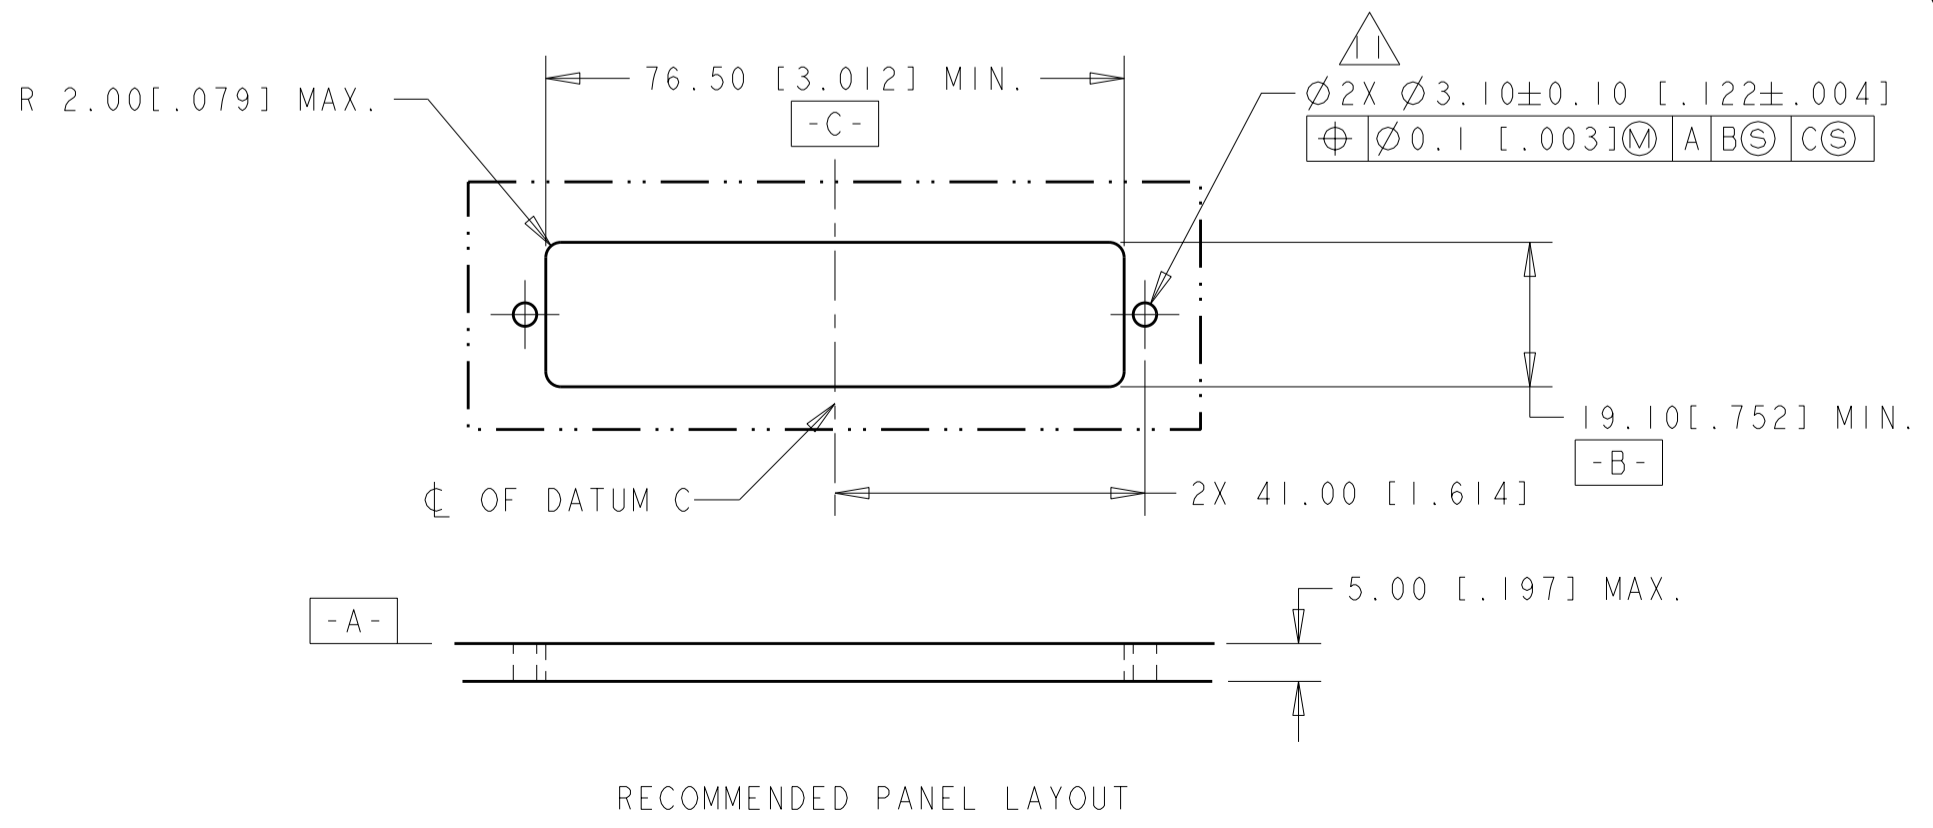


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		RELEASED PER ECO-11-011851	10JUN2011	RJM3 KH

- 1 SHELL: ALUMINUM ALLOY 6061 T651
 INSERT RETENTION CLIP & GROUNDING SPRING: COPPER ALLOY PER ASTM B194
 PROTECTIVE COVER: THERMOPLASTIC ELASTOMER.
- 2 SHELL: ELECTROLESS NICKEL PER SAE AMS-C-26074, CLASS 1.
 GROUNDING SPRING: ELECTROLYTIC NICKEL PER SAE AMS-QQ-290.
- 3 DATE CODE - YEAR & WEEK (YY WW)
- 4 INDEXING POINT FOR POLARIZATION.
- 5 4-40 SCREWS ARE REQUIRED FOR PANEL MOUNTING (NOT INCLUDED)
 RECOMMENDED TORQUE 1.1 N-m [10 in-lb] MIN.
- 6 THREADED HOLES ARE SELF-LOCKING, HAVING THE SPIRALOCK THREAD FORM.
 SPIRALOCK IS A REGISTERED TRADEMARK OF SPIRALOCK CORPORATION.
- 7 SHELL CAVITY FOR GPRB SERIES INSERTS WITH KEYING CODE A.
- 8 SHELL CAVITY FOR GPRB SERIES INSERTS WITH KEYING CODE B.
- 9 PROTECTIVE COVERS NOT SHOWN FOR CLARITY.
- 10 POLARIZATION FEATURE TO PREVENT FRONT PANEL MOUNTING.
- 11 SCREW HEAD DIAMETER: 6.00 [.236] MAX.
- 12. PITCH FOR SIDE-BY-SIDE MOUNTING: 19.50 [.768] MIN.
- 13. DESCRIPTIVE PART NUMBER: GPRB2HL3N
 SERIES: GPRB
 SHELL SIZE: 2 (TWO-CAVITY SHELL)
 SHELL STYLE: H (RECEPTACLE WITH GROUNDING SPRINGS)
 MODIFICATION CODE: L (2x 4-40 UNC MOUNTING HOLES FOR REAR PANEL-MOUNTING)
 WITH SELF LOCKING MOUNTING HOLES.
 POLARIZATION CODE: 3 (LOCKING & POLARIZING HARDWARE PURCHASED SEPARATELY)
 SHELL PLATING: N (NICKEL PLATING)
- 14. THIS PRODUCT IS SOLD BY TE CONNECTIVITY UNDER A LICENSE FROM RADIALL SA.

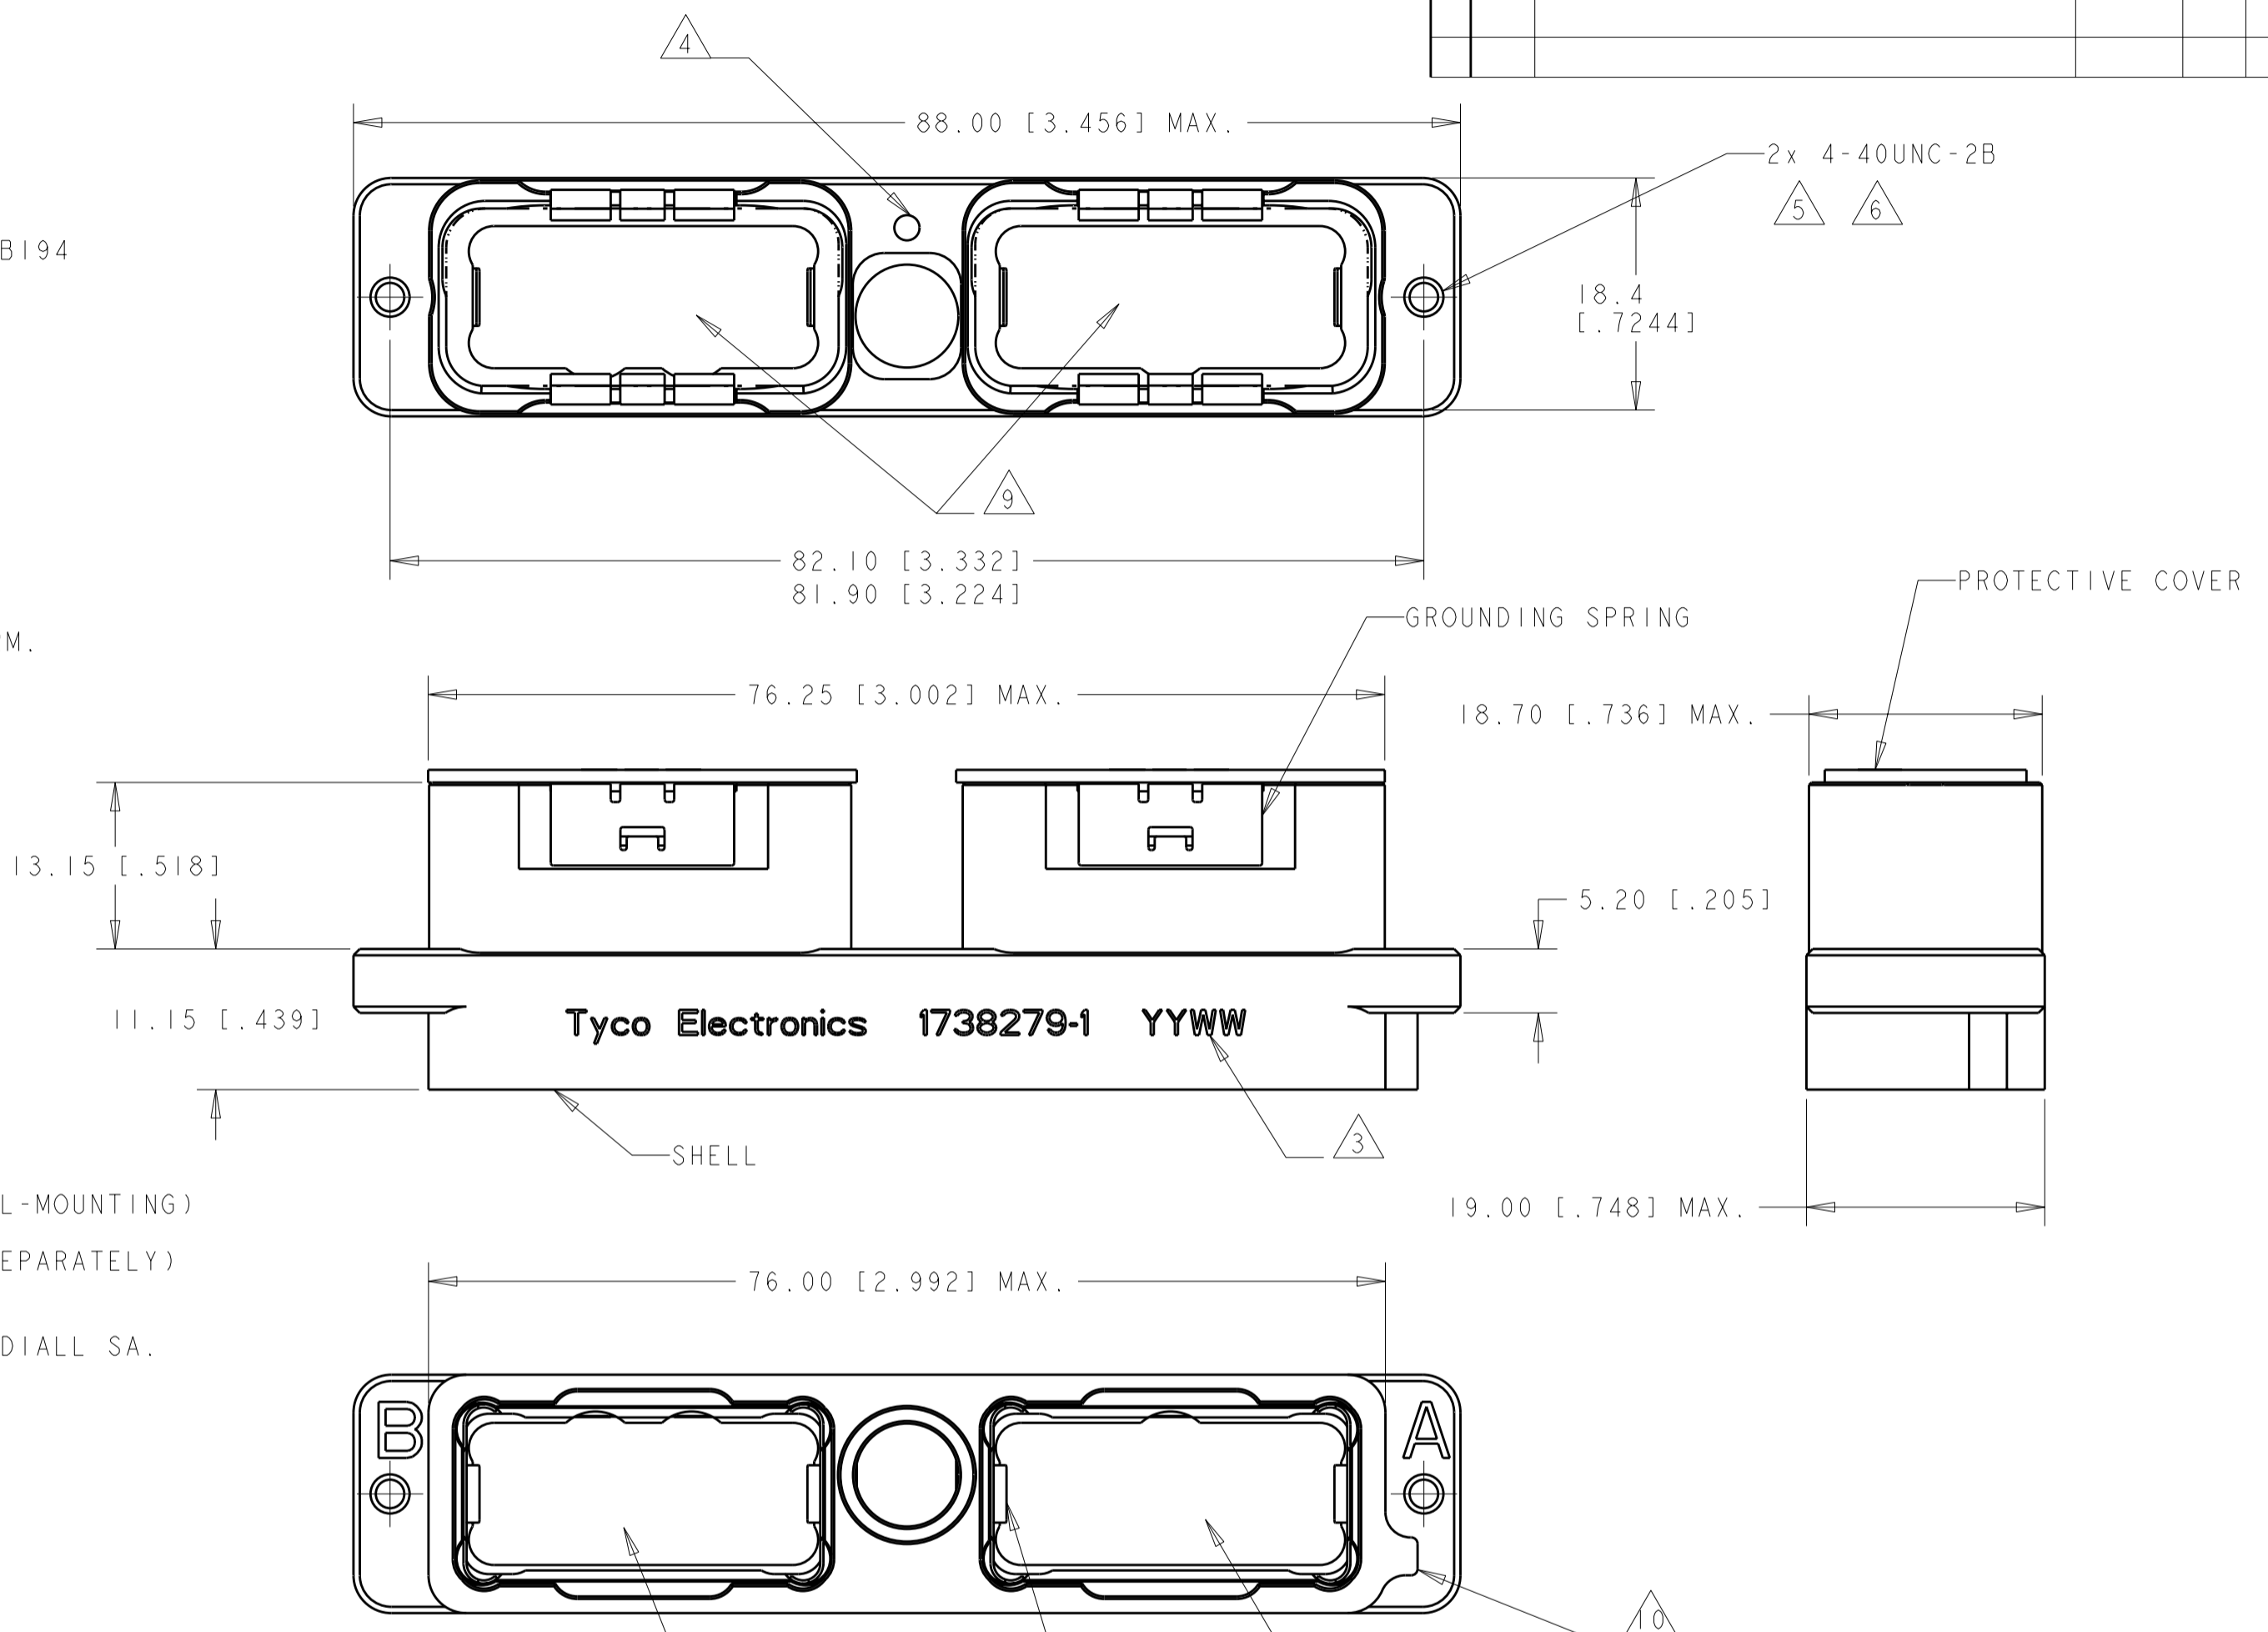

1738279-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: CJV 28NOV2005	TE Connectivity	
DIMENSIONS: mm		CHK: JPM 28NOV2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: JPM 28NOV2005	NAME: RECEPTACLE SHELL ASSEMBLY REAR PANEL MOUNT GPRB2	
0 PLC ±-		PRODUCT SPEC	SIZE: A2	
1 PLC ±0.5		APPLICATION SPEC	CAGE CODE: 00779	
2 PLC ±0.13		WEIGHT: -	DRAWING NO: 1738279	
3 PLC ±0.013		RESTRICTED TO: -	SCALE: 2:1	
4 PLC ±0.0001		CUSTOMER DRAWING	SHEET 1 OF 1	
ANGLES ±-			REV A	
FINISH				