






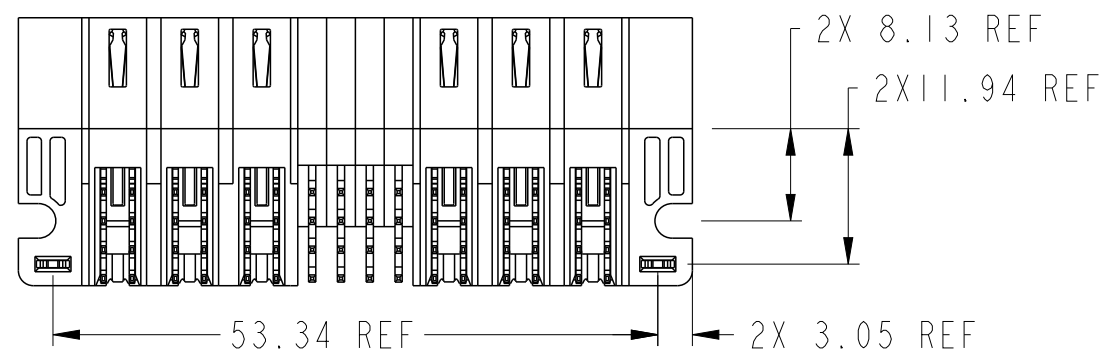

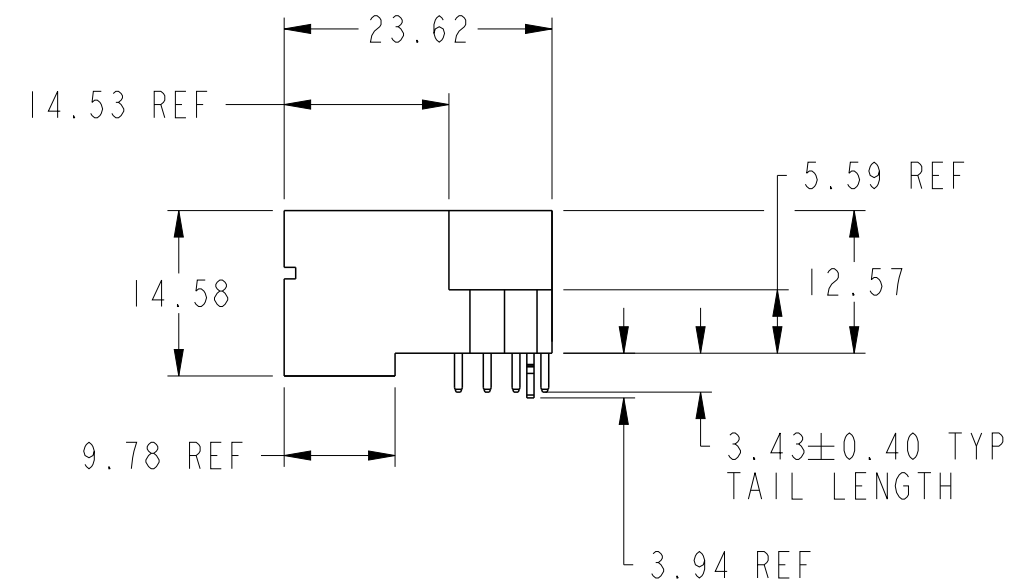

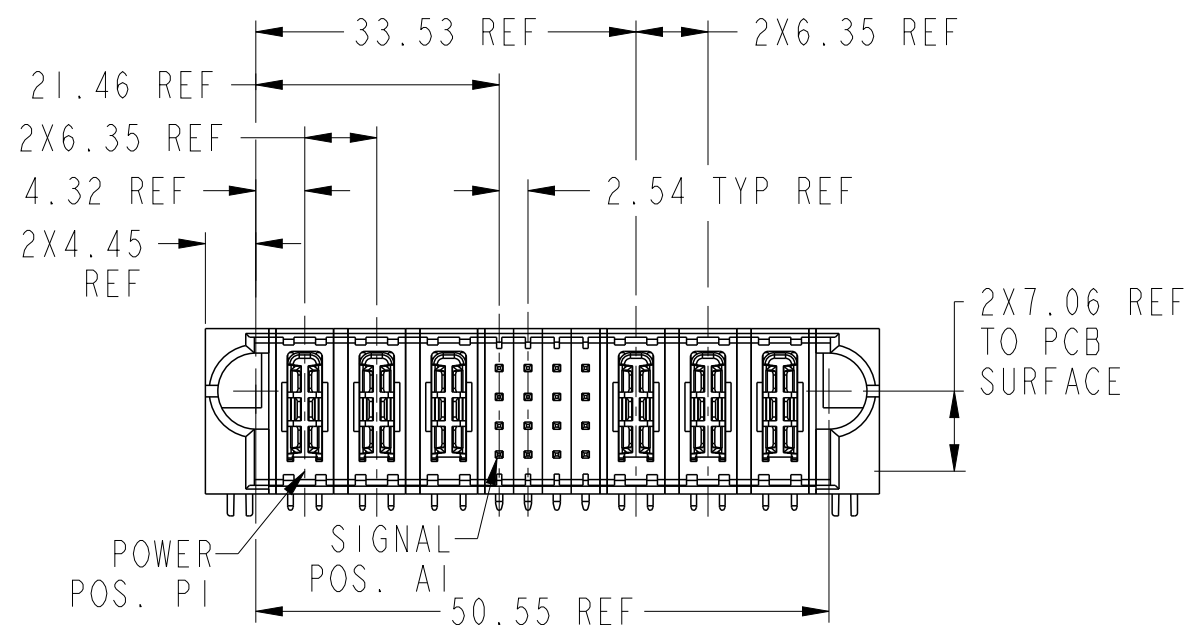

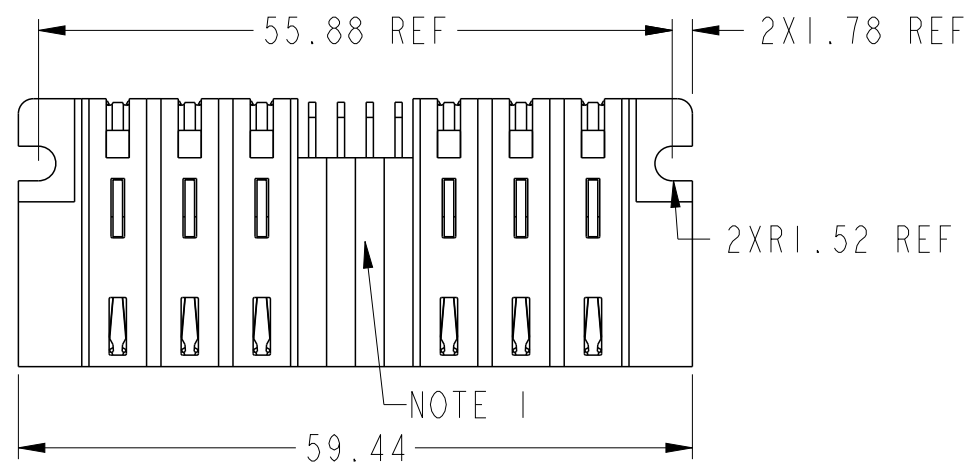




















PRODUCT NUMBER SEE SHEET 2




spec ref		*		dr	Eddy Zeng	2013/12/16	projection		MM		size	A3	scale	3:2
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Eddy Zeng	2014/01/02					ecn no	-		
				chr	Li-He	2014/01/02								
				appr	Pei-Ming Zheng	2014/01/02					product family		PwrBlade+	rel level
ASME Y14.5														
surface		linear	0.X	±0.5		title 3HP + 16S + 3HP RA STB HEADER				dwg no	10106124-6004001		rev	A
			0.XX	±0.25										
			0.XXX	±0.10										
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw				sheet 1 of 3			



Copyright FCI.

PRODUCT NO.	ROWS	HIGH POWER				SIGNAL				HIGH POWER			
		E1	P1	P2	P3	1	2	3	4	P4	P5	P6	E2
10106124-6004001LF	DCBA												
													

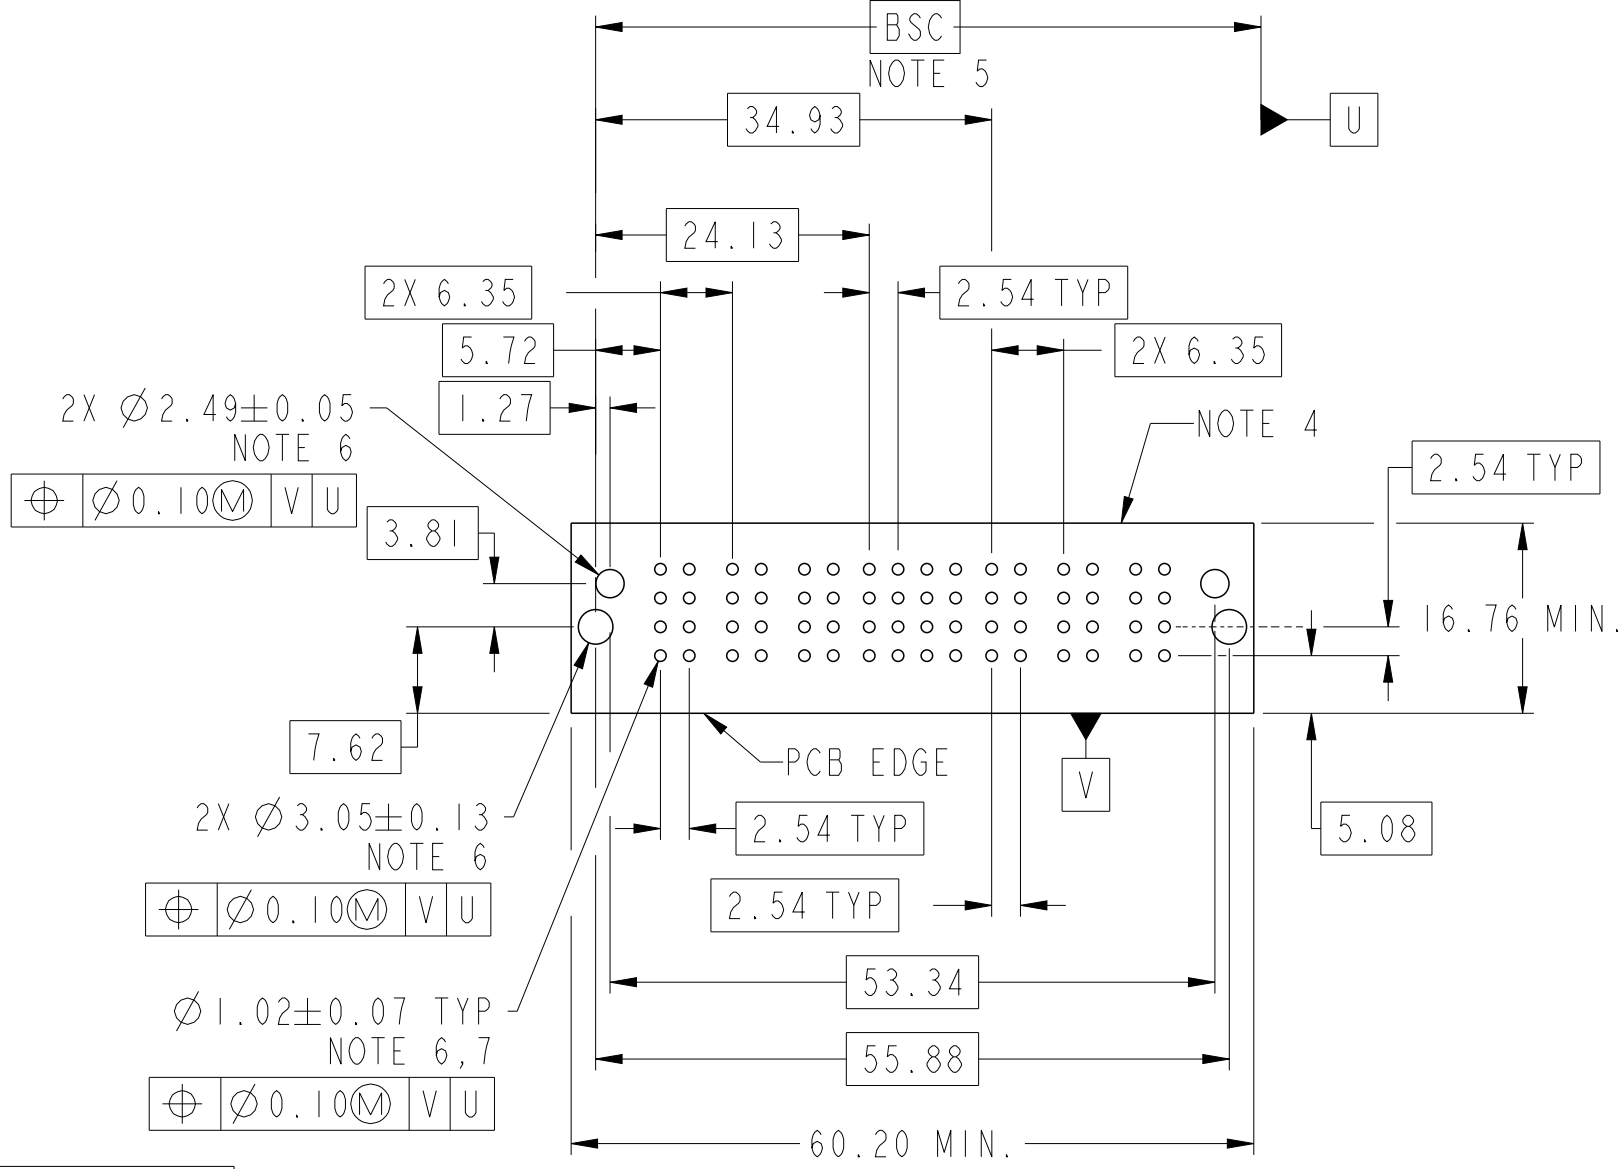

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
H1	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Eddy Zeng	2013/12/16	projection 	size	A3	scale	3:2
eng	Eddy Zeng	2014/01/02		ecn no	-		
chr	Li-He	2014/01/02		rel level	Released		
appr	Pei-Ming Zheng	2014/01/02	product family	PwrBlade+			
www.fci.com		cat. no.	3HP + 16S + 3HP RA STB HEADER		dwg no	10106124-6004001	rev A
Product - Customer Drw				sheet 2 of 3			

A

B

C

D

A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Eddy Zeng	2013/12/16	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale	
eng	Eddy Zeng	2014/01/02			A3	3:2	
chr	Li-He	2014/01/02			ecn no	-	
appr	Pei-Ming Zheng	2014/01/02	product family		PwrBlade+	rel level	Released
	title	3HP + 16S + 3HP			dwg no	rev	
		RA STB HEADER					
www.fci.com	cat. no.	Product - Customer Drw			sheet 3 of 3		
		10106124-6004001			A		