


CREE® ADHESIVE-BACKED LENS



FEATURES / BENEFITS

- ▲ For CREE XR & XR-E series LEDs
- ▲ Available in spot, diffuser, wide, and oval lenses
- ▲ Integral self-adhesive pad
- ▲ Snap-on sub-lens
- ▲ Greater than 85% efficiency

OPERATING CONDITIONS

- ▲ 85° C max acrylic temperature
- ▲ 105° C max adhesive temperature


MATERIALS/FINISH

- ▲ Optical grade PMMA acrylic

ORDERING INFORMATION

| BASE LENSES | | | |
|--------------------------------------|---------------|--|----------|
| Dialight P/N | Reference P/N | Description | Degree* |
| OPTX1006 | OPTX-1-006 | OPTX Series Spot Base Module For CREE | 6° |
| SUB-LENSES | | | |
| OPAA1DF | OPAA-1-DF | Diffuser Sub-Lens | 8° |
| OPAA1WSL | OPAA-1-WSL | Wide Sub-Lens | 18° |
| OPAA1OSL | OPAA-1-OSL | Oval Sub-Lens | 8° X 25° |
| *All angles refer to half divergence | | | |

MECHANICAL DIMENSIONS

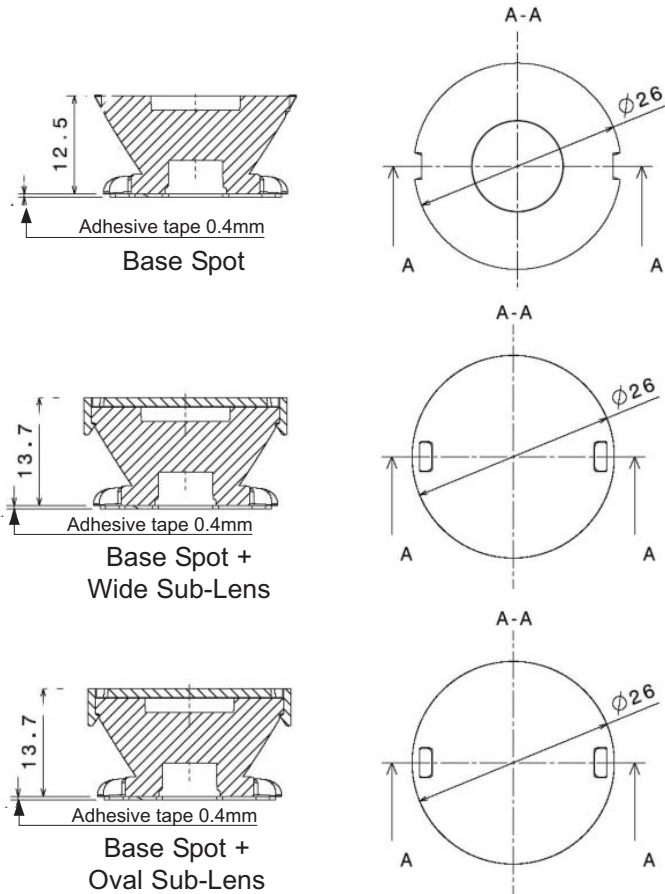

Dialight reserves the right to make changes at any time in order to supply the best product possible.
 The most current version of this document will always be available at:
www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MDEXLUMADBCREE.pdf