
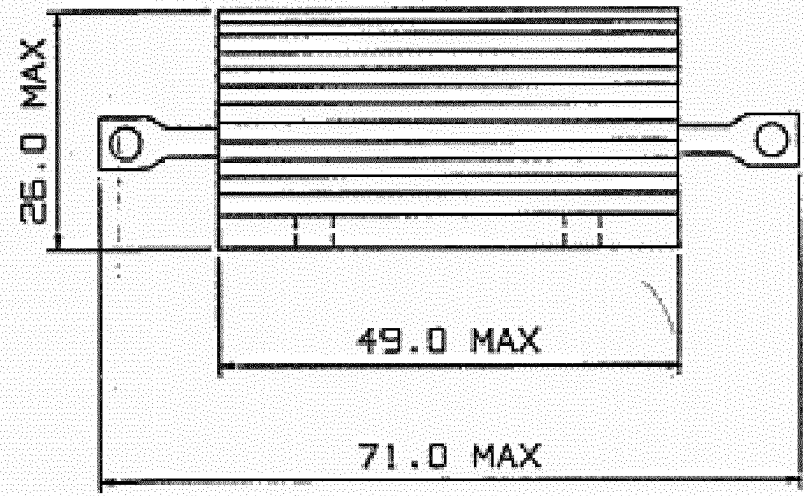
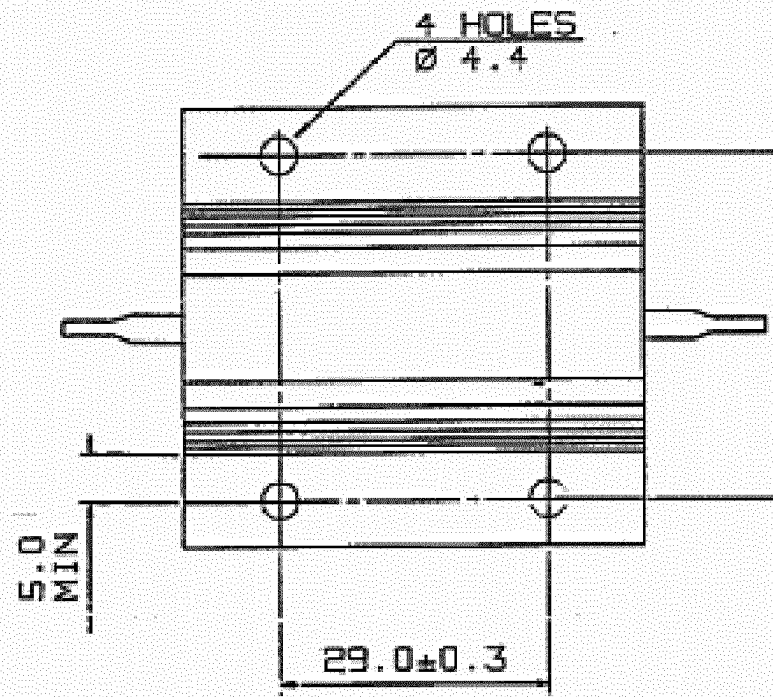


LOC E	DIST B	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-005150	21MAR11	RK	HMR


TECHNICAL SPECIFICATION

DISSIPATION AT 25°C 75 WATTS MOUNTED
OHMIC RANGE ON STD HEATSINK
R10 TO 50K
STABILITY ΔR <±2%
per 1000hrs
ISOLATION VOLTAGE 3500v DC/AC pk
MAX WORKING VOLTAGE 1400V DC/AC rms
TEMP COEFFICIENT >1R0 50ppm
>100R 25ppm
CLIMATIC CATEGORY 55/200/56

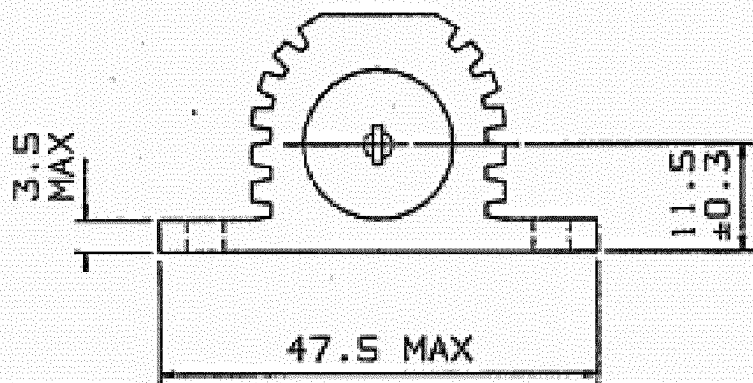

NOTE:
1) FOR A SPECIFIC PN FOR A RESISTANCE VALUE
AND TOLERANCE, PLEASE REFER TO DMF.

RoHS Compliant

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN PRAKASH KANNIAH 03JUN08	 TE Connectivity					
		CHK R BLANCH 03JUN08						
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J CATCHPOLE 03JUN08	NAME THS75 METAL CLAD RESISTOR —				
	0 PLC ± —		PRODUCT SPEC	SIZE A3 CAGE CODE 00779 DRAWING NO C-1879363 RESTRICTED TO —				
	1 PLC ± —		—					
	2 PLC ± —		APPLICATION SPEC					
	3 PLC ± —		—					
	4 PLC ± —		—					
ANGLES ± —		WEIGHT —						
MATERIAL —	FINISH —		CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV A1