



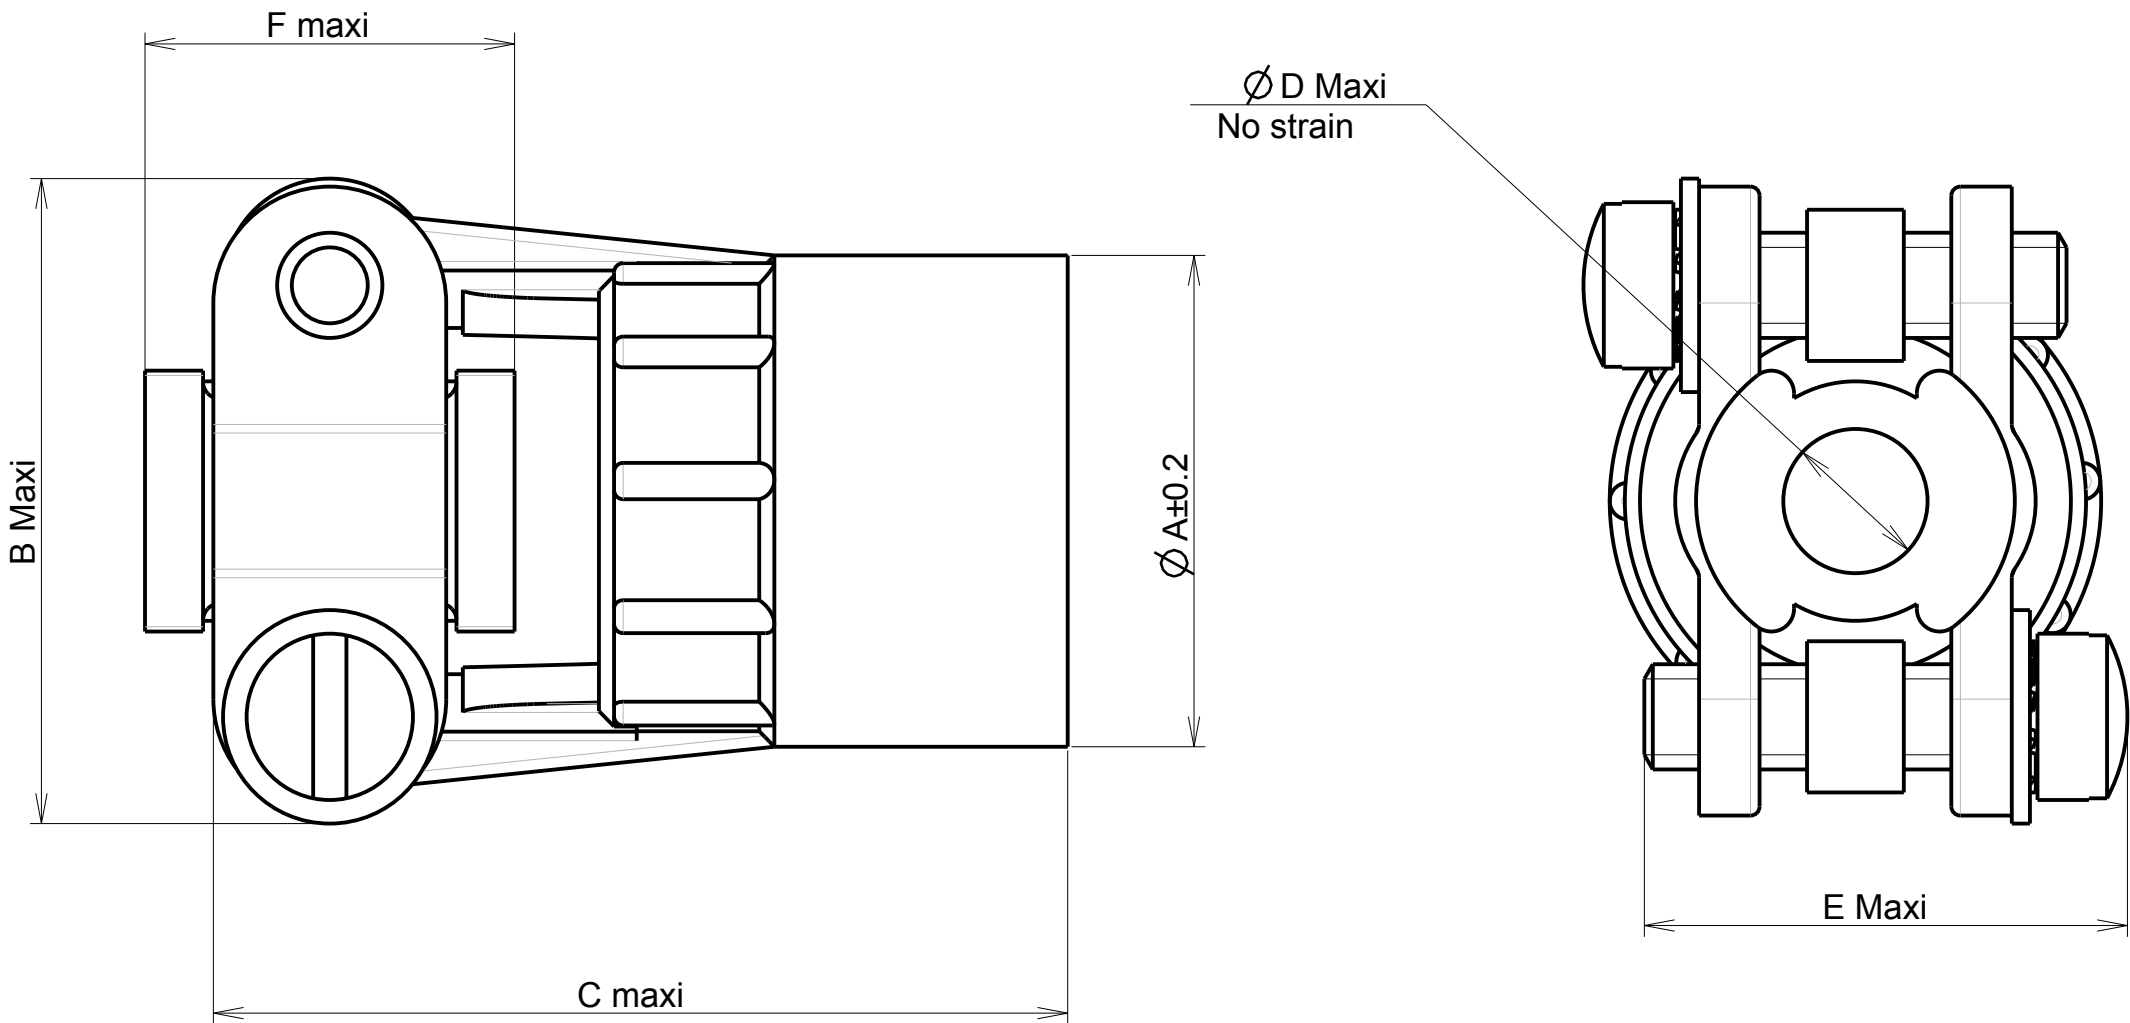

Item	Qty	Designation	Material
1	1	Backshell body	Al Alloy, Ni plated
2	2	Clamping plate	Al Alloy, Ni plated
3	1	Boot	Elastomer
4	2	Screw	Brass, Ni plated
5	2	Washer	Brass, Ni plated


Performance Characteristics :

Operating temperature : -40°C up to 105°C
Corrosion salt spray : 48 hours

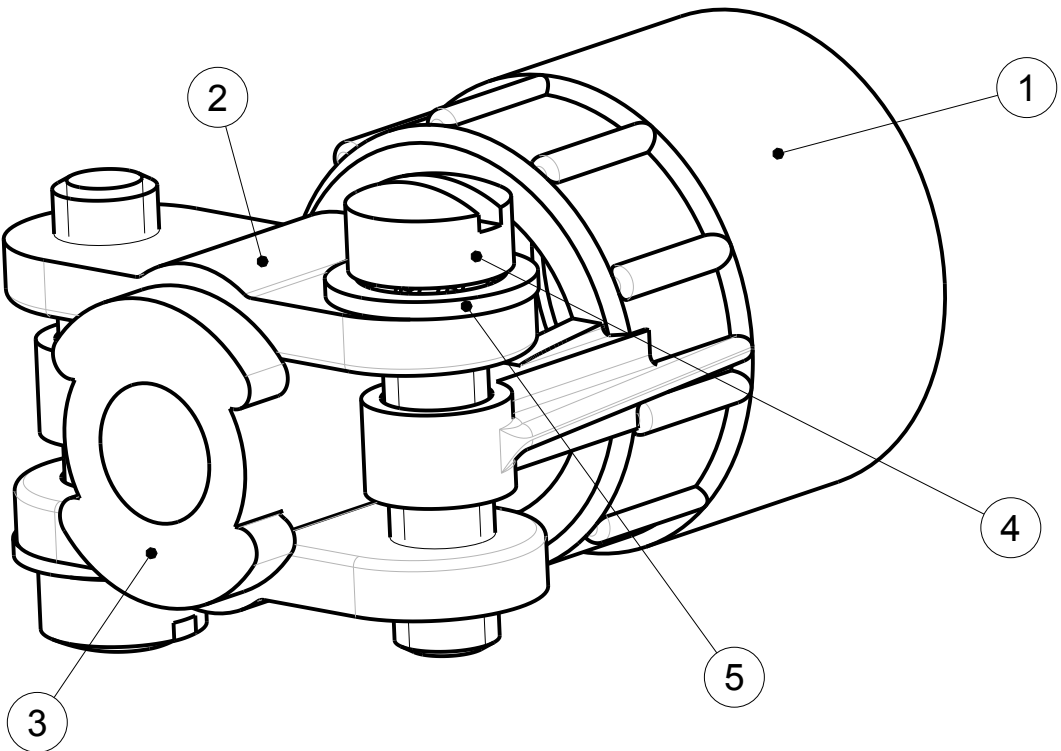

P/N : See table

Size	Part Number	Ø A	B maxi	C maxi	WEIGHT(g) (For information)	Capacity Ø D Maxi	E maxi	F maxi
10	UTO10AC	16.30	21.60	28.90	8.25	5.00	16.70	12.30
12	UTO12AC	19.50	25.00	28.90	9	8.20	16.70	12.30
14	UTO14AC	22.70	27.40	28.90	12.5	10.00	20.80	12.30
16	UTO16AC	25.90	29.40	32.00	12	13.00	20.80	12.30
18	UTO18AC	29.30	35.20	31.50	16.5	16.10	24.20	13.60
20	UTO20AC	32.60	35.20	28.50	16	16.10	24.20	13.60
22	UTO22AC	35.80	41.10	28.50	20	19.30	29.20	13.60
24	UTO24AC	38.90	42.40	28.50	21	20.60	29.20	13.60

d		05/11/13		remove drawing, add column "E maxi", "F maxi" and material definition		—			
ISS		DATE		Latest modification - by: LANDAIS.P			MOD N°		
Designed by:		C. PROVOST			Date:01/09/03		CUSTOMER DRAWING		
TITLE		STRAIGHT CABLE CLAMP UTO CONNECTOR							
Scale ~127/30				General linear Tolerances: ± --		NPRDS / PROJECT UTO			
SOURIAU		WWW.SOURIAU.COM				This document is the property of SOURIAU It must not be reproduced or communicated without permission			
FORMAT A2		SOURIAU DRG N° UTOXXAC-C01					SHEET 1 / 1		