


d : 1 : RL

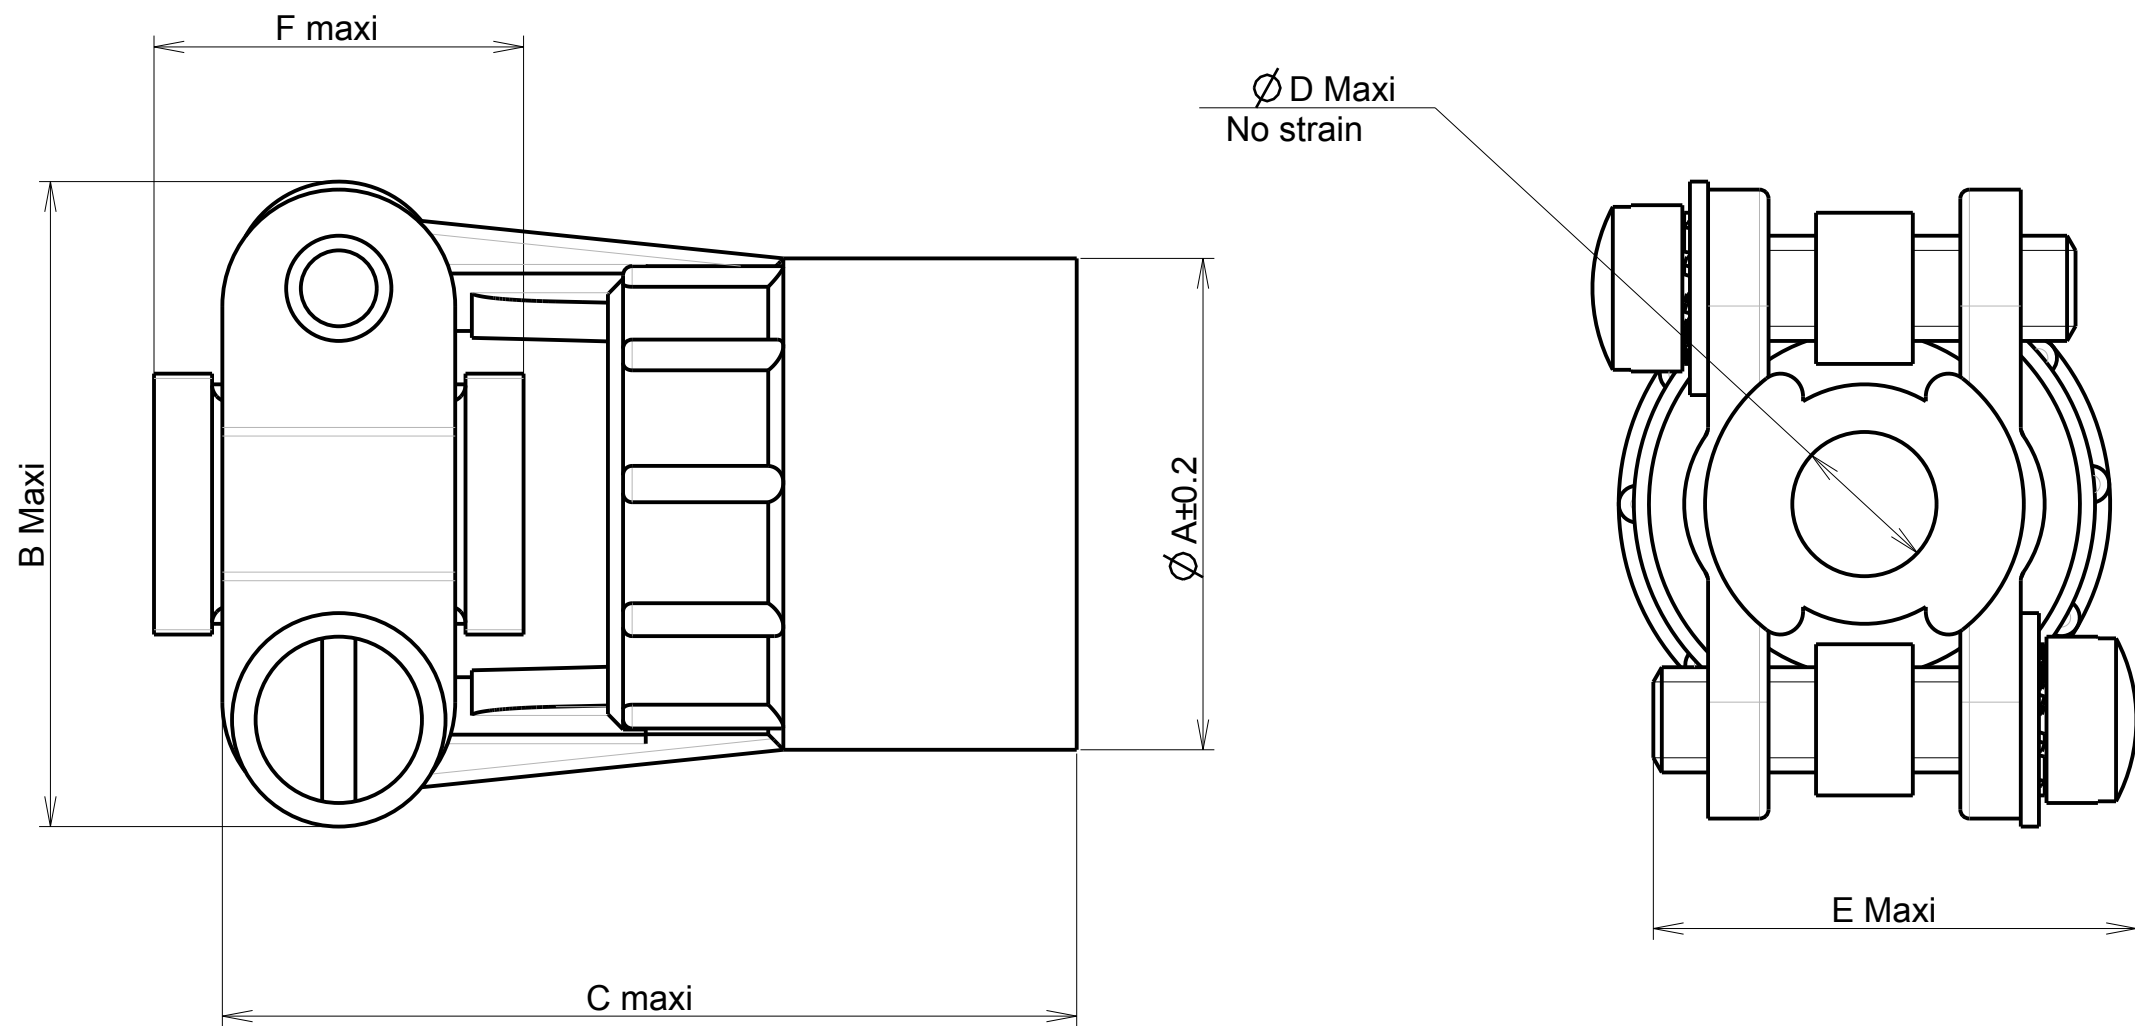


Size	Part Number	Ø A	B maxi	C maxi	WEIGHT(g) (For information)	Capacity Ø D Maxi	E maxi	F maxi
10	UTO10AC	16.30	21.60	28.90	8.25	5.00	16.70	12.30
12	UTO12AC	19.50	25.00	28.90	9	8.20	16.70	12.30
14	UTO14AC	22.70	27.40	28.90	12.5	10.00	20.80	12.30
16	UTO16AC	25.90	29.40	32.00	12	13.00	20.80	12.30
18	UTO18AC	29.30	35.20	31.50	16.5	16.10	24.20	13.60
20	UTO20AC	32.60	35.20	28.50	16	16.10	24.20	13.60
22	UTO22AC	35.80	41.10	28.50	20	19.30	29.20	13.60
24	UTO24AC	38.90	42.40	28.50	21	20.60	29.20	13.60

Item	Qty	Designation	Material
1	1	Backshell body	Al Alloy, Ni plated
2	2	Clamping plate	Al Alloy, Ni plated
3	1	Boot	Elastomer
4	2	Screw	Brass, Ni plated
5	2	Washer	Brass, Ni plated

Performance Characteristics :

Operating temperature : -40°C up to 105°C
Corrosion salt spray : 48 hours

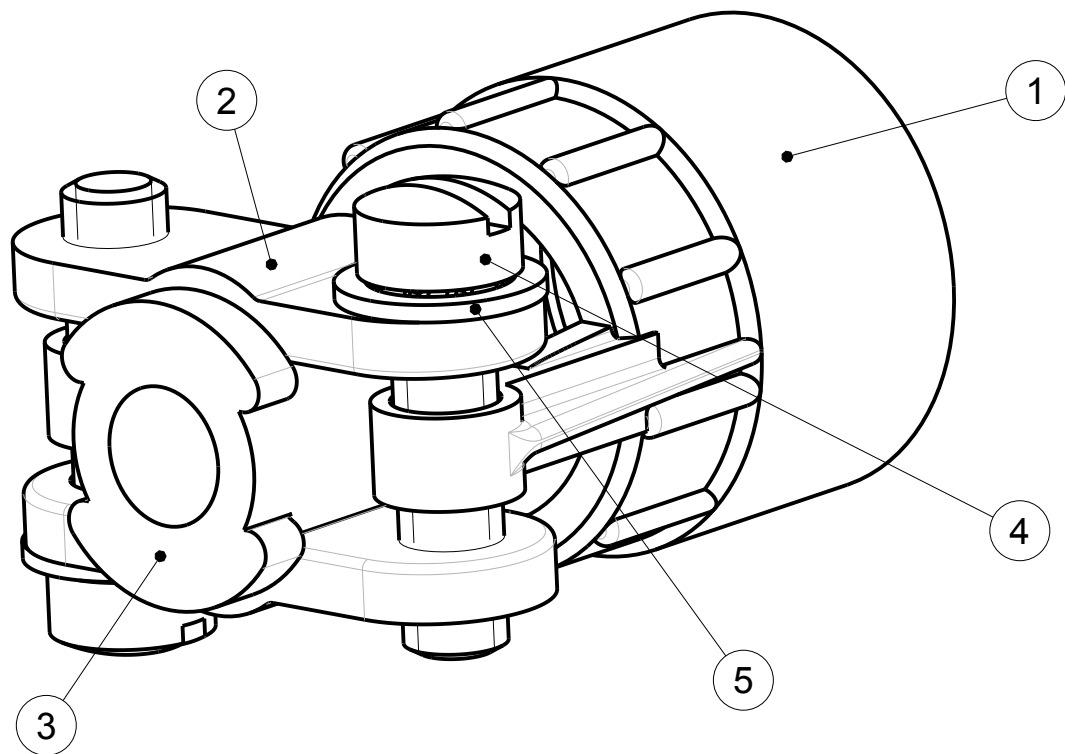

P/N : See table

d		05/11/13		remove drawing, add column "E maxi","F maxi" and material definition		—			
ISS		DATE		Latest modification - by:		LANDAIS.P		MOD N°	
Designed by:		C. PROVOST		Date:01/09/03		CUSTOMER DRAWING			
TITLE		STRAIGHT CABLE CLAMP UTO CONNECTOR							
Scale				General linear Tolerances:		NPRDS / PROJECT UTO			
~127/30				± --					
SOURIAU		WWW.SOURIAU.COM				This document is the property of SOURIAU It must not be reproduced or communicated without permission			
FORMAT		SOURIAU DRG N° UTOXXAC-C01						SHEET	
A2								1 / 1	