


PROJECT NO.:		REVISIONS				
PRJ-14-000000805		ÄNDERUNGEN	DESCRIPTION	DATE	DWN	APVD
P	LYR	DESCRIPTION CORRECTED FROM SOLDER TO SCREW TERMINAL IN TITLE BLOCK				
	A2				13NOV2014	CR JK

- 1 MATERIAL: ITEM NO. 1: HOUSING - PA
ITEM NO. 2: CONTACT BODY - PA
ITEM NO. 3: CONTACT - CuZn (brass)
- 2 CONTACT FINISH - CuSnZn (Optalloy)
- 3 ALL DIMENSIONS ARE FOR NOMINAL REFERENCE ONLY UNLESS OTHERWISE STATED
- 4 MEASUREMENT REFERENCE ONLY
- 5 PACKAGING: 1 PIECE IN A BAG

TECHNICAL DATA	3-2271112-1	3-2271112-2	4-2271112-1	4-2271112-2
RATED VOLTAGE	250V	250V	125V	125V
RATED IMPULSE VOLTAGE	2500V	2500V	1500V	1500V
POLLUTION DEGREE	3	3	3	3
OVERVOLTAGE CATEGORY	II	II	II	II
MATERIAL GROUP	III	III	III	III
RATED CURRENT	4A	4A	4A	4A
VOLUME RESISTIVITY	≤ 8mΩ	≤ 8mΩ	≤ 8mΩ	≤ 8mΩ
DEGREE OF PROTECTION	IP67	IP67	IP67	IP67
UPPER TEMPERATURE	+85 °C	+85 °C	+85 °C	+85 °C
LOWER TEMPERATURE	-40 °C	-40 °C	-40 °C	-40 °C

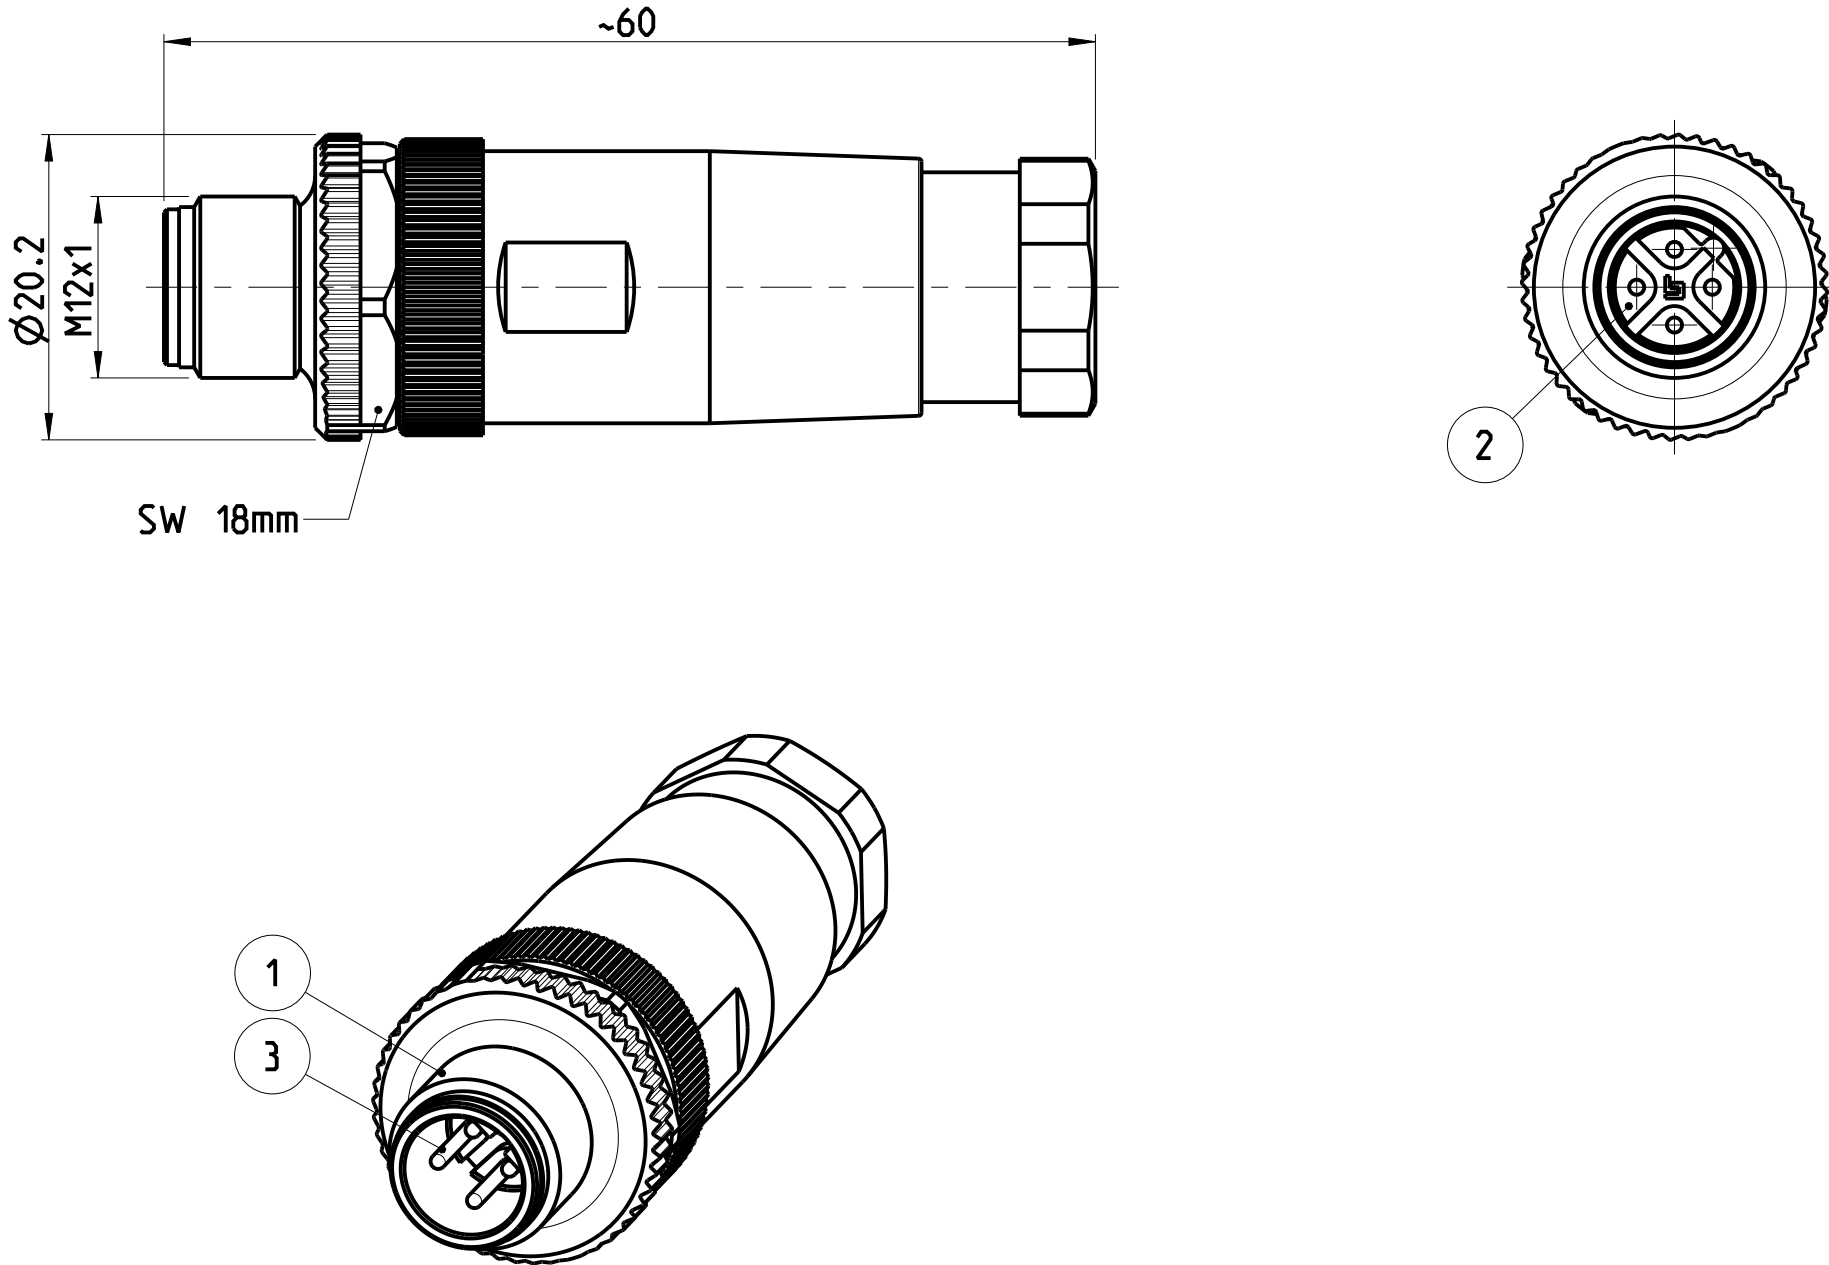

3-2 AS SHOWN
WIE GEZEICHNET

PIN ARRANGEMENT
B-CODING (SCALE 2:1)

3-2271112-1	3-2271112-2	4-2271112-1	4-2271112-2

6-8	18 / 0.75mm ²	1 2	5	4-2271112-2
4-6	18 / 0.75mm ²	1 2	5	4-2271112-1
6-8	18 / 0.75mm ²	1 2	4	3-2271112-2
4-6	18 / 0.75mm ²	1 2	4	3-2271112-1
CABLE FEED-THROUGH mm	WIRES AWG / mm ²	MATERIAL	NUMBER OF POLES	TE-PART-NO.

DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMAESS GPS (ISO STANDARDS).		DWN YASHKUMAR 28APR2014 CHK M.STRELOW 28APR2014 APVD C.SCHREITLINGER 28APR2014		NAME M12 MALE, STRAIGHT, FIELD INSTALLABLE. UNSHIELDED CONNECTOR. SCREW TERMINALS, B-CODING	
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		PRODUCT SPEC PRODUKTSPEZ.		SIZE A2	CAGE CODE 00779
DIMENSIONS: MASSEINHEIT: ITMM	TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN	APPLICATION SPEC VERARBEITUNGSSPEZ.		DRAWING NO. ZEICHNUNGS-NR.	RESTRICTED TO NUR FÜR
MATERIAL	FINISH/OBERFLÄCHE/FARBE	WEIGHT GEWICHT		SCALE MASSSTAB	SHEET BLATT
-	-	-		2:1	1 OF 1
Customer Drawing		/KUNDENZEICHNUNG		REV A2	