
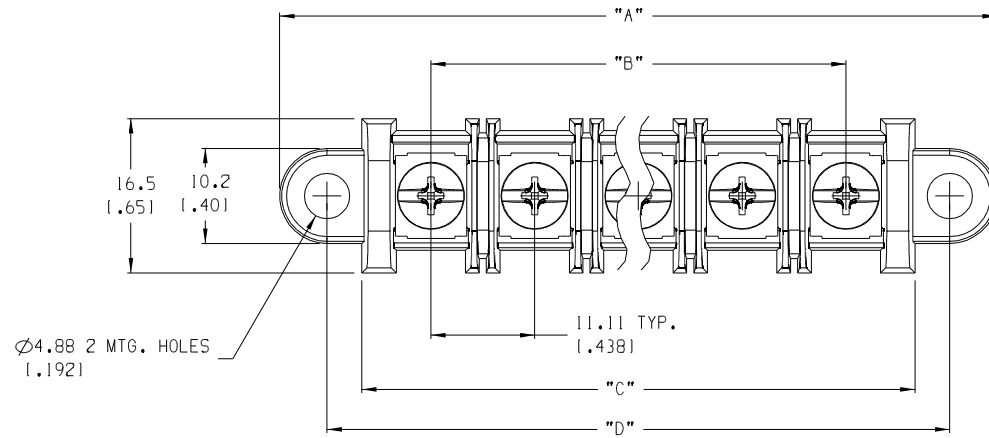

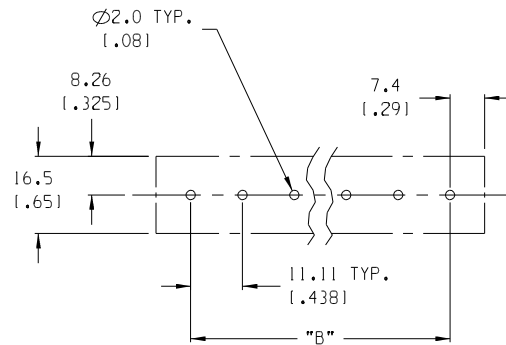



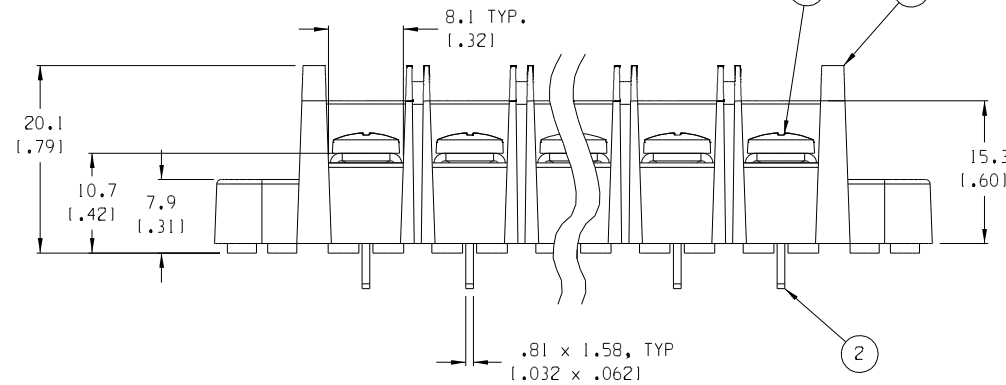

4 REF. -50 OPTION

AUX. VIEW
SCALE 1:1

5 CIRCUIT SHOWN

RECOMMENDED PTH PATTERN
SCALE 1:1

NOTES:

1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. PRODUCT SPECIFICATION: NOT REQUIRED
4. PACKAGING: NOT REQUIRED
5. MATES WITH: NONE
6. "XX" REFERS TO QTY. OF CIRCUITS

4	XX	SCREW, #6-32, PHIL-SLOT, W/SO. WASHER	STEEL	ZN, CLEAR CHROMATE
3	XX	SCREW, #6-32, PHIL-SLOT	STEEL	ZN, CLEAR CHROMATE
2	XX	TERMINAL, PC STYLE	BRASS	TIN PLATED
1	1	INSULATOR	THERMOPLASTIC	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

EC NO. A	RELEASED CLY	DESCRIPTION REV	QUALITY SYMBOLS MAJOR CRITICAL SPEC	GENERAL TOLERANCES: (UNLESS SPECIFIED)	SCALE 2:1	DESIGN UNITS ☐ mm ☒ INCH	THIRD ANGLE PROJECTION	PROJECT NO. -		
								DIMENSIONS:		
								☒ mm ☐ INCH	☐ mm ☐ INCH	☐ mm ☐ INCH
								SHT REV		
								REVISE ON CAD ONLY		
								DRAWN BY & DATE C. YORK 08-16-04		
								CHECKED BY & DATE		
								APPROVED BY & DATE		
								CAD FILENAME 63R5XX		
								MATERIAL NO. SEE SHT. 2		
								DRAWING NO. SD-38634-002		
								SHEET NO. 1 OF 2		
								SIZE B		

DRAFT WHERE APPLICABLE MUST
REMAIN WITHIN DIMENSIONSTHIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.SR BTS, CLOSED SIDE,
600V, ASSEMBLY

MOLEX INCORPORATED

