

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	A1	REVISED PER ECO-15-001494	03FEB2015	AP	DD






1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.

2 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN
ON PCB TAILS, NICKEL OVERALL.
3. SCREWS PACKAGED IN END OF PACKAGING TUBE.

4 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH,
Ø3.66 DRILL, AND Ø6.5 PAD.

5. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART
ON SHEET 2 FOR OTHER POSITIONS.

NOTCH DESIGNATES
ROW A

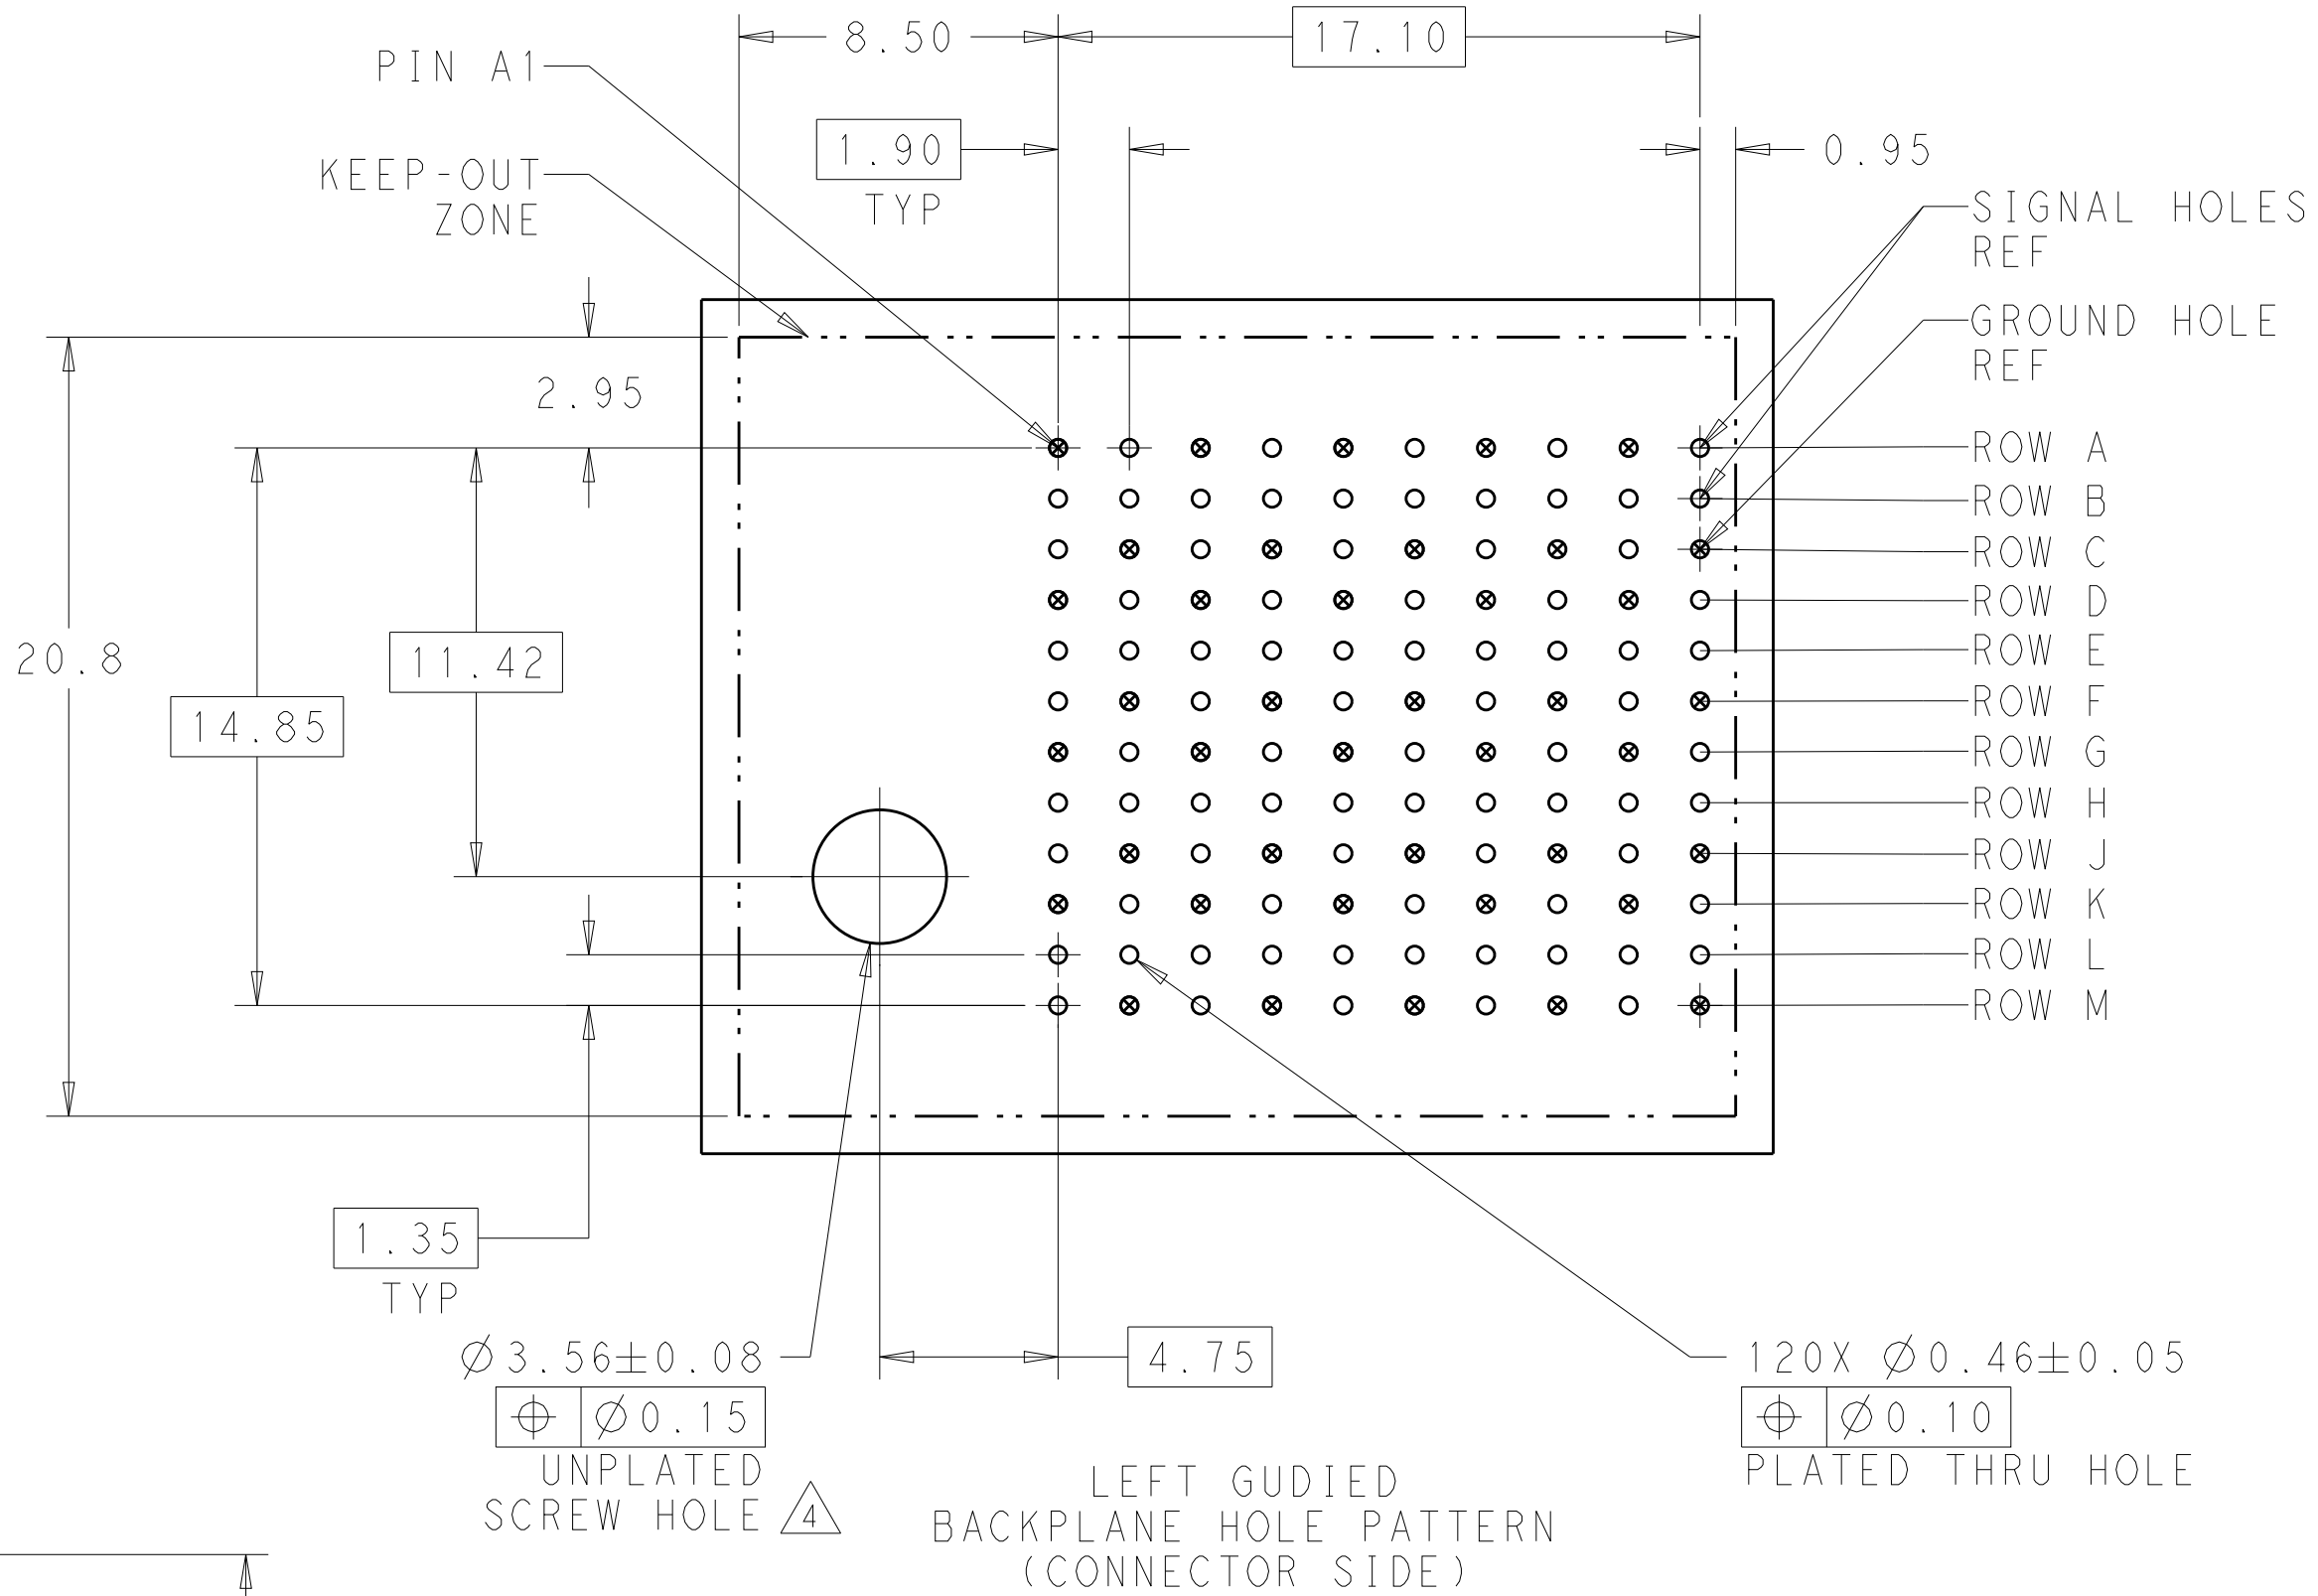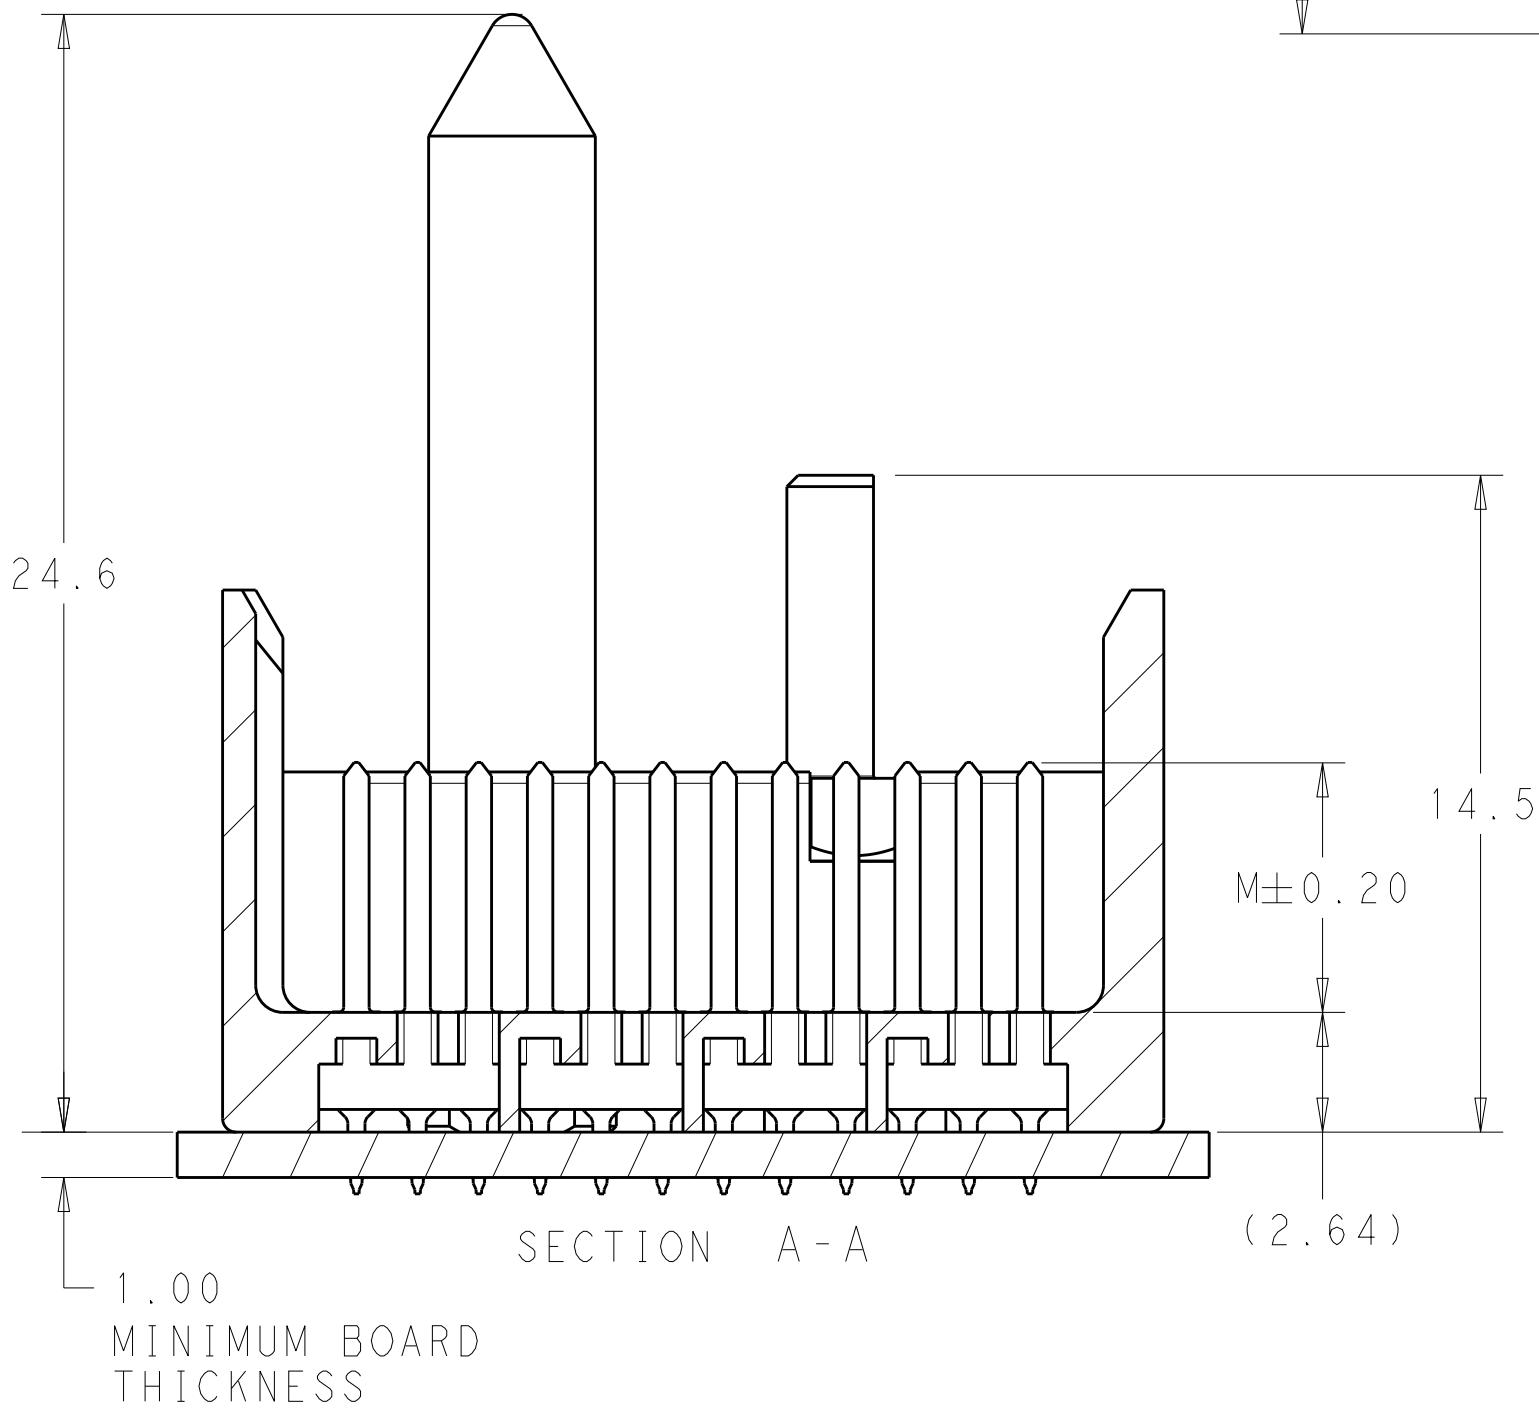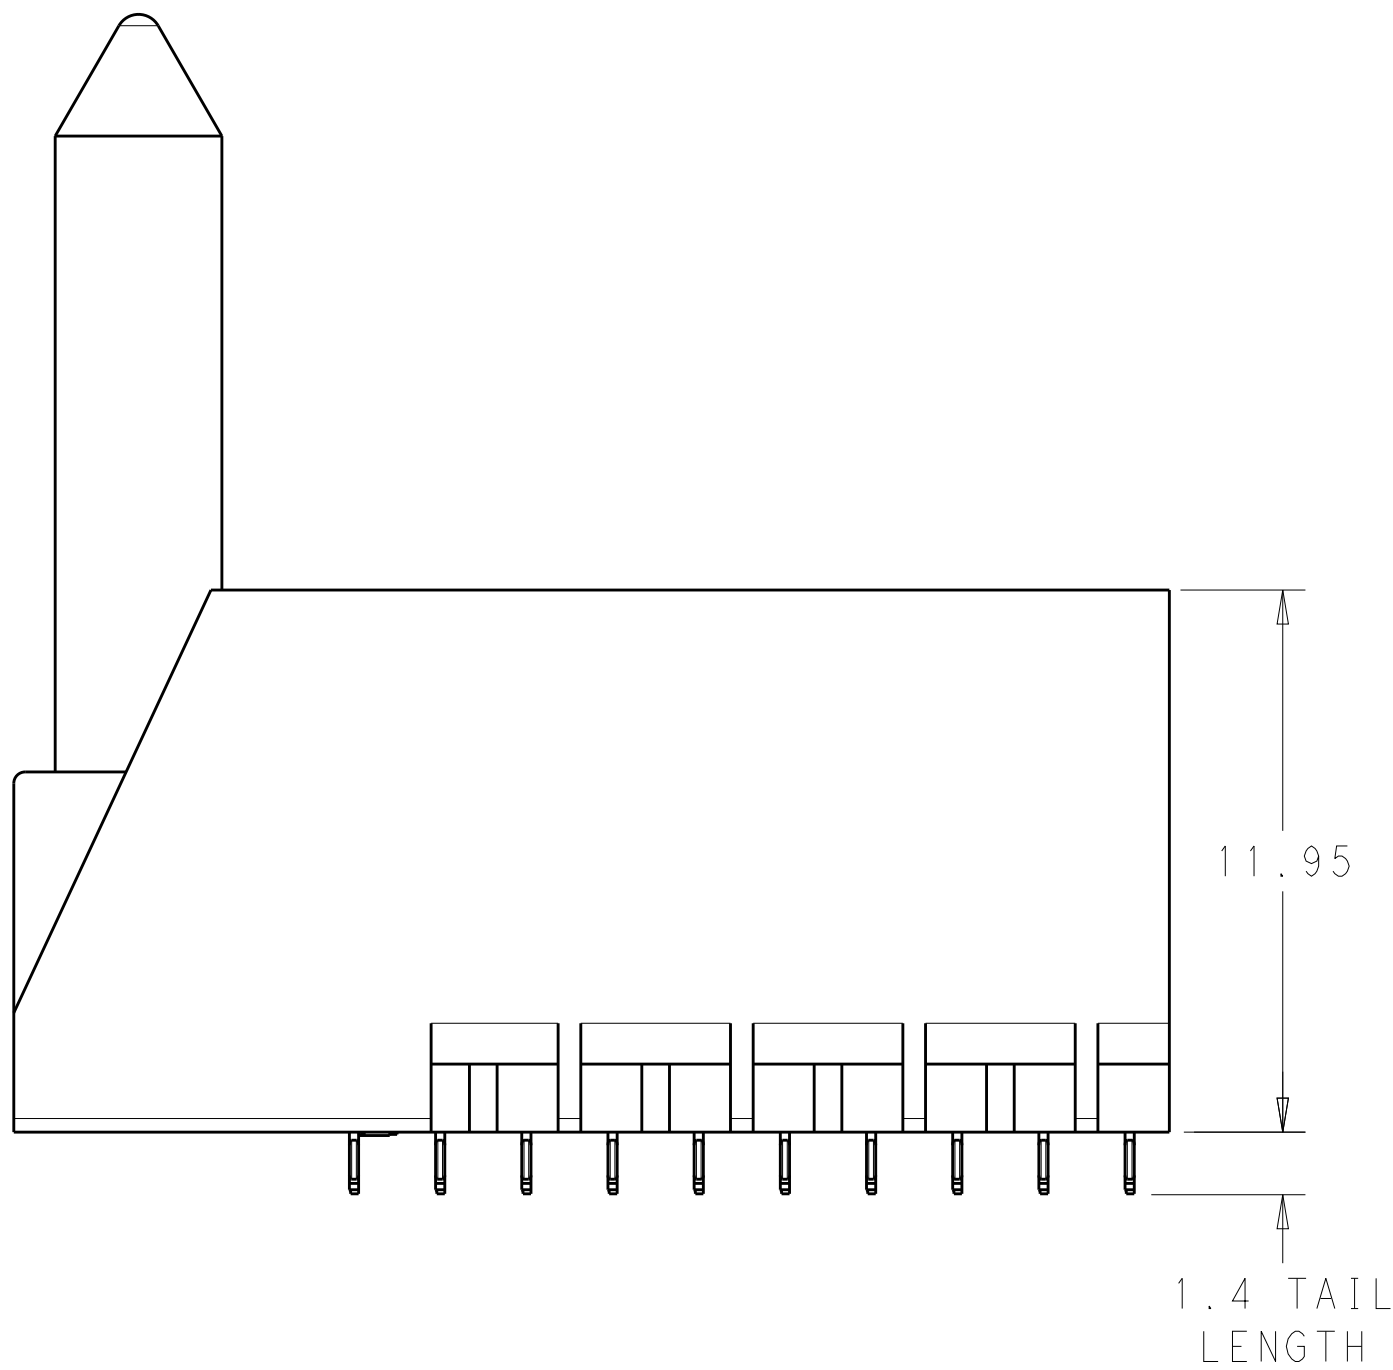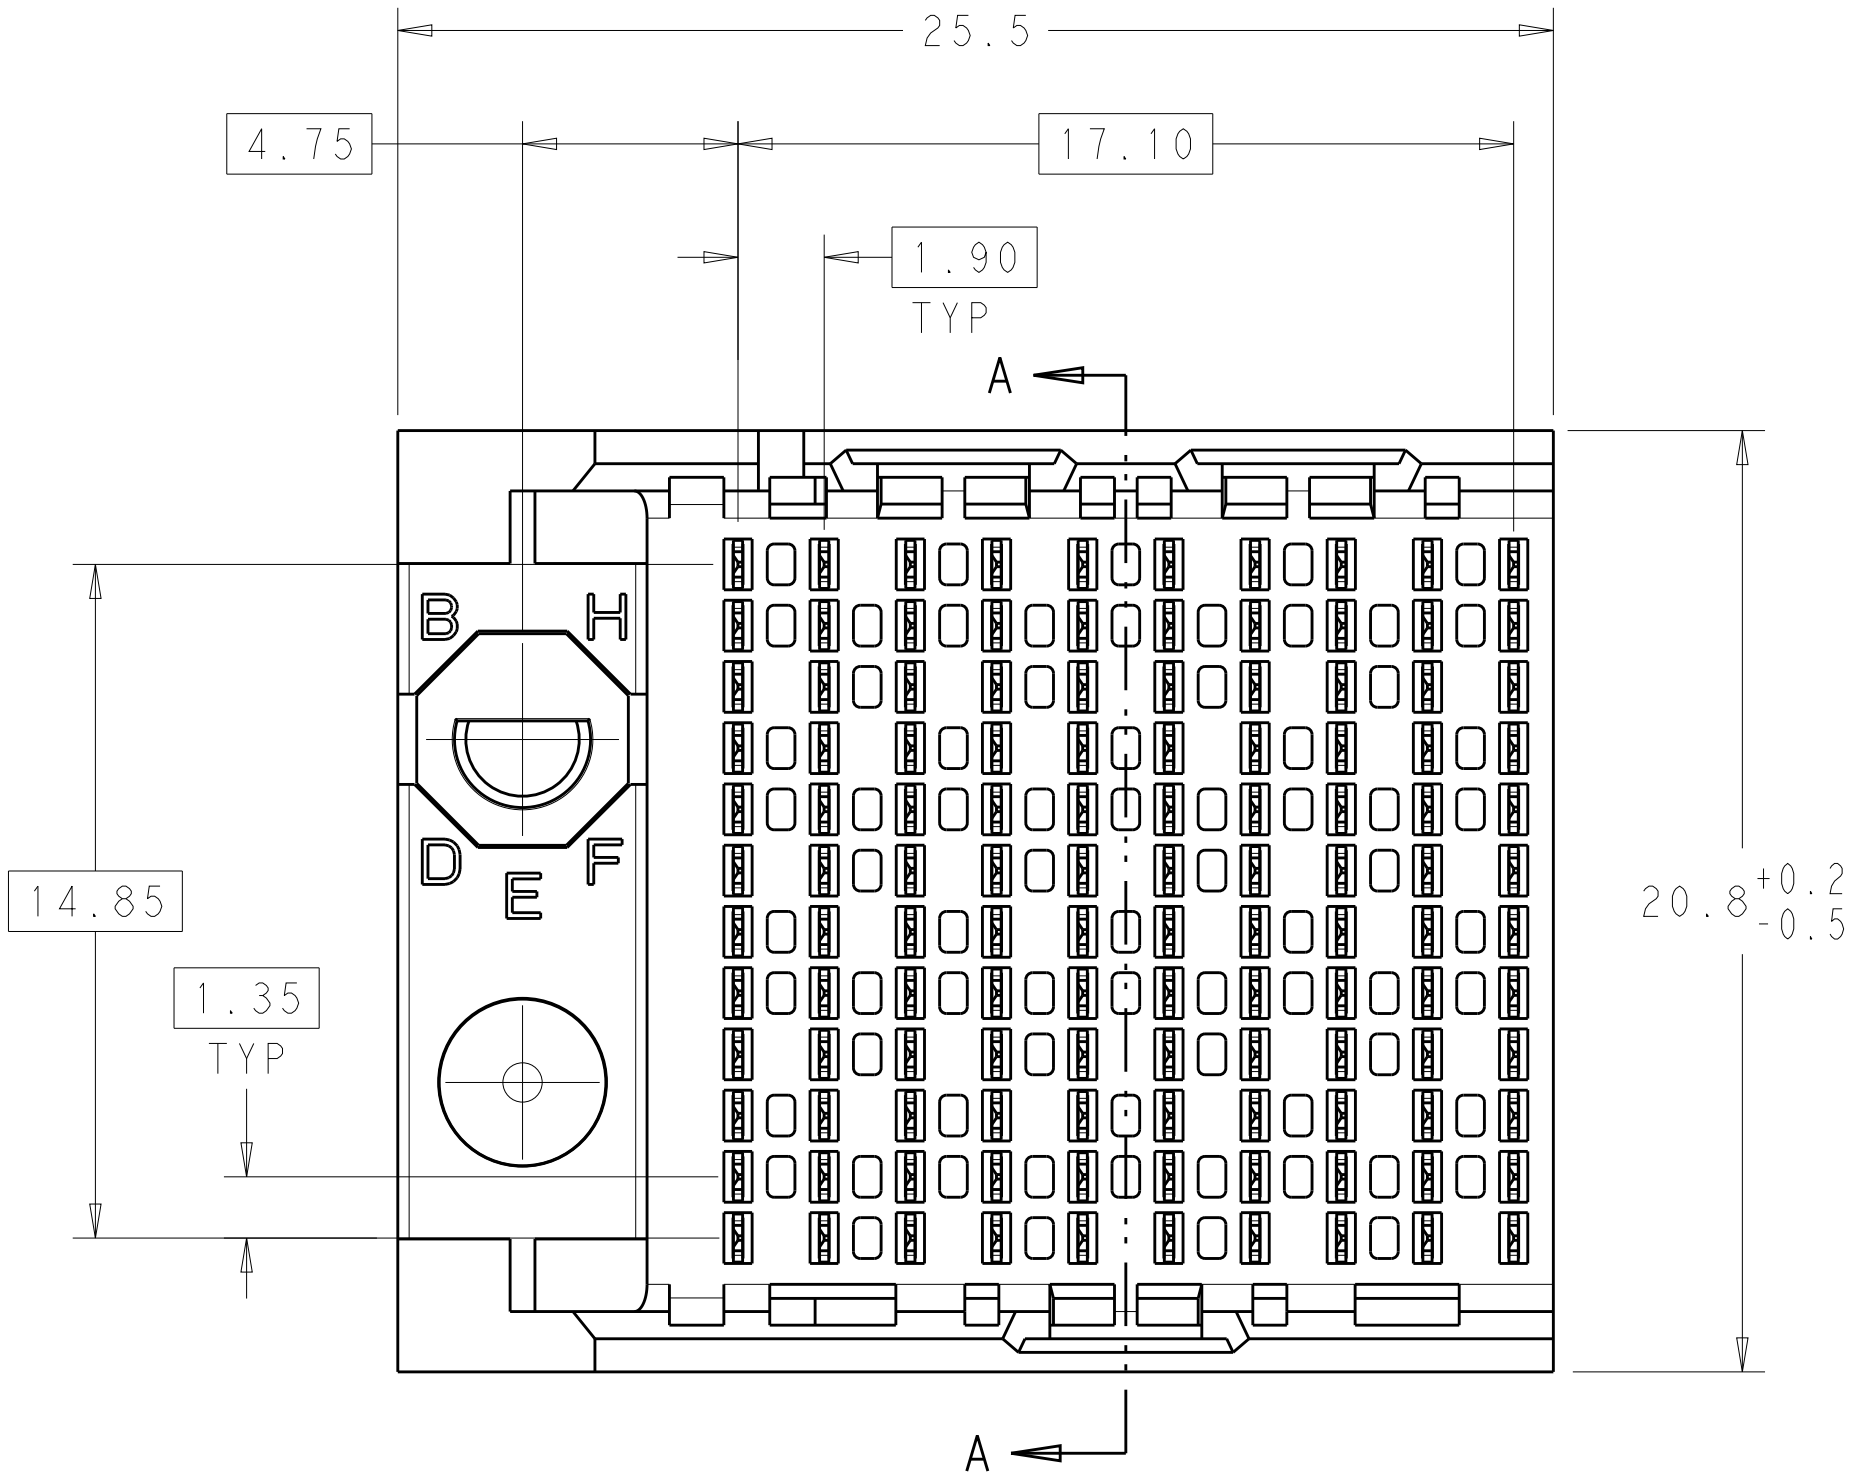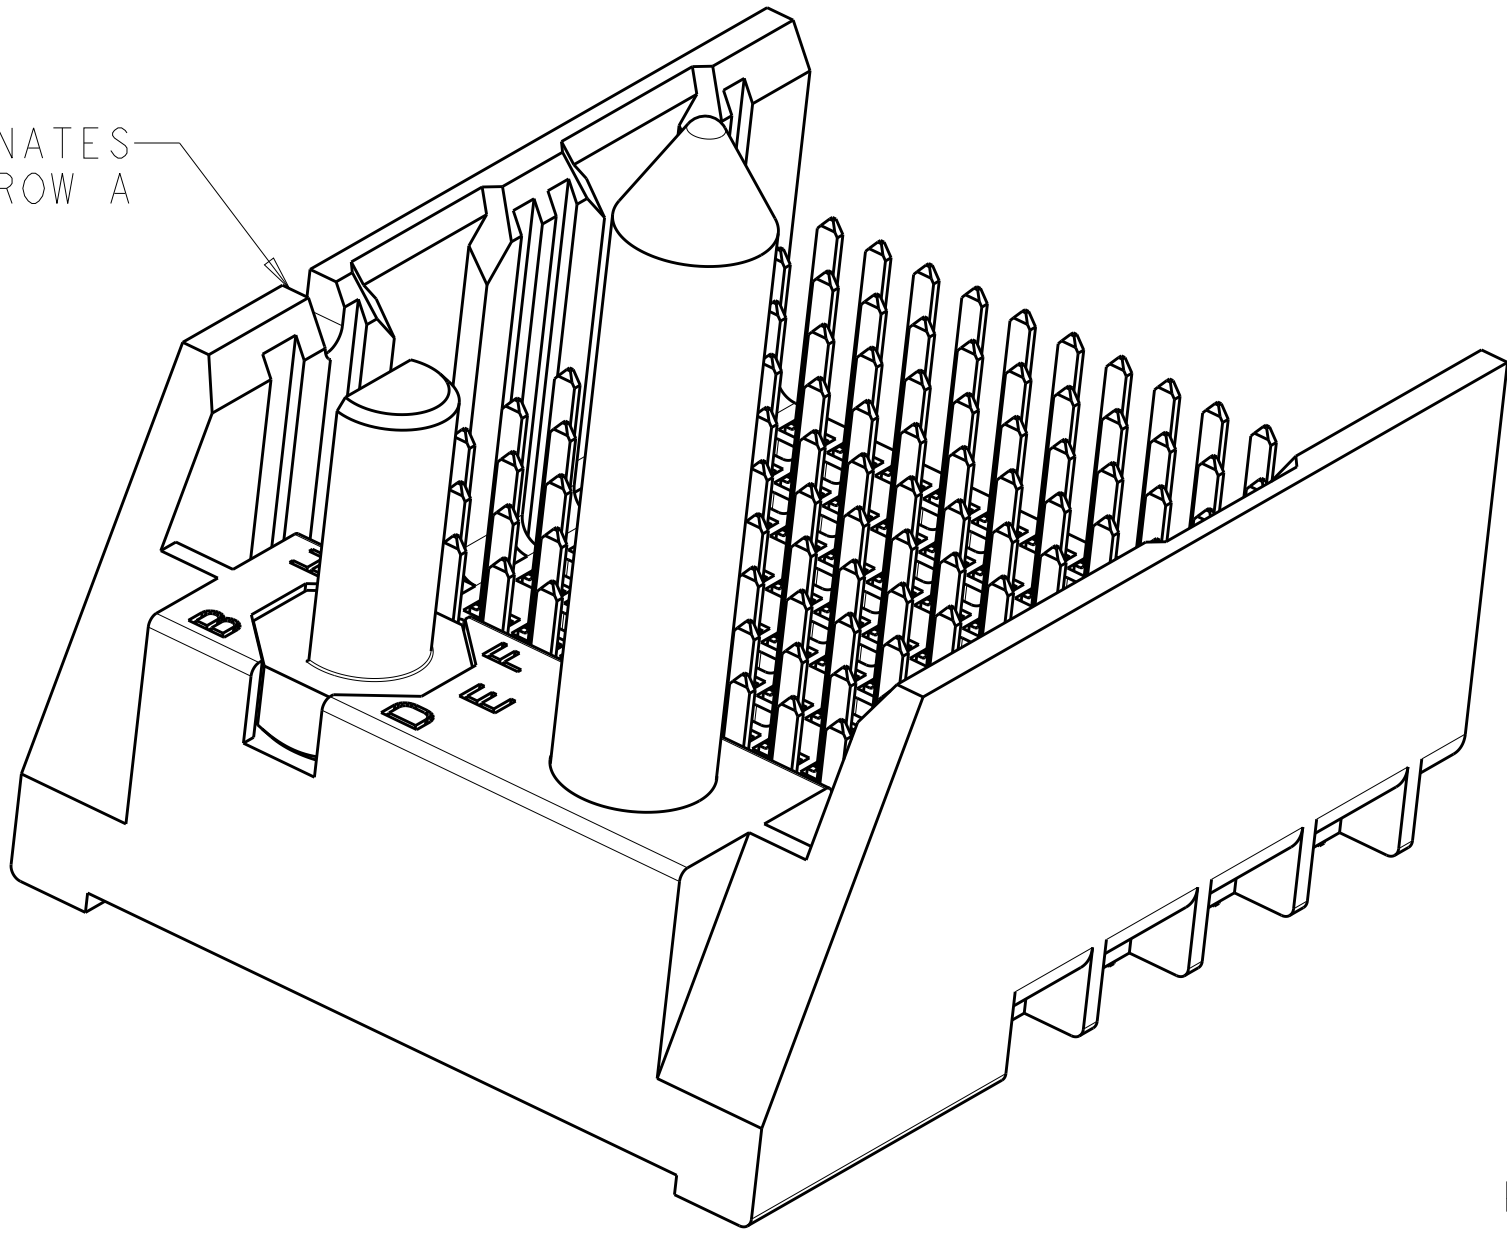


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. K. SHOBER 22DEC2010	TE Connectivity	
DIMENSIONS:		CHK J. EABY 22DEC2010		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. EABY 22DEC2010	NAME	IMPACT, 4 PAIR, 10 COLUMN, HEADER
	0 PLC ± 1 PLC ±0.25 2 PLC ±0.13 3 PLC ± 4 PLC ±	PRODUCT SPEC		LEFT GUIDED, OPEN END WALL
	ANGLES ±	APPLICATION SPEC		SIGNAL MODULE, 0.46 PTH
MATERIAL	FINISH SEE TABLE	WEIGHT	SIZE CAGE CODE DRAWING NO	RESTRICTED TO
	-	-	A100779C=2007808	-
CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 2	REV A1

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
	-	SEE SHEET 1	-	-	-


	H	5.5	8-2007808-3
	H	4.9	8-2007808-2
	H	4.5	8-2007808-1
	G	5.5	7-2007808-3
	G	4.9	7-2007808-2
	G	4.5	7-2007808-1
	F	5.5	6-2007808-3
	F	4.9	6-2007808-2
	F	4.5	6-2007808-1
	E	5.5	5-2007808-3
	E	4.9	5-2007808-2
	E	4.5	5-2007808-1
	D	5.5	4-2007808-3
	D	4.9	4-2007808-2
	D	4.5	4-2007808-1
	C	5.5	3-2007808-3
	C	4.9	3-2007808-2
	C	4.5	3-2007808-1
	B	5.5	2-2007808-3
	B	4.9	2-2007808-2
	B	4.5	2-2007808-1
	A	5.5	1-2007808-3
	A	4.9	1-2007808-2
	A	4.5	1-2007808-1
	-	5.5	2007808-3
	-	4.9	2007808-2
	-	4.5	2007808-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY


KEY POSITION
CHART




NONE




A




E




B




F




C



G



D



H