



DIMENSIONS mm (inches)

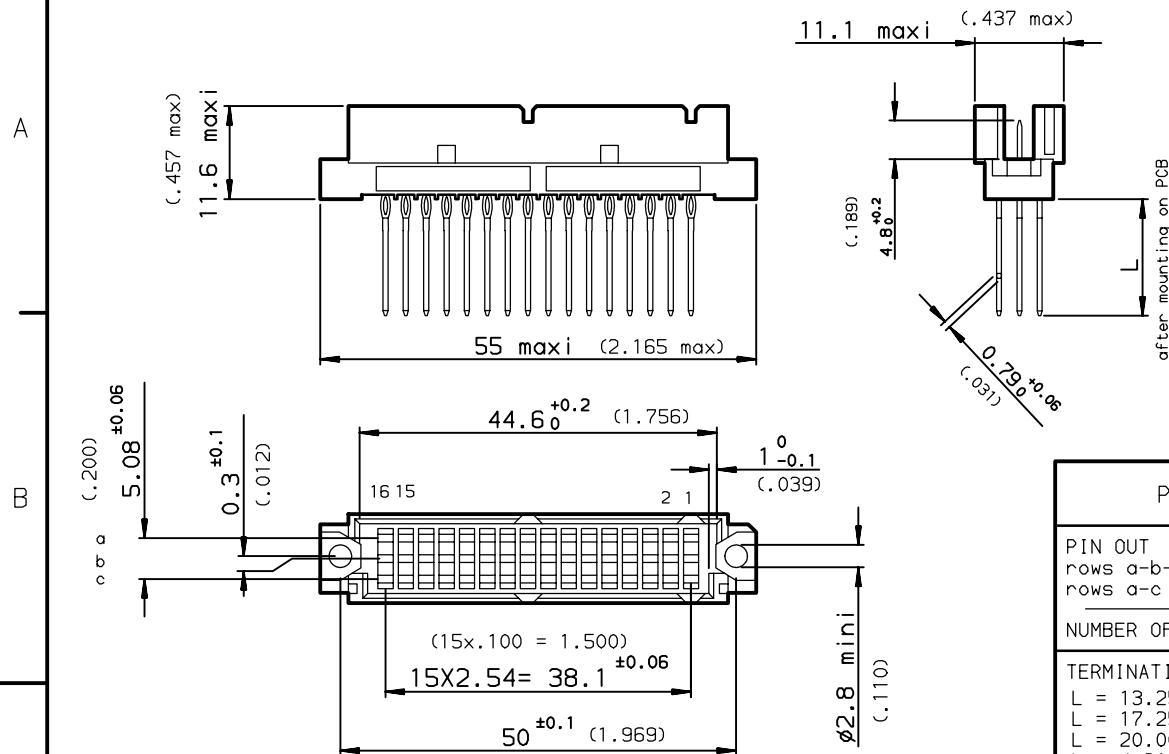

PCB DRILLING

component side

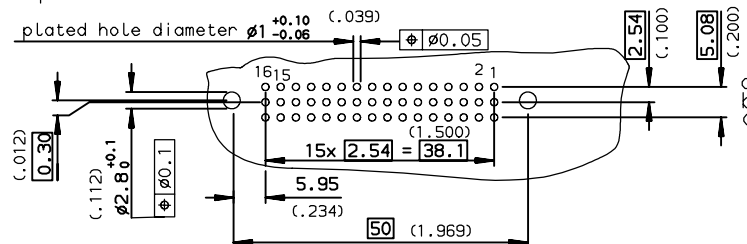

PART NUMBER		8609		76		7		5	
PIN OUT		rows a-b-c		3		48			
		rows a-c		4		32			
NUMBER OF CONTACTS									
TERMINATION									
L = 13.25 ±0.25 (.521)				1 wrap				91	
L = 17.25 ±0.25 (.679)				2 wraps				92	
L = 20.00 ±0.25 (.787)				3 wraps				93	
L = 4.20 ±0.25 (.165)				short post				94	
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD								000E1	
LEAD FREE								E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000C

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1992/07/07	ANGULAR	LINEAR	0.X	±0.1	size A3
Eng	TARON	1992/07/07	0.XX	±0.1	0.XX	±0.1	Scale 1.5
Chr	LEGARE	1992/07/07	0.XX' ±2'	0.XXX	±0.1	ECN	L506-0095
Appr	LEGARE	1992/07/07	Product family		DIN 8609		Spec ref -
FCI		title STRAIGHT MALE - STYLE R/2		drg no C-8609-0282		Rev. G	
catalog no				CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
E	-	ROU	1999/04/22
F	L505-004	JTA	2005/02/25
G	L506-0095	LGO	2006/06/15
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

PDM: Rev:G

STATUS: Released

Printed: May 14, 2011