


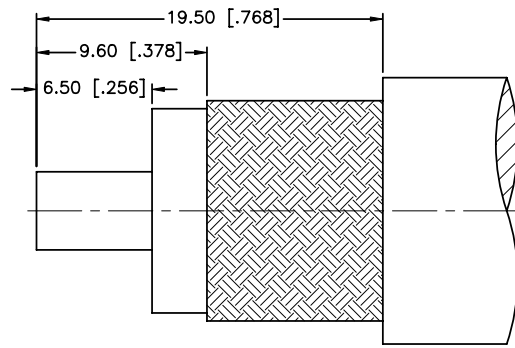
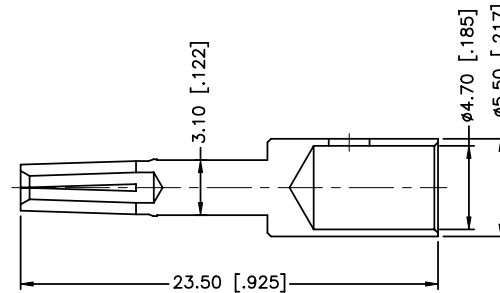


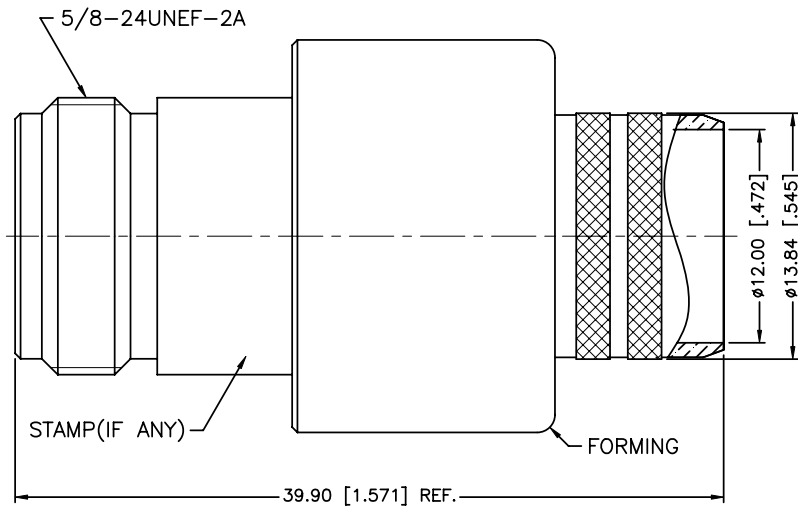

RECOMMENDED
CABLE STRIPPING DIM'S

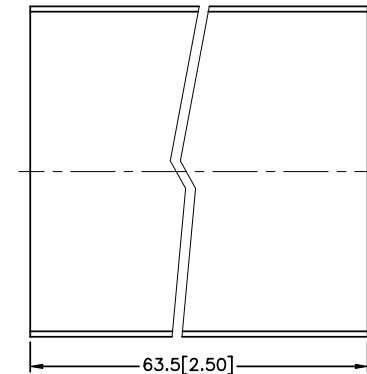

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .610"
2.CONTACT PIN TO SOLDER

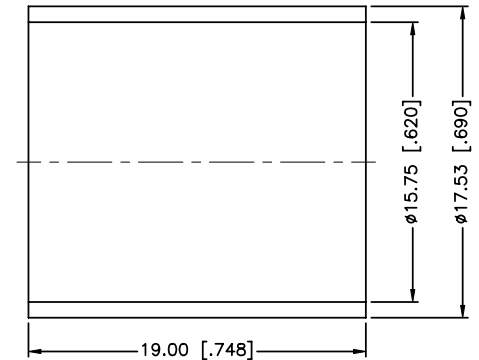

REV.	DATE	ECR NO.	DESCRIPTION
NC	03/18/98	XXXXXX	INITIAL RELEASE
A	02/19/07	XXXXXX	UPDATE DRAWING FORMAT
B	12/Jul/11	2198	THE PLATING NEXCOTE WAS NICKEL & CHANGED THE KNURL DESIGN ON BARREL

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex								
						DRAWN	R.MAO					12/Jul/11				
						CHECKED			PART DESCRIPTION N CRIMP JACK–LMR 600 CABLE							
						ISSUED										
						SHEET	1 OF 1		PART NO. 172207							
					CAD FILE	C:/CONNEX/172207.DWG			DWG. NO.	172207.DWG	REV.	B	SIZE	A	SCALE	NA
6	HEAT SHRINK TUBING			1												
5	FERRULE	BRASS	NEXCOTE	1												
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1												
3	BARREL	BRASS	NEXCOTE	1												
2	INSULATOR	PTFE	NATURAL	1												
1	BODY	BRASS	NEXCOTE	1												
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING											