

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20




© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	04MAY2015	DL	CW
	A1	REVISED PER ECR-18-004096	16MAR2018	RG	CW

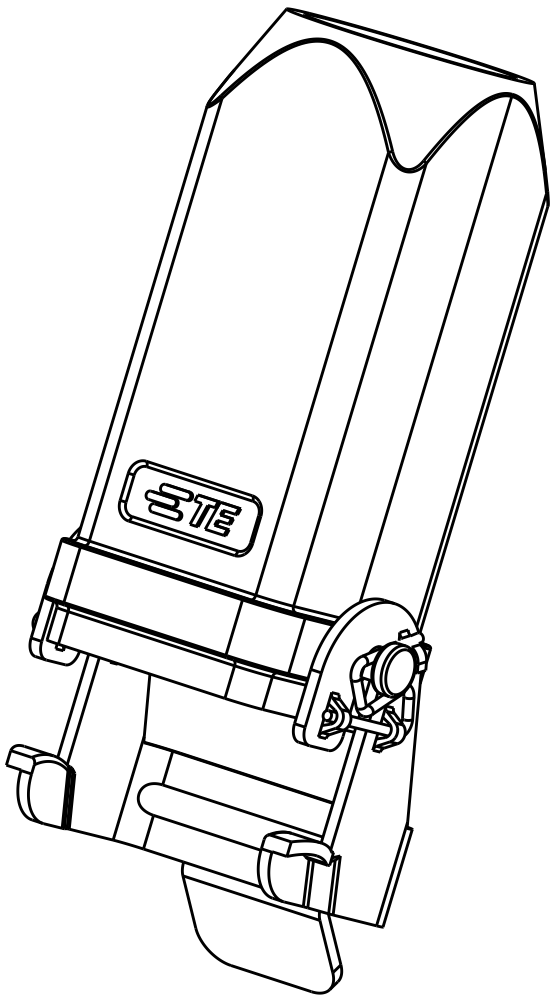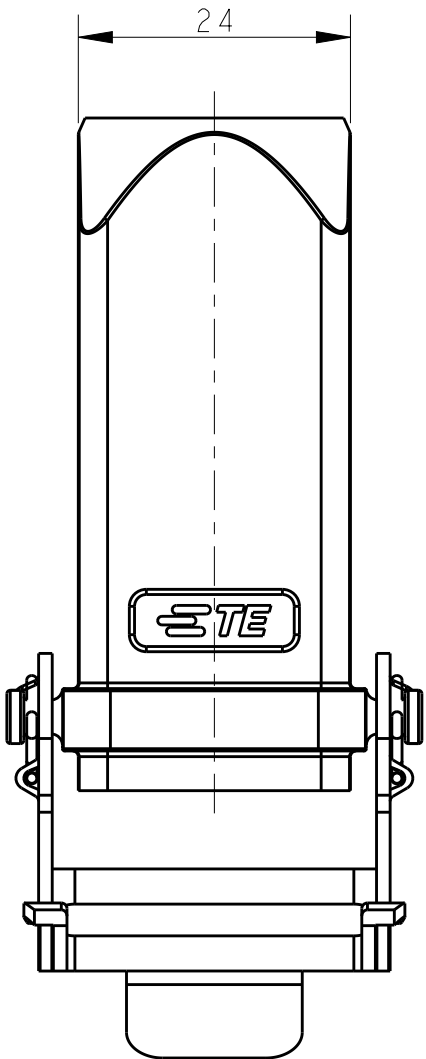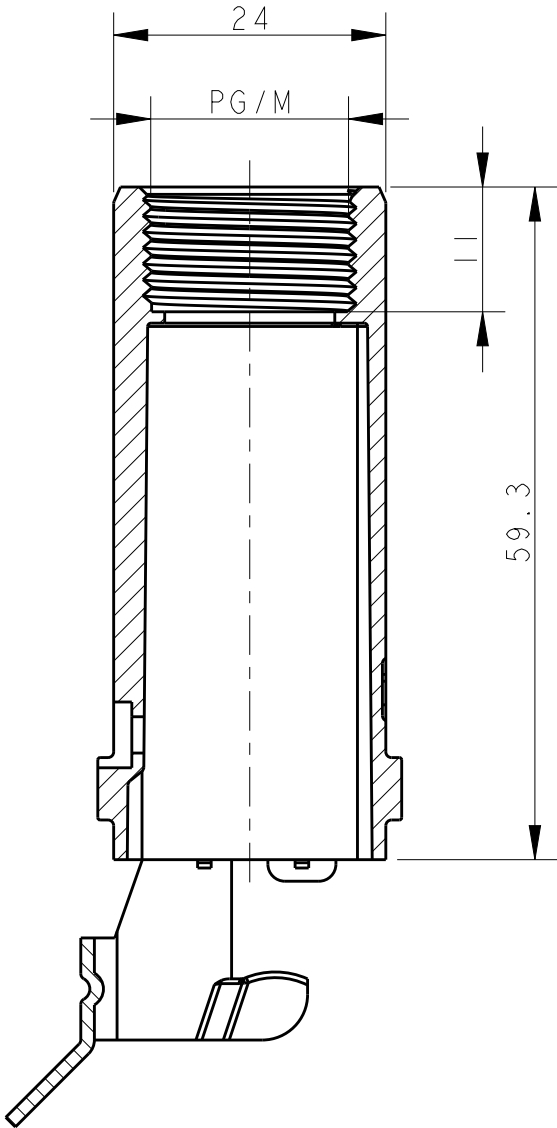


NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ZINC ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY OR RED
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 锌合金
表面处理: 粉末喷涂, 灰色 或 红色
工作温度: -40-+125°C
防护等级: IP65(配合)

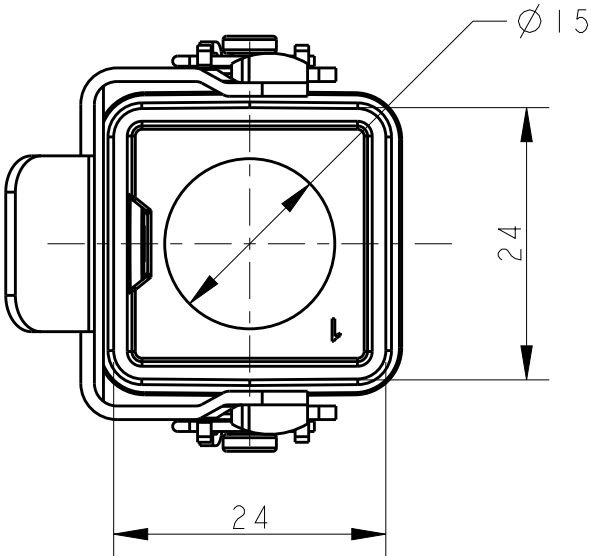

T1737030111-000	H3A-MTGVB-PG11	RED RAL2004	PG11
T1739030111-000	H3A-MTGVB-PG11	GRAY	PG11
T1739030120-000	H3A-MTGVB-M20	GRAY	M20
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION	SURFACE COATED COLOR	PG/M

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 04MAY2015	 TE Connectivity			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK CHRIS WANG 04MAY2015	NAME H3A-MTGVB-PG/M			
		APVD XU XIANG 04MAY2015				
	0 PLC ±-	PRODUCT SPEC	SIZE A3			
	1 PLC ±-	108-137012				
MATERIAL - -	2 PLC ±-	APPLICATION SPEC	DRAWING NO C-T17390301XX000			
	3 PLC ±-	114-137012				
	4 PLC ±-	WEIGHT -	SCALE 3:2			
	ANGLES ±-	CUSTOMER DRAWING				
FINISH - -	REV A1					