
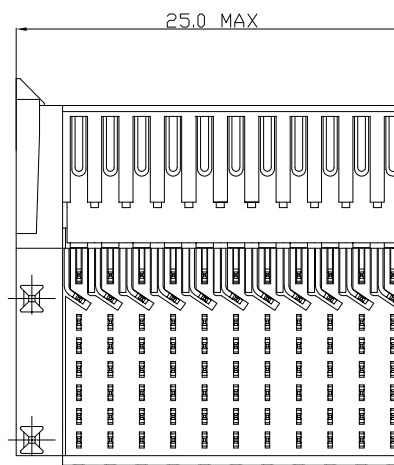
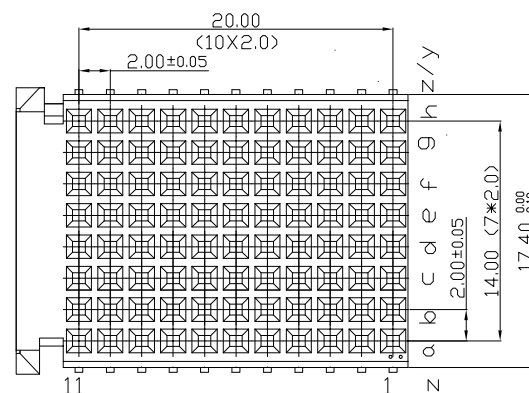
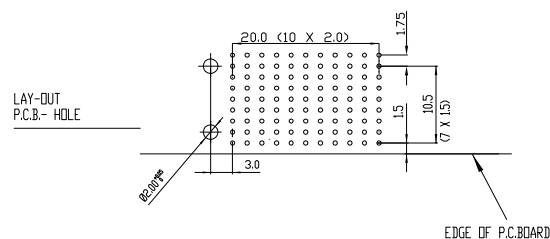


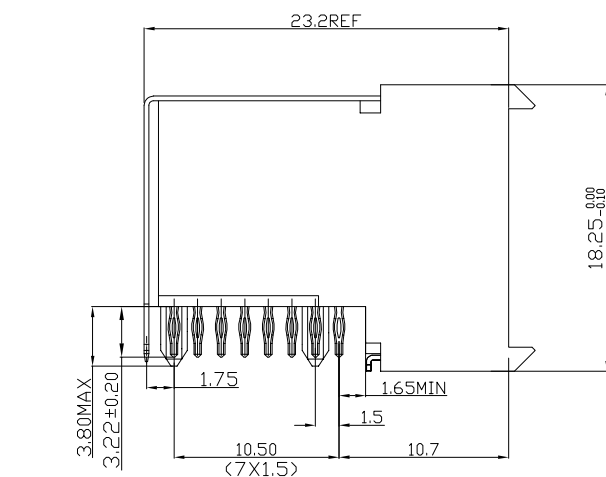

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE : 500 V AC (CONT /CONT)

OPERATING TEMPERATURE : -55°C TO 125°C

CONTACT RESISTANCE 20 MΩ MAX

INSERTION FORCE : 0.75N MAX/CONT

EXTRACTION FORCE : 0.15N MIN/CONT

INSULATION RESISTANCE : 10^4 M Ω MIN

NOTES 1. LEAD FREE INDICATOR (LF=LEAD FREE)
PERFORMANCE LEVEL INDICATOR
(REF. DWG. NO. RSC 201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.

3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BS.A.201572.001

4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

				FCI www.fciconnect.com		✓ tolerance 1DEC +0.2 1DEC 2DEC +0.1 2DEC ANGLES ±1° HOEKEN		projection 		 MM				
				Dr NOTTO		10-03-99		Product family MILLIPICS		size A4		Scale 3/1		
rev ecn no dr date				Eng				Spec ref						
A CONVERSION REVISION 01 KN 14-09-01				Chr				Material		ECN				
B DG05-03B1 Kason 10-10-05				Appr										
C DG07-03C2 Kason 05-09-07														
D DG10-0110 NZ 05-30-10														