



LOC		DIST		REVISONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	RELEASED PER ECO-14-017426		10DEC2014	-	-	
	A1	REVISED PER ECO-19-004404		23APR2019	DF	JM	

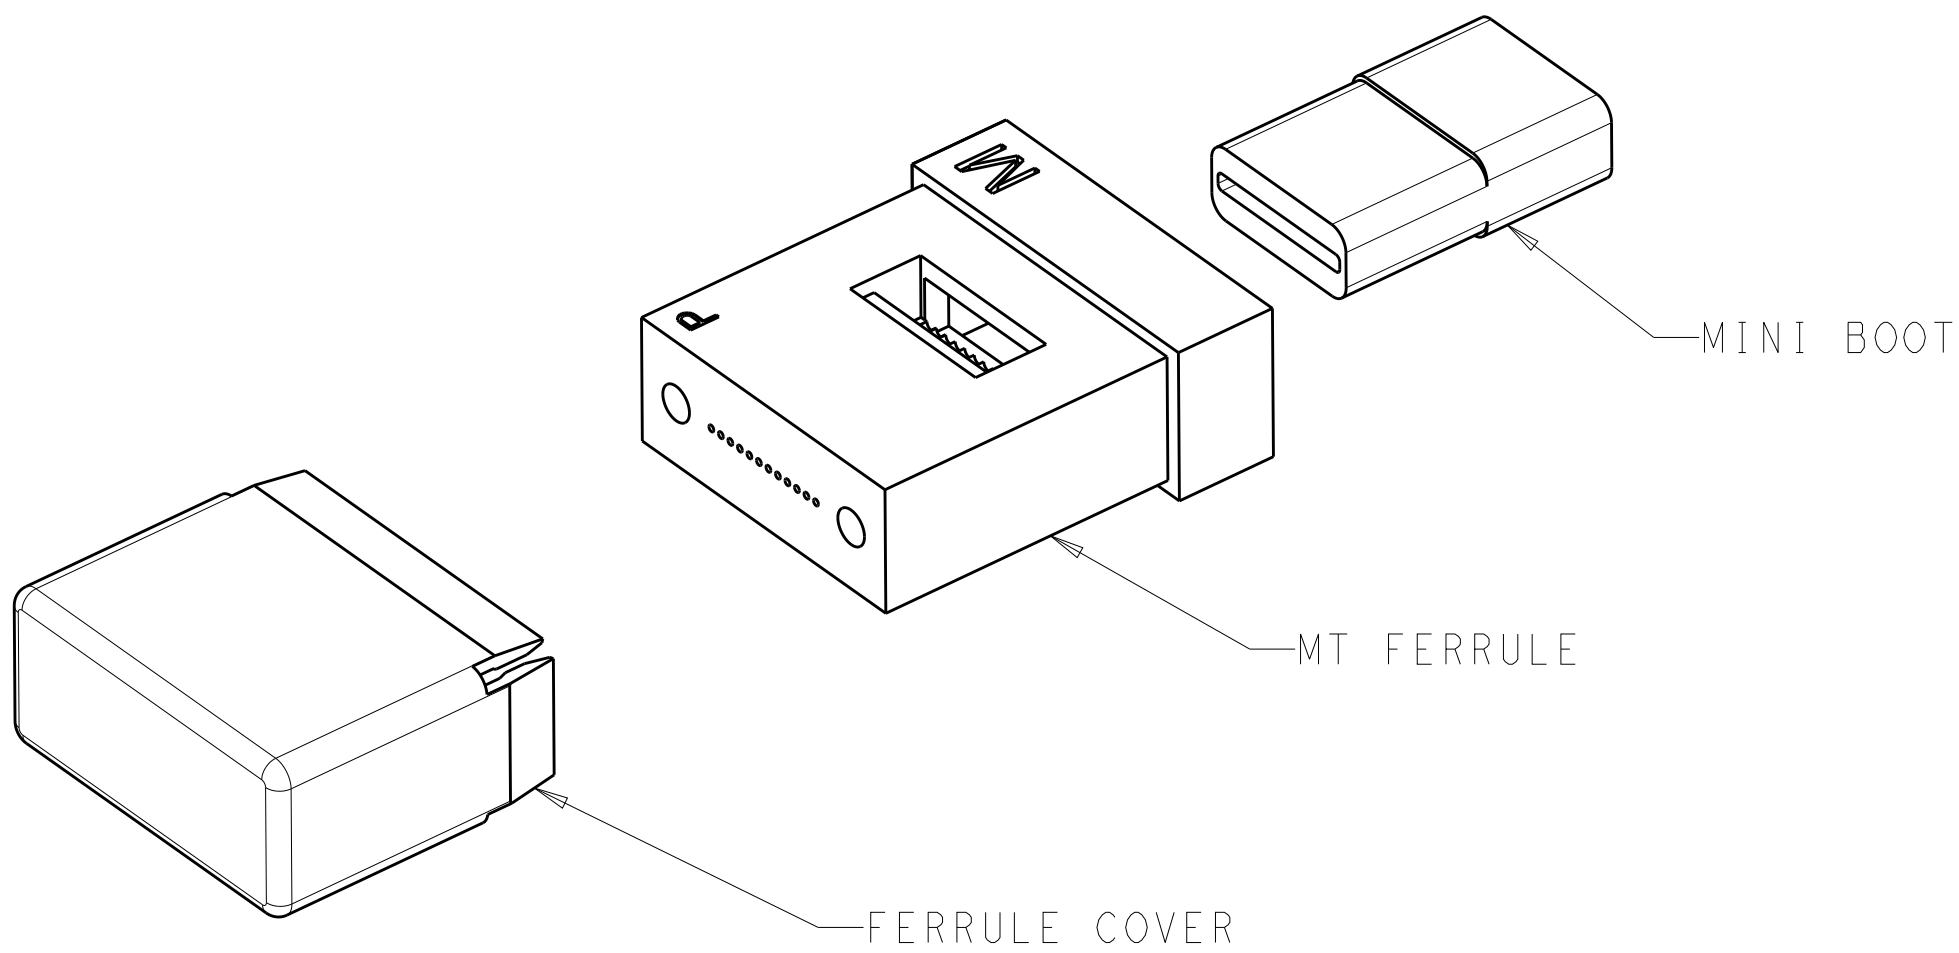

2102866-1 [△]
RECEPTACLE (BACKPLANE) KIT

- [△]1 MATERIAL:
MT FERRULE: THERMOPLASTIC, PER ASTM D4067
MINI BOOT: VULCANIZED THERPLASTIC POLYOLEFIN
FERRULE COVER: ABS THERMOPLASTIC PER ASTM D4673
SPRING: 300 SERIES STAINLESS STEEL WIRE, PER ASTM A313
PIN HOLDER: 300 SERIES STAINLESS STEEL, PER ASTM A666
PINS: 400 SERIES STAINLESS STEEL, PER ASTM A276
- [△]2 FINISH:
SPRING: PASSIVATED
- [△]3 UNASSEMBLED RECEPTACLE FIBER OPTIC KIT
CONTAINING THE MT FERRULE, MINI-BOOT AND FERRULE COVER
USE WITH RECEPTACLE (BACKPLANE) CONNECTOR KITS:
VITA 66.1: 2000973-1
VITA 66.4: 2226880-1
- [△]4 UNASSEMBLED PLUG FIBER OPTIC KIT,
CONTAINING MT FERRULE, MINI-BOOT, PIN HOLDER, SPRING AND FERRULE COVER
USE WITH PLUG (MODULE) CONNECTOR KITS:
VITA 66.1: 2000974-1
VITA 66.4: 2226881-1

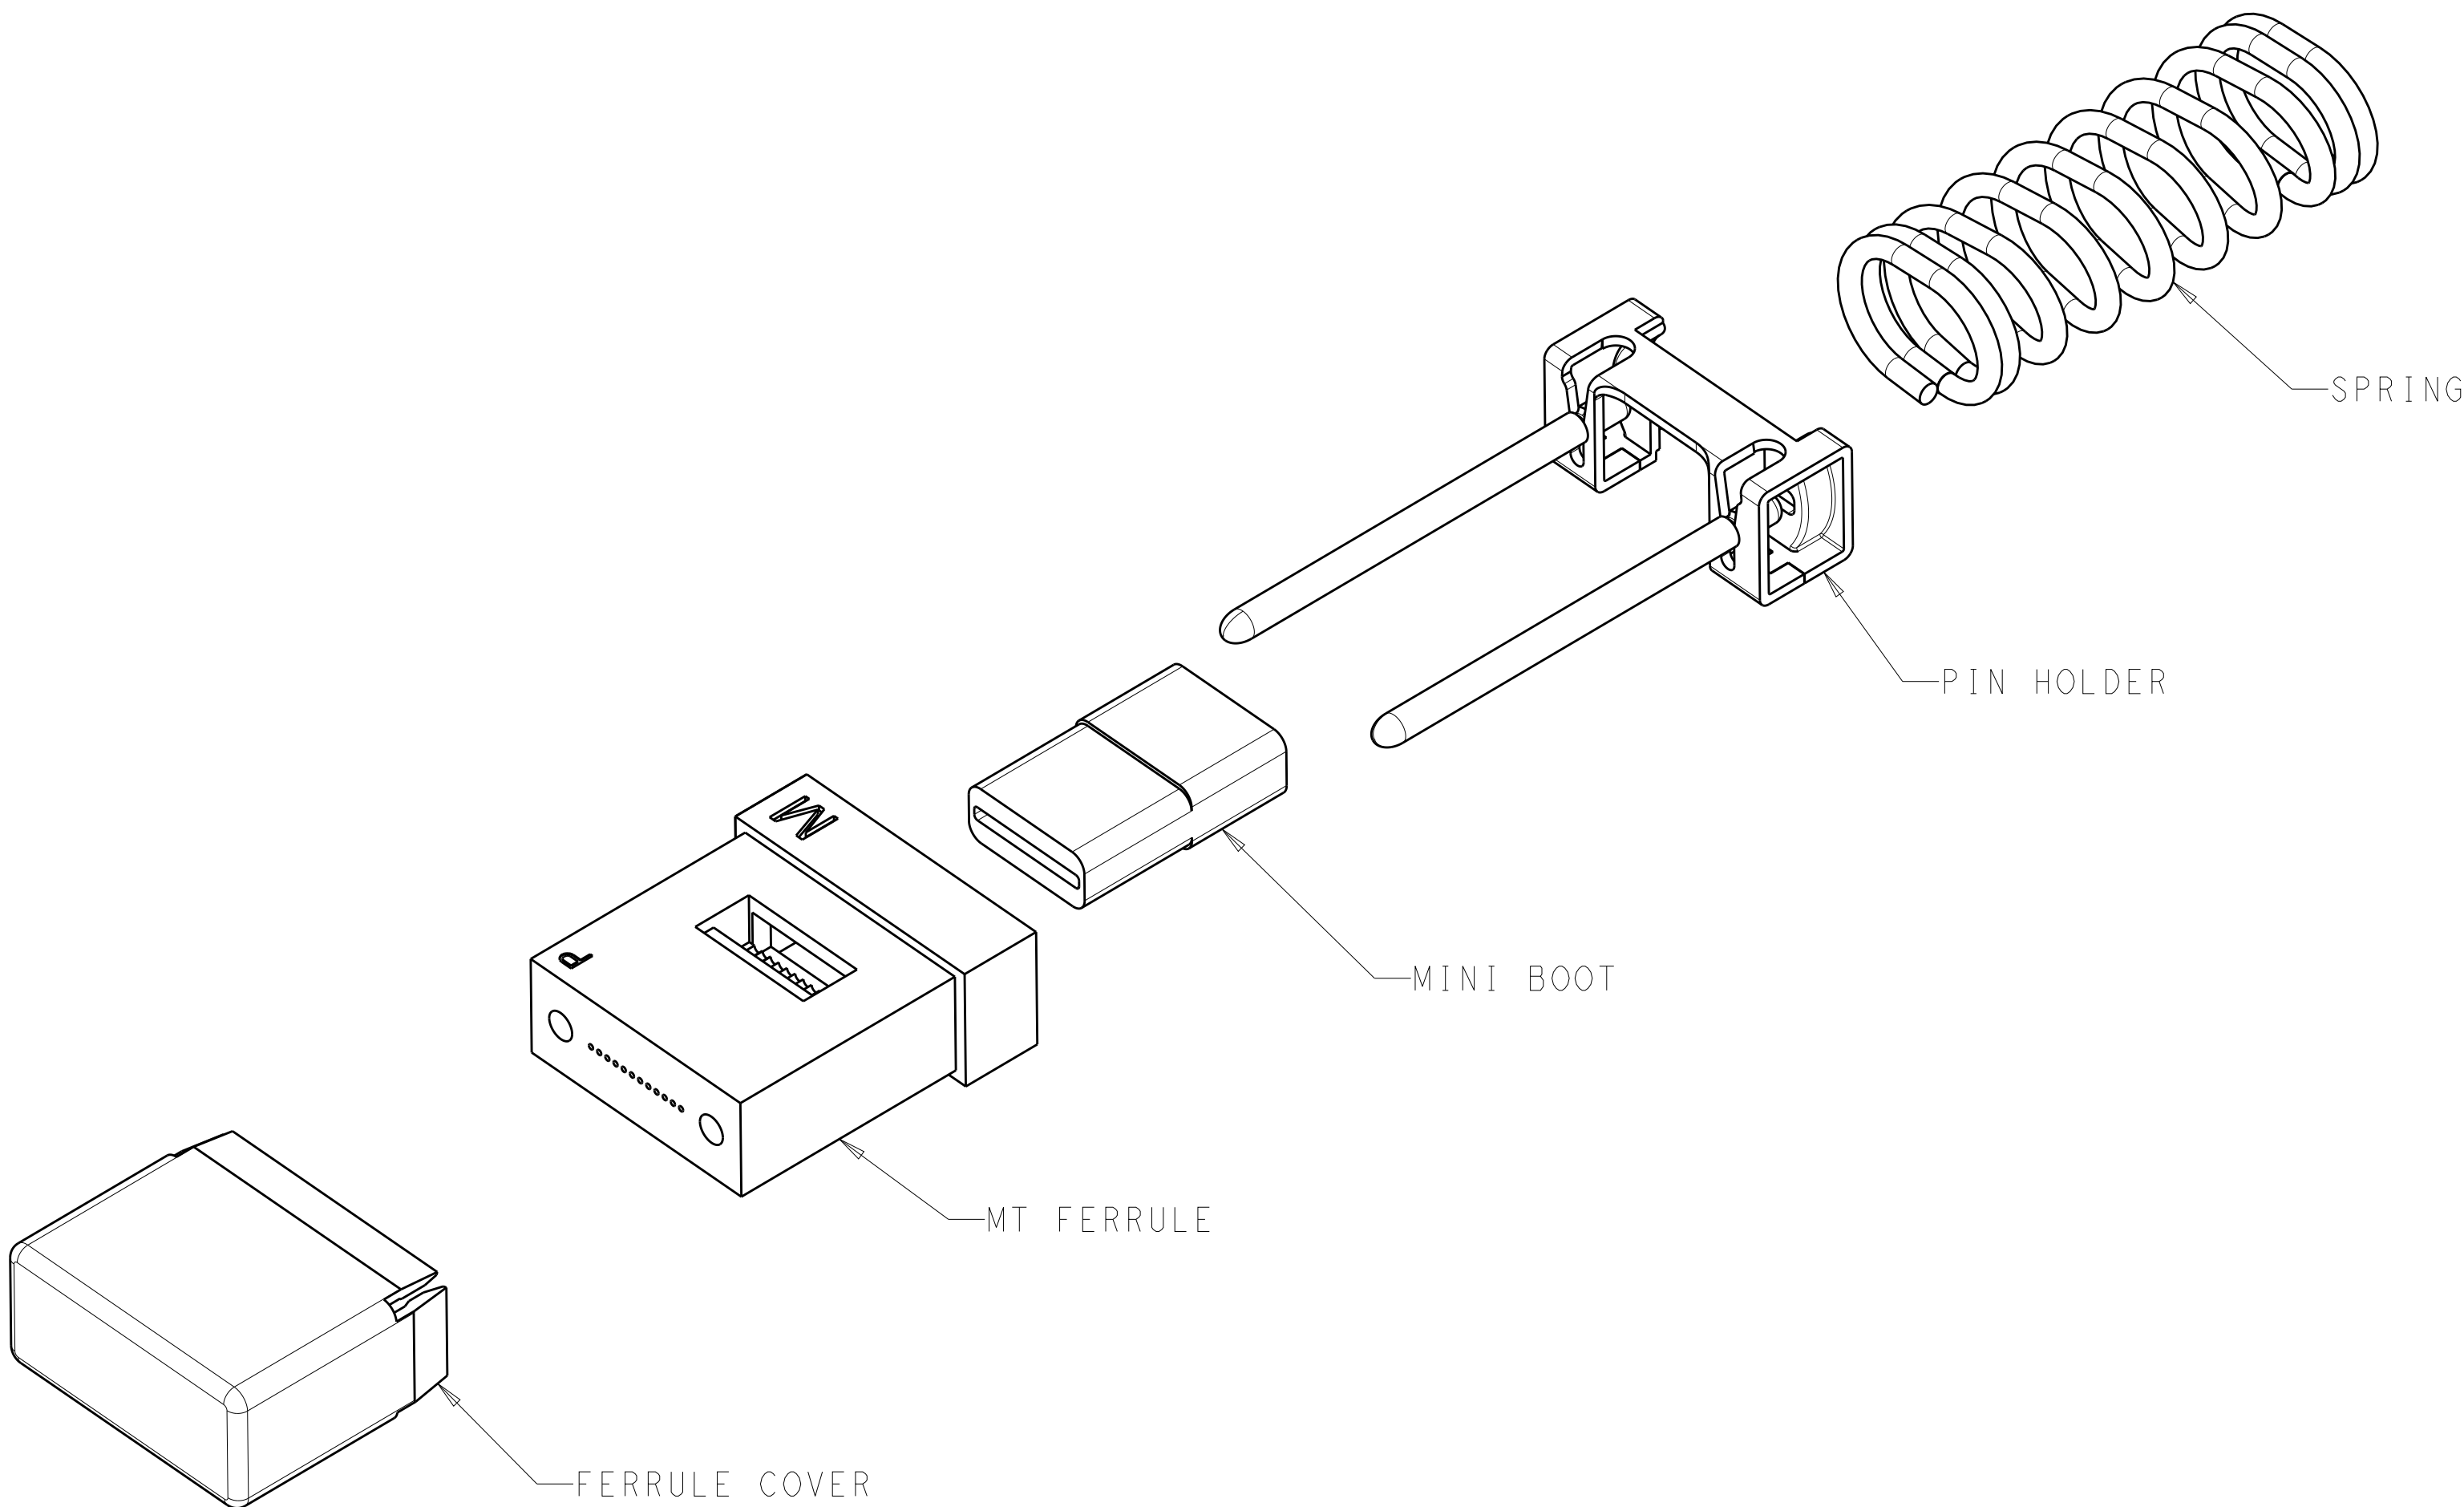

2102866-2 [△]
PLUG (MODULE) KIT

MULTI-MODE, 12-FIBER, STANDARD GRADE		UNASSEMBLED PLUG KIT		4	2102866-2									
MULTI-MODE, 12-FIBER, STANDARD-GRADE		UNASSEMBLED RECEPTACLE KIT		3	2102866-1									
MT FERRULE TYPE		COMMENTS			PART NUMBER									
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	09FEB2012		TE Connectivity									
		CHK	FABIAN -											
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	MT FERRULE KIT, 12 FIBER, MM 50/125, STANDARD GRADE FIBER OPTIC									
mm				APVD										
		0 PLC ±		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
		1 PLC ±		108-2247										
		2 PLC ±0.13		APPLICATION SPEC										
		3 PLC ±0.013		114-32050										
4 PLC ±		ANGLES		WEIGHT	A1	00779	©2102866	-						
MATERIAL		FINISH		Customer Drawing		SCALE		8:1	SHEET	1	OF	1	REV	A1
														