





3MN-Series
Snap-Action Miniature Pushbutton Switch

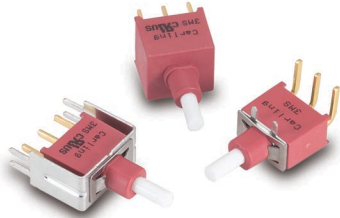

3MS-Series
Sealed Snap-Action Miniature Pushbutton Switch



3MA-Series
Alternate Action Miniature Pushbutton Switch

Specifications

Contact Rating	refer to ordering scheme
Electrical Life	50,000 make & break cycles @ full load
Contact Resistance.	<i>3MN & 3MA-Series:</i> 10 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts. <i>3MS-Series:</i> 50 mΩ max. initial @ 2-4 VDC 100mA for both silver & gold plated contacts.
Insulation Resistance . . .	1000 MΩ min.
Dielectric Strength	1500 Volts RMS @ sea level
Operating Temperature . . .	-30°C to +85°C
Index of Protection	<i>3MS -Series:</i> IP68
Cap Installation Support . .	<i>3MS-Series:</i> 10 lbs. max.
Solder Heat Resistance. . .	MIL-STD-202, Method 210
Actuator Travel25°

Materials

Case	<i>3MN & 3MA-Series:</i> Diallyl phthalate (DAP) (UL 94V-0) <i>3MS-Series:</i> Glass filled nylon 6/6, flame retardant, heat stabilized (UL 94V-0)
Plunger.	<i>3MN-Series:</i> Thermoplastic polyester, black <i>3MS & 3MA-Series:</i> Glass filled nylon or glass filled polyester (UL 94V-0)
Bushing	<i>3MN-Series:</i> Brass, nickel plated <i>3MA-Series:</i> Zinc, nickel plated
Housing.	<i>3MN & 3MA-Series:</i> Stainless Steel
Switch Support Retainer . .	<i>3MS-Series:</i> Stainless Steel
Terminal Seal	Epoxy

3M-Series Optional Cap

To order a cap assembled on a switch, specify the switch number followed by the cap part number and the word "assembled".

Ex: 3MN-SP-7-P2-B6-M6QE-C13ASSEMBLED

To order caps in bulk, specify the Series, followed by the cap. Ex.) 3MN-C13




<p>1 SERIES OR SWITCH CATALOG NUMBER 3MN, 3MS or 3MA</p>	<p>3 CAP COLOR</p> <table border="0" style="width: 100%;"> <tr> <td>1 white</td> <td>5 yellow</td> </tr> <tr> <td>2 black</td> <td>6 green</td> </tr> <tr> <td>3 red</td> <td>7 blue</td> </tr> <tr> <td>4 orange</td> <td></td> </tr> </table> <p><small>1 Black, white & red standard. Other colors available. Consult factory.</small></p>	1 white	5 yellow	2 black	6 green	3 red	7 blue	4 orange	
1 white	5 yellow								
2 black	6 green								
3 red	7 blue								
4 orange									
<p>2 CAP SIZE</p> <table border="0" style="width: 100%;"> <tr> <td>C1 round 7.6mm dia.</td> <td>C5 round 14.5mm dia.</td> </tr> <tr> <td>C2 round 9.35 mm dia.</td> <td>(for 3MA w/ PL bushing)</td> </tr> <tr> <td>C3 square 11.7 x 11.7mm</td> <td>C6 brass chrome plated</td> </tr> <tr> <td>C4 round 5mm dia.</td> <td>(for 3MA w/ PD bushing)</td> </tr> </table>	C1 round 7.6mm dia.	C5 round 14.5mm dia.	C2 round 9.35 mm dia.	(for 3MA w/ PL bushing)	C3 square 11.7 x 11.7mm	C6 brass chrome plated	C4 round 5mm dia.	(for 3MA w/ PD bushing)	
C1 round 7.6mm dia.	C5 round 14.5mm dia.								
C2 round 9.35 mm dia.	(for 3MA w/ PL bushing)								
C3 square 11.7 x 11.7mm	C6 brass chrome plated								
C4 round 5mm dia.	(for 3MA w/ PD bushing)								

3MN-Series Ordering Scheme

with Square Actuator



with Plunger Actuator

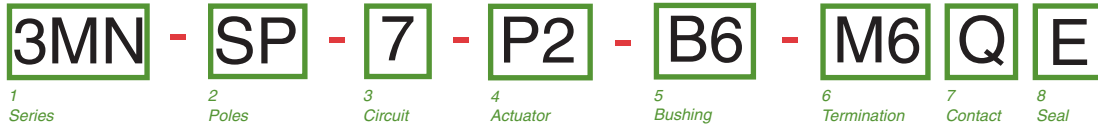


1 SERIES 3MN Snap-Action Miniature Pushbutton Switch
2 POLES SP single pole DP double pole
3 CIRCUIT () - momentary 7 ON (ON)
4 ACTUATOR¹ SQUARE ACTUATOR (use with Color Options in Selection 5A & 5B.) AP1 square with no frame AP2 square raised above frame AP3 square flush with frame PLUNGER ACTUATOR (use with Bushing Options in Selection 5) P0 2.5mm short plunger(for B6 bushing only) P1 5.2mm plunger(for bushing B10,B11,B20,B21; 7.5mm for B6) P2 2.0mm plunger(for bushing B10,B11,B20,B21; 4.2mm for B6)
5A ACTUATOR COLOR & 5B FRAME COLOR^{1,2} 1 white 4 orange 7 blue 2 black 5 yellow 8 brown 3 red 6 green 9 gray 1 Black, white and red are standard. Other colors available, consult factory for details. 2 Selection 5B is blank if actuator style is AP1 (no frame)
OR
5 BUSHING B6 Unthreaded (for terminations VS6-VS9 only) B10 Threaded keyway B11 Threaded with flat B20 Unthreaded keyway B21 Unthreaded with flat NOTE: If ordering optional CAP with bushings B10, B11, B20 or B21, specify actuator P1. For CAP with bushing B6, specify actuator P2. For CAP options, see ordering scheme on page 35.

6 TERMINATION			
M1	Solder Lug		
M2	PCB		
M5-1	Wire Wrap .750 [19.05]		
M5-3	Wire Wrap .425 [10.80]		
M6	PC Mount, 90° horizontal		
M7	PC Mount, 90° vertical		
VS2	PC Mount, U bracket, .620 mounting x .460 high		
VS3	PC Mount, U bracket, .620 mounting x .630 high		
VS4	PC Mount, U bracket, .750 mounting x .460 high		
VS5	PC Mount, U bracket, .750 mounting x .630 high		
VS6	PC Mount, U bracket, .460 high (for B6 bushing only)		
VS7	PC Mount, U bracket, .630 high (for B6 bushing only)		
VS8	PC Mount, U bracket, .460 high (for B6 bushing only)		
VS9	PC Mount, U bracket, .630 high (for B6 bushing only)		

7 CONTACT				
	<i>Material</i>	<i>Terminal Plating</i>	<i>Rating</i>	<i>Approvals</i>
G	silver ¹	gold over silver ³	1A@120VAC or 28VDC	UL, CUL
Q	silver ¹	silver ¹	1A@120VAC or 28VDC	UL, CUL
R	gold ²	gold ²	0.4VA max. @20V max (AC/DC)	
NOTE: Tin-lead option available with PC type terminations only.				
1 Moveable contact & terminals: copper alloy, silver plate				
2 Moveable contact & terminals: copper alloy with gold plate over nickel plate				
3 Terminals: silver plate with outer layer in gold plating				


8 EPOXY SEAL	
E	epoxy seal

3MS-Series Ordering Scheme

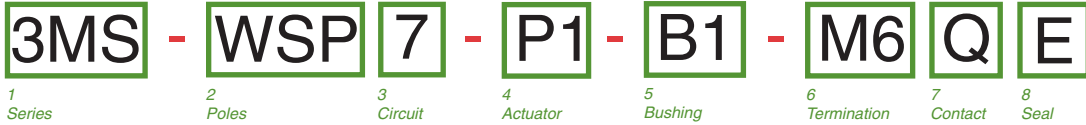

<p>1 SERIES 3MS Sealed Snap-Action Miniature Pushbutton Switch</p> <hr/> <p>2 POLES WSP single pole WDP double pole</p> <hr/> <p>3 CIRCUIT () - momentary 7 ON (ON)</p> <hr/> <p>4 ACTUATOR P1 .173" plunger (for B1 bushing); .276" (for B4 bushing) P2 .220" plunger (for B1 bushing); .327" (for B4 bushing) P3 .087" plunger (for B1 bushing); .193" (for B4 bushing)</p> <hr/> <p>5 BUSHING B1 Threaded B4 Unthreaded</p>	<p>6 TERMINATION</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">M1 Solder Lug</td> <td style="width: 50%;">VS21 Snap-In, U bracket, .620 mounting x .460 high</td> </tr> <tr> <td>M2 PCB</td> <td>VS3 PC Mount, U bracket, .620 mounting x .630 high</td> </tr> <tr> <td>M6 PC Mount, 90° horizontal</td> <td>VS4 PC Mount, U bracket, .750 mounting x .460 high</td> </tr> <tr> <td>M61 Snap-In, 90° horizontal</td> <td>VS5 PC Mount, U bracket, .750 mounting x .630 high</td> </tr> <tr> <td>M7 PC Mount, 90° vertical</td> <td></td> </tr> <tr> <td>M71 Snap-In, 90° vertical</td> <td></td> </tr> <tr> <td>VS2 PC Mount, U bracket, .620 mounting x .460 high</td> <td></td> </tr> </table> <hr/> <p>7 CONTACT</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Material</th> <th>Terminal Plating</th> <th>Rating</th> <th>Approvals</th> </tr> </thead> <tbody> <tr> <td>G silver¹</td> <td>gold over silver³</td> <td>1A @ 120VAC or 28VDC</td> <td>UL, CUL IP68</td> </tr> <tr> <td>Q silver¹</td> <td>silver¹</td> <td>1A @ 120VAC or 28VDC</td> <td>UL, CUL IP68</td> </tr> <tr> <td>R gold²</td> <td>gold²</td> <td>0.4VA max. @ 20V max (AC/DC)</td> <td>IP68</td> </tr> </tbody> </table> <p>NOTE: Tin-lead option available with PC type terminations only. 1 Moveable contact & terminals: copper alloy, silver plate 2 Moveable contact & terminals: copper alloy with gold plate over nickel plate 3 Terminals: silver plate with outer layer in gold plating</p> <hr/> <p>7 EPOXY SEAL E epoxy seal</p>	M1 Solder Lug	VS21 Snap-In, U bracket, .620 mounting x .460 high	M2 PCB	VS3 PC Mount, U bracket, .620 mounting x .630 high	M6 PC Mount, 90° horizontal	VS4 PC Mount, U bracket, .750 mounting x .460 high	M61 Snap-In, 90° horizontal	VS5 PC Mount, U bracket, .750 mounting x .630 high	M7 PC Mount, 90° vertical		M71 Snap-In, 90° vertical		VS2 PC Mount, U bracket, .620 mounting x .460 high		Material	Terminal Plating	Rating	Approvals	G silver ¹	gold over silver ³	1A @ 120VAC or 28VDC	UL, CUL IP68	Q silver ¹	silver ¹	1A @ 120VAC or 28VDC	UL, CUL IP68	R gold ²	gold ²	0.4VA max. @ 20V max (AC/DC)	IP68
M1 Solder Lug	VS21 Snap-In, U bracket, .620 mounting x .460 high																														
M2 PCB	VS3 PC Mount, U bracket, .620 mounting x .630 high																														
M6 PC Mount, 90° horizontal	VS4 PC Mount, U bracket, .750 mounting x .460 high																														
M61 Snap-In, 90° horizontal	VS5 PC Mount, U bracket, .750 mounting x .630 high																														
M7 PC Mount, 90° vertical																															
M71 Snap-In, 90° vertical																															
VS2 PC Mount, U bracket, .620 mounting x .460 high																															
Material	Terminal Plating	Rating	Approvals																												
G silver ¹	gold over silver ³	1A @ 120VAC or 28VDC	UL, CUL IP68																												
Q silver ¹	silver ¹	1A @ 120VAC or 28VDC	UL, CUL IP68																												
R gold ²	gold ²	0.4VA max. @ 20V max (AC/DC)	IP68																												


3MA-Series Ordering Scheme

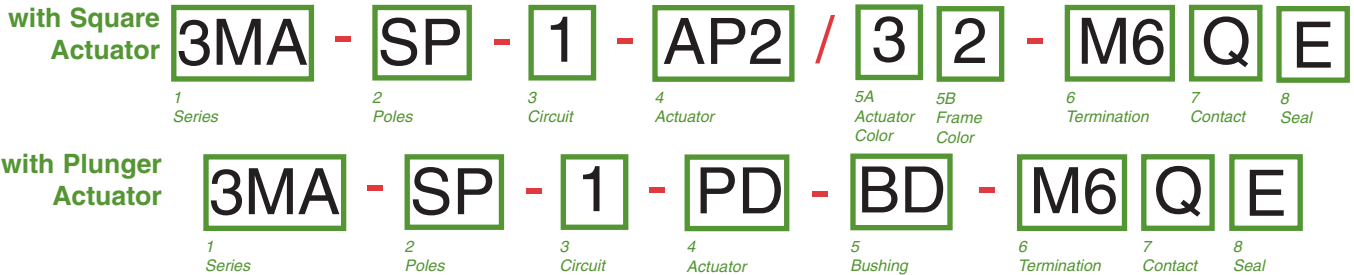

<p>1 SERIES 3MA Alternate-Action Miniature Pushbutton Switch</p> <hr/> <p>2 POLES SP single pole DP double pole 3P three pole 4P four pole</p> <hr/> <p>3 CIRCUIT () - momentary <i>Switching Position:</i> 1 ON 2-3, 5-6, 8-9, 11-12 OPEN 2-1, 5-4, 8-7, 11-10 ON 2 ON NONE (ON)</p> <hr/> <p>4 ACTUATOR SQUARE ACTUATOR (use with Color Options in Selection 5A & 5B.) AP1 square with no frame AP2 square raised above frame PLUNGER ACTUATOR (use with Bushing Options in Selection 5) PA .118 dia. x .299" plunger length PI .118 dia. x .244" plunger length PL .118 dia. x .327" plunger length PC .315" dia. brass chrome plated plunger (for BD bushing only) PD .242" dia. brass chrome plated plunger (for BD bushing only)</p> <hr/> <p>5A ACTUATOR COLOR & 5B FRAME COLOR^{1,2} 1 white 4 orange 7 blue 2 black 5 yellow 8 brown 3 red 6 green 9 gray 1 Black, red and white are standard. Other colors available, consult factory for details. 2 Selection 5B is blank if actuator style AP1 (no frame) OR</p> <hr/> <p>5 BUSHING BD Big bushing for PC, PD actuator 15/32" B10 Threaded 1/4 - 40 B20 Unthreaded B21 Unthreaded with flat NOTE: For CAP options, see ordering scheme on page 35.</p>	<p>6 TERMINATION</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">M1 Solder Lug</td> <td style="width: 50%;">VS2 PC Mount, U bracket, .620 mounting x .460 high</td> </tr> <tr> <td>M2 PCB</td> <td>VS3 PC Mount, U bracket, .620 mounting x .630 high</td> </tr> <tr> <td>M5-1 Wire Wrap .750 [19.05]</td> <td>VS4 PC Mount, U bracket, .750 mounting x .460 high</td> </tr> <tr> <td>M5-2 Wire Wrap .964 [24.48]</td> <td>VS5 PC Mount, U bracket, .750 mounting x .630 high</td> </tr> <tr> <td>M5-3 Wire Wrap .425 [10.80]</td> <td></td> </tr> <tr> <td>M5-4 Wire Wrap 1.062 [26.87]</td> <td></td> </tr> <tr> <td>M6 PC Mount, 90° horizontal</td> <td></td> </tr> <tr> <td>M7 PC Mount, 90° vertical</td> <td></td> </tr> </table> <hr/> <p>7 CONTACT</p> <table style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Material</th> <th>Terminal Plating</th> <th>Rating</th> <th>Approvals</th> </tr> </thead> <tbody> <tr> <td>G silver¹</td> <td>gold over silver³</td> <td>6A @ 125VAC or 28VDC, 3A @ 250VAC</td> <td>UL, CUL</td> </tr> <tr> <td>K gold²</td> <td>tin-lead⁴</td> <td>6A @ 125VAC or 28VDC</td> <td>UL, CUL</td> </tr> <tr> <td>P silver¹</td> <td>tin-lead⁴</td> <td>6A @ 125VAC or 28VDC, 3A @ 250VAC</td> <td>UL, CUL</td> </tr> <tr> <td>Q silver¹</td> <td>silver¹</td> <td>6A @ 125VAC or 28VDC, 3A @ 250VAC</td> <td>UL, CUL</td> </tr> <tr> <td>R gold²</td> <td>gold²</td> <td>0.4VA max. @ 20V max (AC/DC)</td> <td></td> </tr> </tbody> </table> <p>NOTE: Tin-lead option available with PC type terminations only. 1 Moveable contact & terminals: copper alloy, silver plate 2 Moveable contact & terminals: copper alloy with gold plate over nickel plate 3 Terminals: silver plate with outer layer in gold plating 4 Outer terminals: copper alloy with tin-lead over nickel plate</p> <hr/> <p>8 EPOXY SEAL E epoxy seal</p>	M1 Solder Lug	VS2 PC Mount, U bracket, .620 mounting x .460 high	M2 PCB	VS3 PC Mount, U bracket, .620 mounting x .630 high	M5-1 Wire Wrap .750 [19.05]	VS4 PC Mount, U bracket, .750 mounting x .460 high	M5-2 Wire Wrap .964 [24.48]	VS5 PC Mount, U bracket, .750 mounting x .630 high	M5-3 Wire Wrap .425 [10.80]		M5-4 Wire Wrap 1.062 [26.87]		M6 PC Mount, 90° horizontal		M7 PC Mount, 90° vertical		Material	Terminal Plating	Rating	Approvals	G silver ¹	gold over silver ³	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL	K gold ²	tin-lead ⁴	6A @ 125VAC or 28VDC	UL, CUL	P silver ¹	tin-lead ⁴	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL	Q silver ¹	silver ¹	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL	R gold ²	gold ²	0.4VA max. @ 20V max (AC/DC)	
M1 Solder Lug	VS2 PC Mount, U bracket, .620 mounting x .460 high																																								
M2 PCB	VS3 PC Mount, U bracket, .620 mounting x .630 high																																								
M5-1 Wire Wrap .750 [19.05]	VS4 PC Mount, U bracket, .750 mounting x .460 high																																								
M5-2 Wire Wrap .964 [24.48]	VS5 PC Mount, U bracket, .750 mounting x .630 high																																								
M5-3 Wire Wrap .425 [10.80]																																									
M5-4 Wire Wrap 1.062 [26.87]																																									
M6 PC Mount, 90° horizontal																																									
M7 PC Mount, 90° vertical																																									
Material	Terminal Plating	Rating	Approvals																																						
G silver ¹	gold over silver ³	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL																																						
K gold ²	tin-lead ⁴	6A @ 125VAC or 28VDC	UL, CUL																																						
P silver ¹	tin-lead ⁴	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL																																						
Q silver ¹	silver ¹	6A @ 125VAC or 28VDC, 3A @ 250VAC	UL, CUL																																						
R gold ²	gold ²	0.4VA max. @ 20V max (AC/DC)																																							


3MN-Series Dimensional Specifications: in. [mm]

PLUNGER



OPTION CODE	DIM. "A"
P0	.000 [0.00]
P1	.205 [5.20]
P2	.079 [2.00]

FOR B10,B11,B20,B21 ONLY





OPTION CODE	DIM. "A"
P0	.098 [2.50]
P1	.295 [7.50]
P2	.165 [4.20]


FOR B6 ONLY

ACTUATOR



AP1

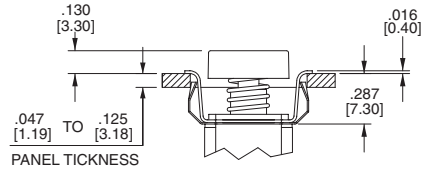


PANEL MOUNTING

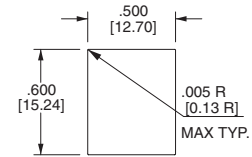



AP2

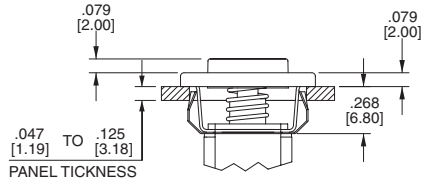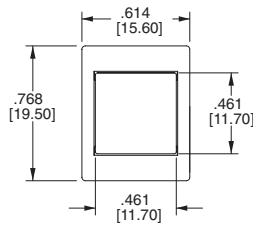

PANEL MOUNTING

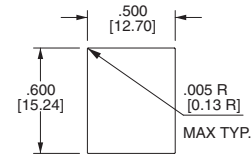


AP3

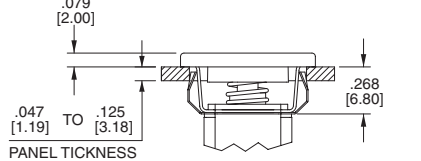


BUSHING


B10
STANDARD KEYWAY
THREADED SHOWN




B20
STANDARD KEYWAY
NON-THREADED




B11
THREADED SHOWN
WITH FLAT



B21
NON-THREADED
WITH FLAT




B6
NON-THREADED
(FOR TERMINATION
OPTIONS VS6-VS9 ONLY)




CAP


C1




C2



C3




C4



3MN-Series Dimensional Specifications: in. [mm]


TERMINATION

M1




THK .030 [0.75]

M2



THK .030 [0.75]

M5




THK .030 [0.75]

OPTION CODE	DIM. "A"
M5-1	.750 [19.05]
M5-3	.425 [10.80]

SINGLE POLE


DOUBLE POLE

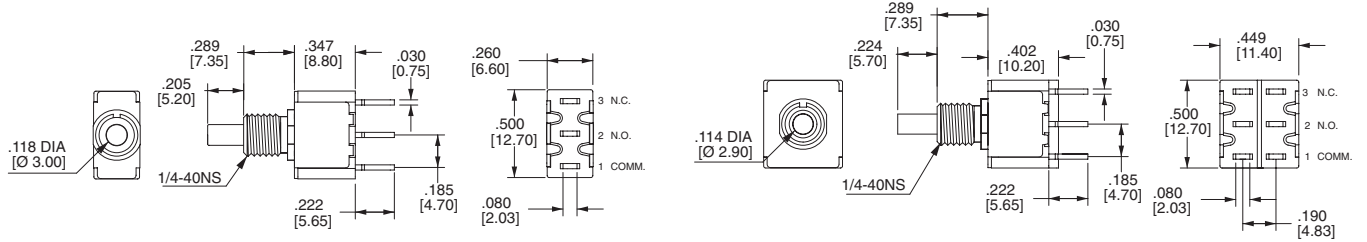

M6


SINGLE POLE

PC MOUNTING

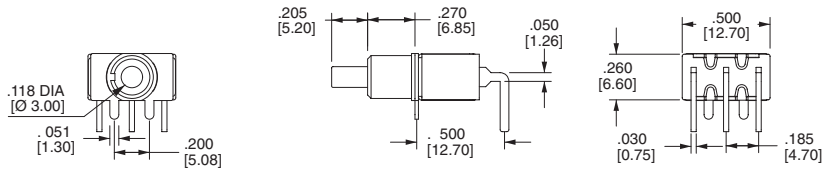

DOUBLE POLE


PC MOUNTING

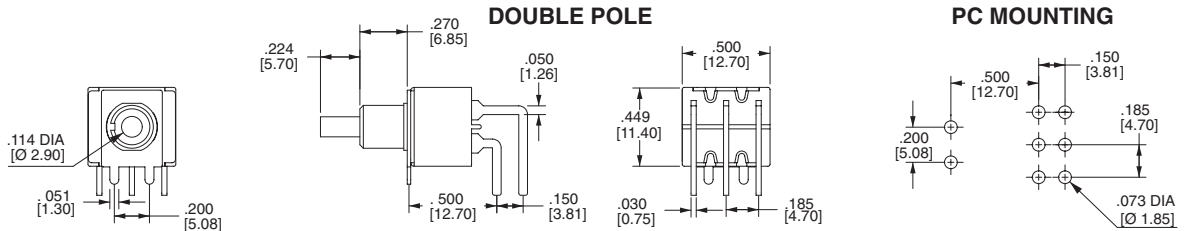

M7


SINGLE POLE

PC MOUNTING

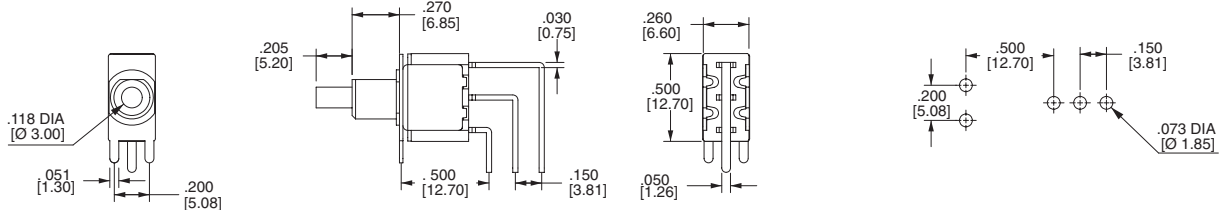





DOUBLE POLE

PC MOUNTING




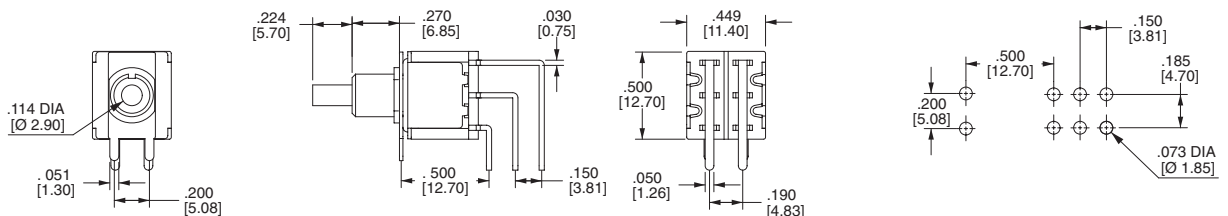


3MN-Series Dimensional Specifications: in. [mm]
TERMINATION
SINGLE POLE





OPTION CODE	DIM. "A"
VS2	.460 [11.68]
VS3	.630 [16.00]
VS7	[16.00]


PC MOUNTING

VS2-VS3

**VS6-VS7
(For B6 Bushing Only)**

DOUBLE POLE





OPTION CODE	DIM. "A"
VS2	.460 [11.68]
VS6	[11.68]
VS3	.630 [16.00]
VS7	[16.00]


PC MOUNTING

VS2-VS3

**VS6-VS7
(For B6 Bushing Only)**

SINGLE POLE

OPTION CODE	DIM. "A"
VS4	.460 [11.68]
VS8	[11.68]
VS5	.630 [16.00]
VS9	[16.00]


PC MOUNTING

VS4-VS5

**VS8-VS9
(For B6 Bushing Only)**

DOUBLE POLE

OPTION CODE	DIM. "A"
VS4	.460 [11.68]
VS8	[11.68]
VS5	.630 [16.00]
VS9	[16.00]


PC MOUNTING

VS4-VS5

**VS8-VS9
(For B6 Bushing Only)**


3MS-Series Dimensional Specifications: in. [mm]

PLUNGER

<p>FOR B1 BUSHING</p> <table border="1"> <thead> <tr> <th>OPTION CODE</th> <th>DIM. "A"</th> </tr> </thead> <tbody> <tr> <td>P1</td> <td>.173 [4.40]</td> </tr> <tr> <td>P2</td> <td>.220 [5.60]</td> </tr> <tr> <td>P3</td> <td>.087 [2.20]</td> </tr> </tbody> </table>	OPTION CODE	DIM. "A"	P1	.173 [4.40]	P2	.220 [5.60]	P3	.087 [2.20]	<p>FOR B4 BUSHING</p> <table border="1"> <thead> <tr> <th>OPTION CODE</th> <th>DIM. "A"</th> </tr> </thead> <tbody> <tr> <td>P1</td> <td>.276 [7.00]</td> </tr> <tr> <td>P2</td> <td>.327 [8.30]</td> </tr> <tr> <td>P3</td> <td>.193 [4.90]</td> </tr> </tbody> </table>	OPTION CODE	DIM. "A"	P1	.276 [7.00]	P2	.327 [8.30]	P3	.193 [4.90]
OPTION CODE	DIM. "A"																
P1	.173 [4.40]																
P2	.220 [5.60]																
P3	.087 [2.20]																
OPTION CODE	DIM. "A"																
P1	.276 [7.00]																
P2	.327 [8.30]																
P3	.193 [4.90]																

BUSHING

<p>B1</p>	<p>B4</p>
------------------	------------------

TERMINATION

<p>M1</p>	<p>M2</p>
------------------	------------------

<p>SINGLE POLE</p>	<p>DOUBLE POLE</p>
---------------------------	---------------------------


M6

	<p>SINGLE POLE</p>		<p>PC MOUNTING</p>
	<p>DOUBLE POLE</p>		<p>PC MOUNTING</p>


3MS-Series Dimensional Specifications: in. [mm]

TERMINATION


M7

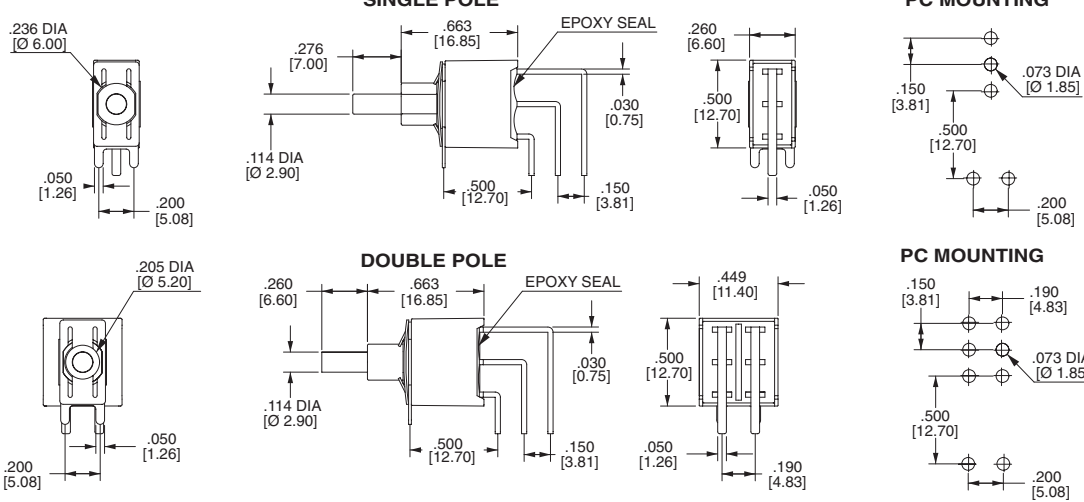

VS2-VS3

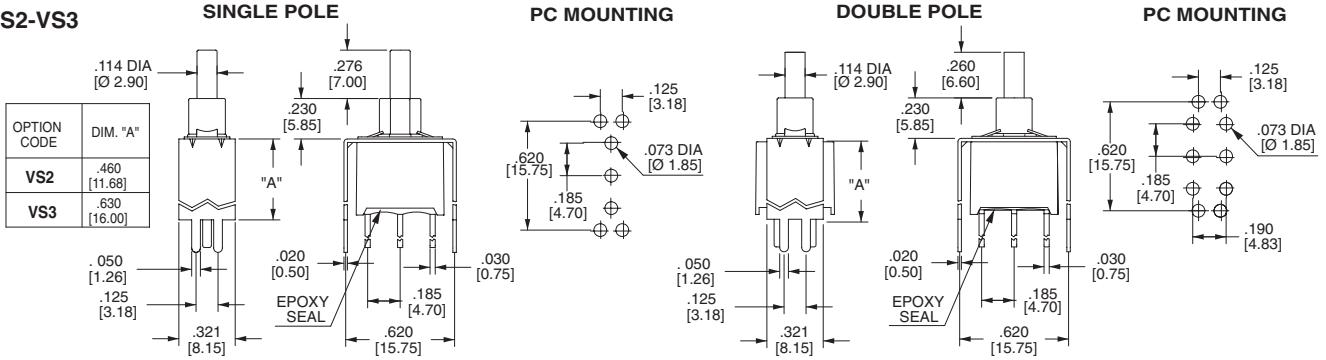

VS4-VS5

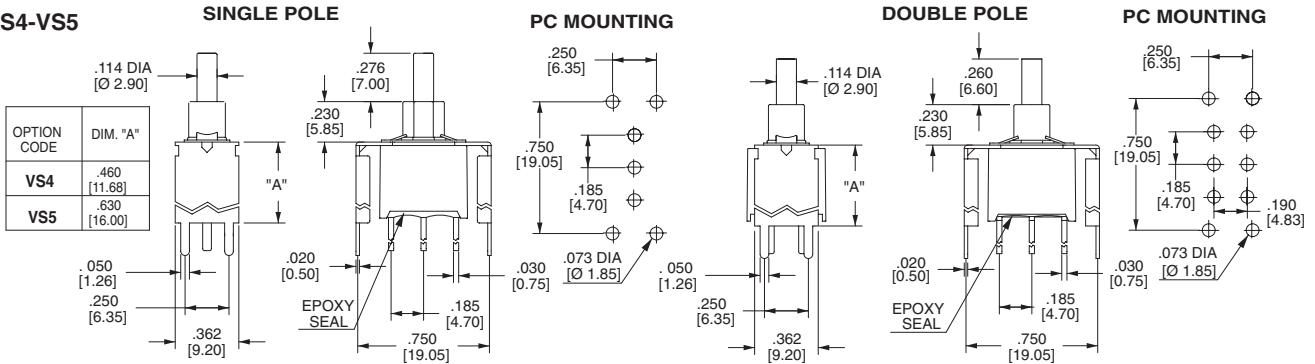


SNAP-IN TERMINATION OPTIONS


M61



M71

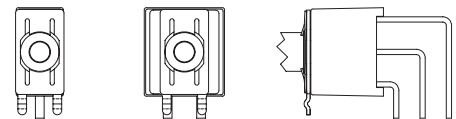

VS21, VS31



VS41, VS51





M61, M71, VS21, VS31, VS41, VS51 have the same P.C. mounting but with snap-in bracket.


3MA-Series Dimensional Specifications: in. [mm]

ACTUATOR



AP1

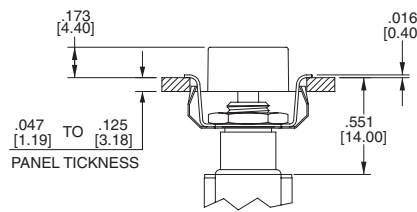


PANEL MOUNTING

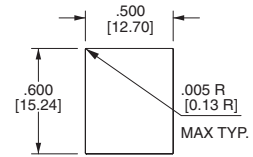

AP2

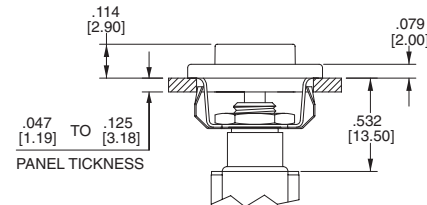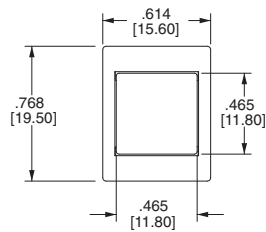


PANEL MOUNTING

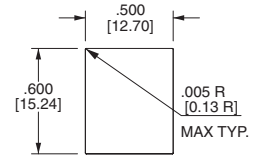


PLUNGER

PA,PI




OPTION CODE	DIM. "A"
PA	.299 [7.60]
PI	.244 [6.20]

PL




PC



Brass Chrome Plated


PD




PC, PD Plunger must fit with BD bushing

CAP


C1




C2

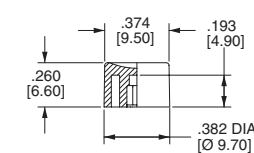


C3



C4




C5

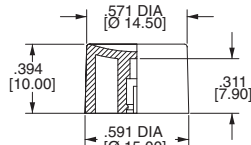

For PL Bushing Only


C6




For PD Bushing Only

BUSHING


B10 Threaded
B20 Non-Threaded

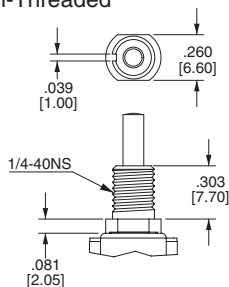

B21 Non-Threaded

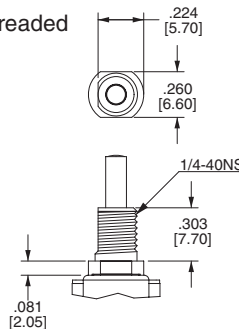


BD

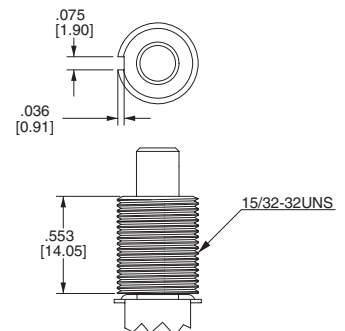


3MA-Series Dimensional Specifications: in. [mm]

TERMINATION


M1



M2






M5



OPTION CODE	DIM. "A"
M5-1	.750 [19.05]
M5-2	.964 [24.48]
M5-3	.425 [10.80]
M5-4	1.062 [26.97]




SINGLE POLE

DOUBLE POLE

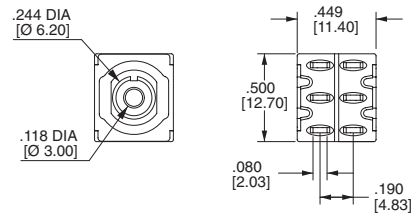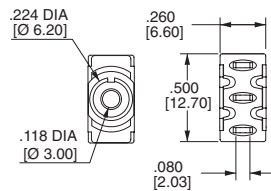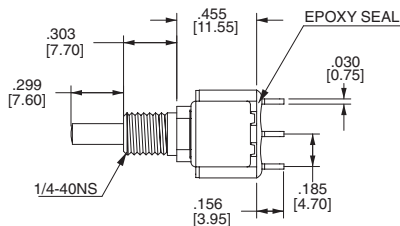

3 POLE




4 POLE

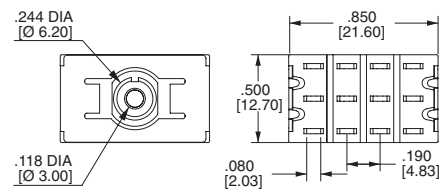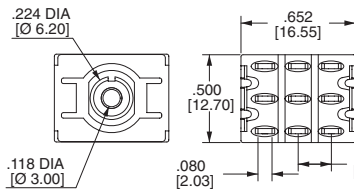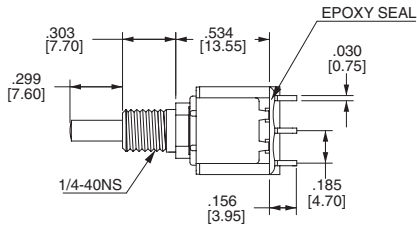

M6




SINGLE POLE

PC MOUNTING

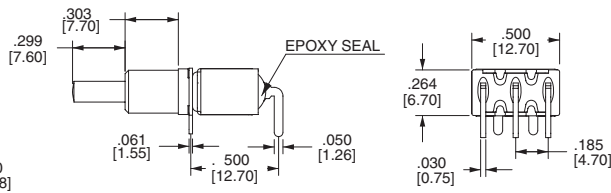

















DOUBLE POLE

PC MOUNTING




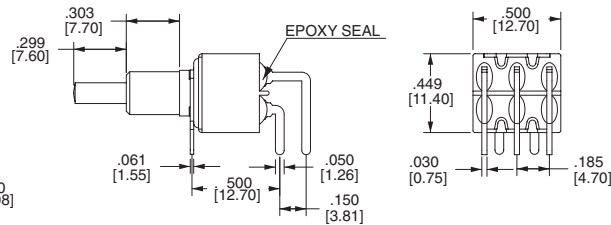



3MA-Series Dimensional Specifications: in. [mm]

TERMINATION

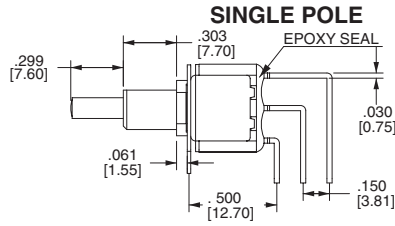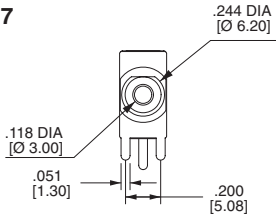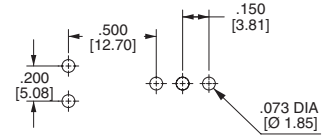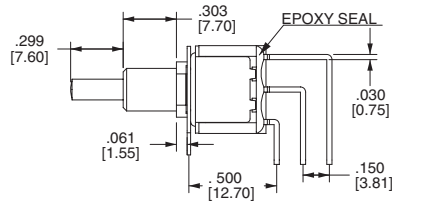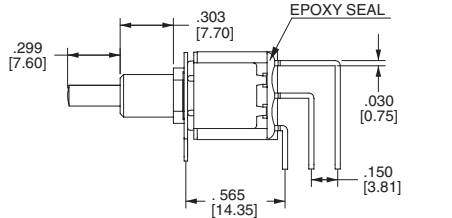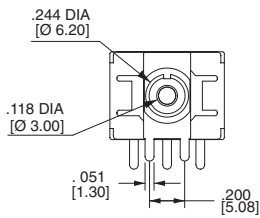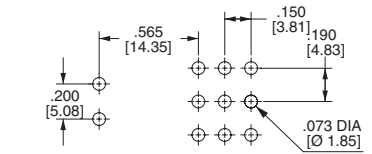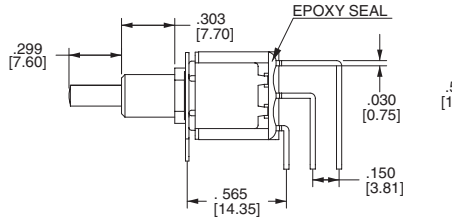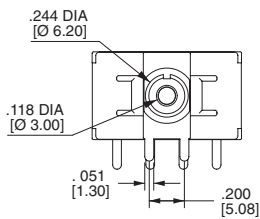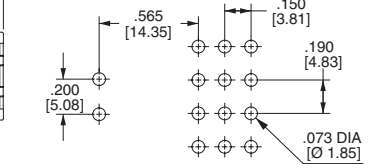M7

PC MOUNTING

DOUBLE POLE

PC MOUNTING

THREE POLE

PC MOUNTING

FOUR POLE

PC MOUNTING

VS2-VS3

OPTION CODE	DIM. "A"
VS2	.460 [11.68]
VS3	.630 [16.00]


VS4-VS5

OPTION CODE	DIM. "A"
VS4	.460 [11.68]
VS5	.630 [16.00]

