



DESCRIPTION: M5 FEMALE - PANEL MOUNT (FRONT) - SOLDER CUP - 2 POSITION

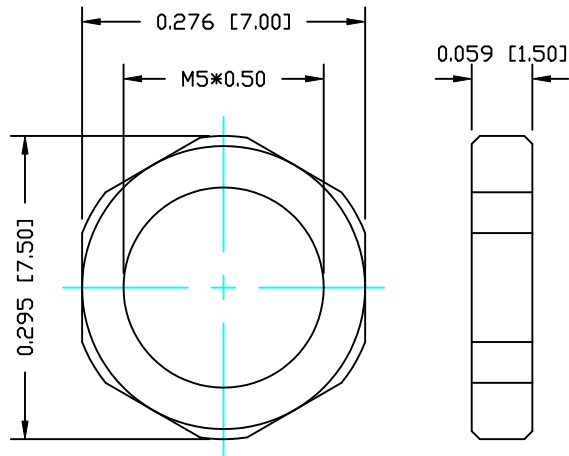

NUT

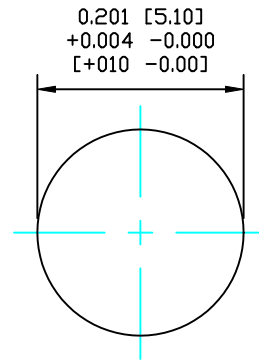

RECOMMENDED
PANEL CUTOUT

NOTE:

MATERIAL

HOUSING:
CONTACT:
NUT:
SHELL:
O-RING:

PBT UL94V-0, BLACK
BRASS
BRASS
BRASS
NBR, BLACK

FINISH

CONTACT:

GOLD FLASH (0.8-1.0)µm
OVER 50µm NICKEL
NICKEL PLATED
NICKEL PLATED




ELECTRICAL

RATED CURRENT:
RATED VOLTAGE:
WATER PROOF:

1A
60V
IP67

ENVIRONMENT

OPERATION TEMPERATURE: -40°C TO +85°C
WIRE GAUGE: 26-28 AWG

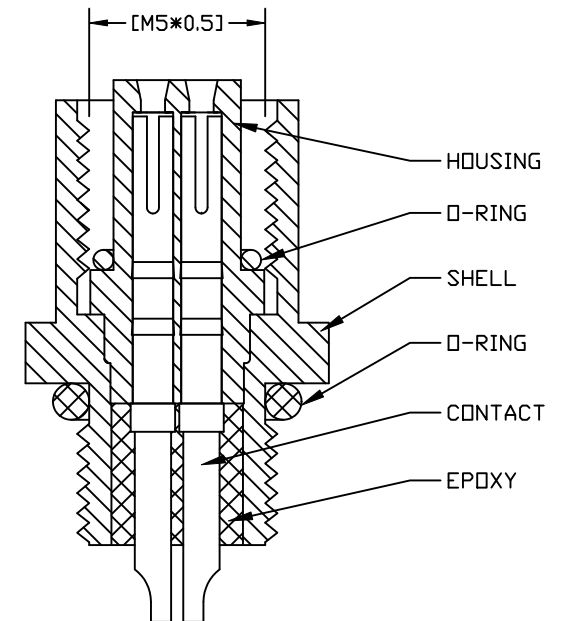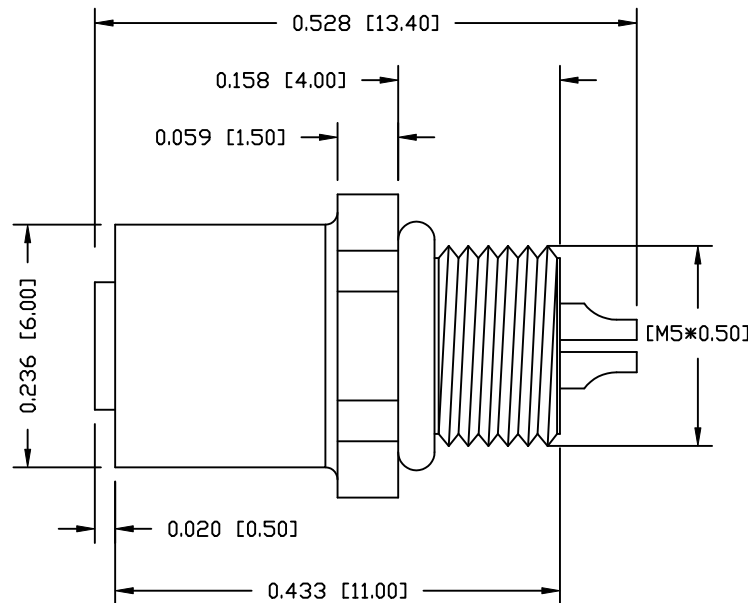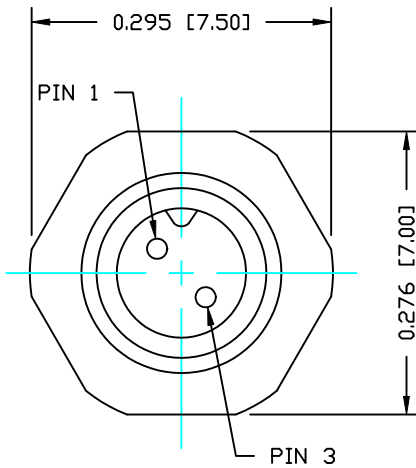

RoHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

01-09-15

CHECKED:

DATE:

NorComp

SCALE:

NTS

SHEET

OF

1 1

REV

0

DWG NO.

851-002-203R001