
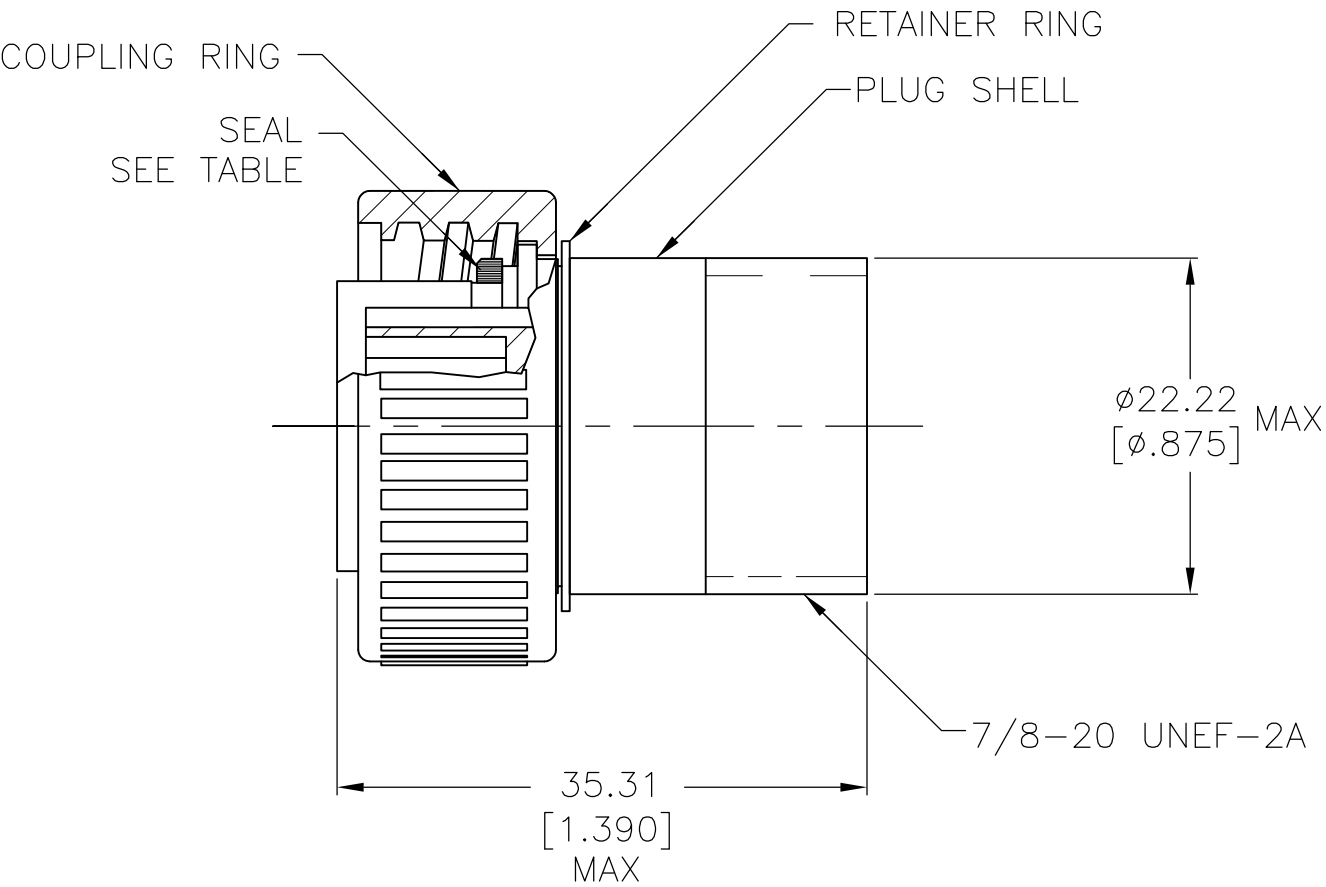


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J1	REVISED PER ECO-16-004800	10SEP2016	NK	MZ

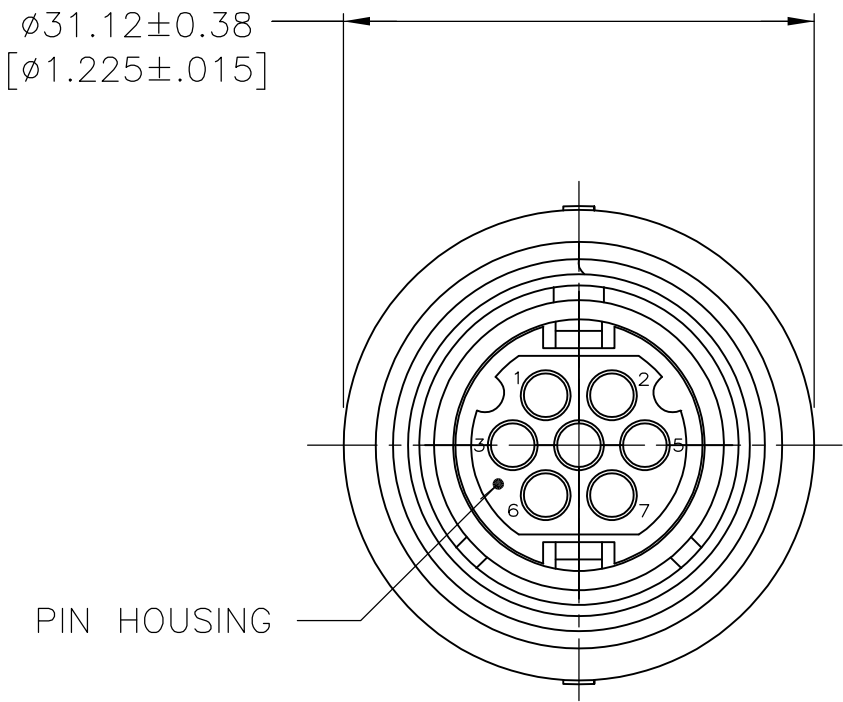


- 1 THIS CONNECTOR ACCEPTS SEVEN (7) SIZE 16 MULTIMATE PIN CONTACTS, MAXIMUM WIRE INSULATION DIA = 2.67 [.105].
- 2 THIS CONNECTOR MATES WITH AMP P/N 208717-1.
- 3 AMP P/N AND DATE CODE TO BE LOCATED ON COUPLING RING.
- 4

NICKEL PER QQ-N-290 OVER COPPER PER MIL-C-14550.
- 5

ZINC PER QQ-Z-363.

OBSOLETE	YES	208716-2
	NO	208716-1
	SEAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.HARDY	05/20/94	 TE Connectivity			
DIMENSIONS: INCHES		CHK R.STONE	05/26/94	NAME PLUG ASSEMBLY, REVERSE SEX, SERIES 1, 14-7, CMC			
		APVD A.FRANTUM	07/13/94				
		PRODUCT SPEC —					
		APPLICATION SPEC —					
		WEIGHT					
MATERIAL PIN HSG: THERMOPLASTIC, BLACK SEAL: FLUOROCARBON ELASTOMER RTNR RING: STAINLESS STEEL CPLG RING:  PLUG SHELL: 		FINISH CPLG RING:  PLUG SHELL: 		SIZE A3	CAGE CODE 00779	DRAWING NO C-208716	RESTRICTED TO —
CUSTOMER DRAWING				SCALE 2:1	SHEET 1 OF 1	REV J1	