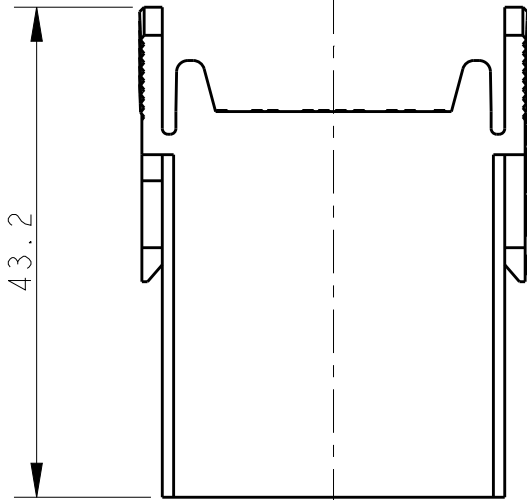
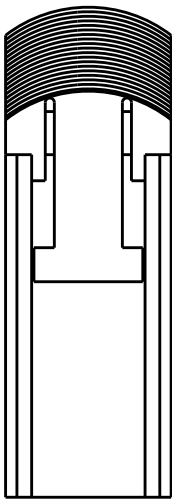
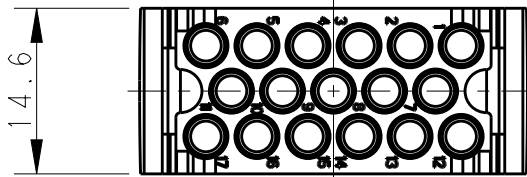
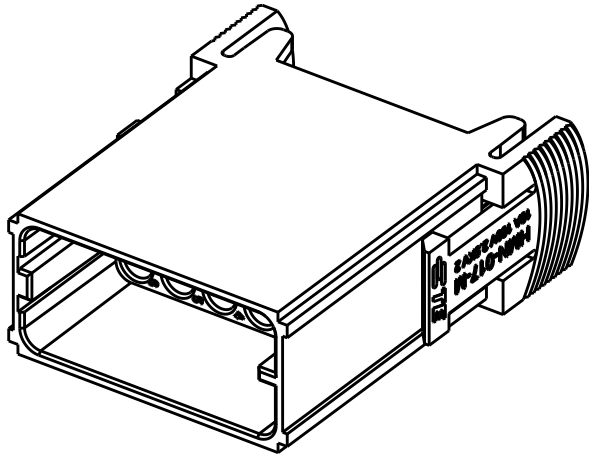



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW

- NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 160V
RATED CURRENT: 10A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 2.5KV
POLLUTION DEGREE: 2
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14~2.5 mm² (26~14 AWG)
CONTACT TYPE: CRIMP CONTACT
 2. CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING: T20200X10XX000)

- 注释:
1. 技术参数:
绝缘材料: PC
额定电压: 160V
额定电流: 10A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 2.5KV
污染等级: 2
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14~2.5 mm² (26~14 AWG)
接线类型: 冷压接
 2. 端子需要单独订购.
(订货号参考图面: T20200X10XX000)

T2111172101-007	HMN-017-M	HMN-017 MALE MODULE INSERT HMN-017模块公插			
PART NUMBER 料 号		PART DESCRIPTION 描 述			
DWN	19SEP2017	 TE Connectivity			
CHK	19SEP2017				
APVD	19SEP2017				
PRODUCT SPEC	108-137062				
APPLICATION SPEC	114-137062	NAME		HMN-017-M	
WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
Customer Drawing		A3	00779	©-T2111172101007	-
		SCALE	3:2	SHEET	1 OF 1
				REV	B

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
MATERIAL	FINISH
-	-
-	-