
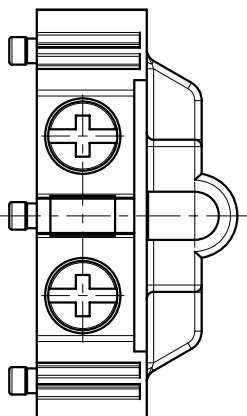
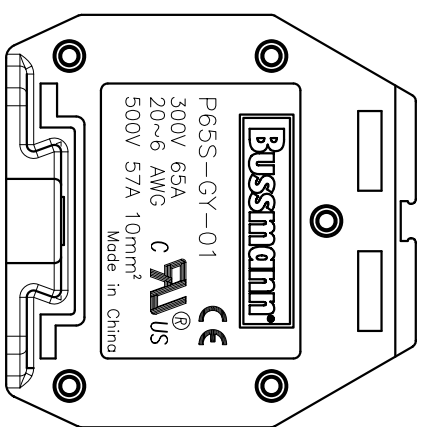


REV.	DESCRIPTION	REVISION	DATE	BY.	ECN NO.
------	-------------	----------	------	-----	---------

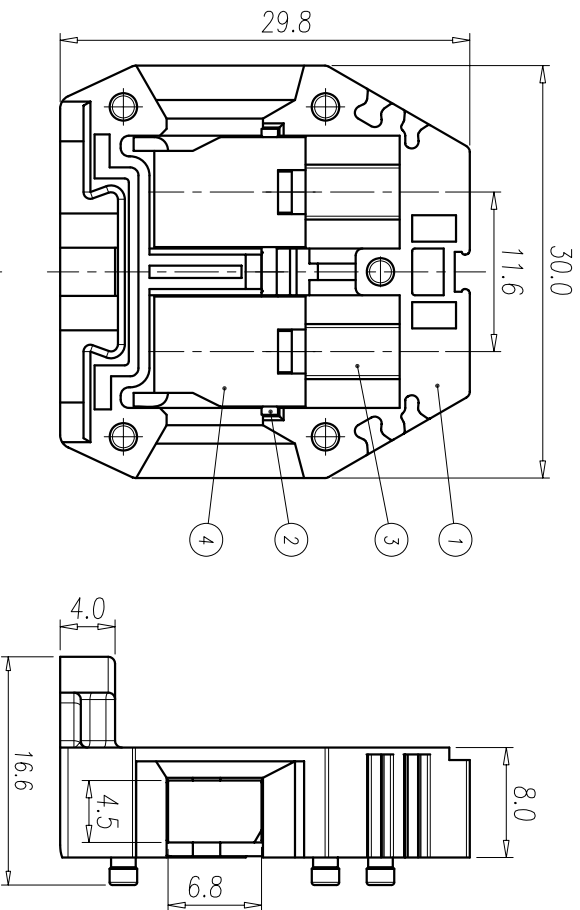

NOTES:

- 1.Rating:UL 300V 65A IEC500V 57A
- 2.Insulation Withstand Voltage: AC2000 V for 1 minute
- 3.Insulation Resistance: Min 500MΩ at DC1000V
- 4.Usable Temperature Range: -40°C~+105°C
- 5.Screw Torque Value:1.2N-m(10.4lb-in)
- 6.Suitable Electric Wire:UL 20~6 AWG
- 7.RoHS compliant (IEC 1.5~10mm²)
- 8.Screw M4

MODEL VERSION		MODEL SOURCE FILE	
MATERIAL:	UNLESS OTHERWISE SPECIFIED	CONFIDENTIAL. The information contained in this document is the property of Cooper Industries, Inc. It is not for public disclosure. Possession of the information does not convey any right to loan, sell or disclose the information. Unauthorized reproduction or use of the information is prohibited. This document is to be returned to Cooper Industries, Inc. upon completion of the purpose for which it is loaned or upon request.	
	FINISH:		
TITLE:		P65S-GY-01	
DRAWING NO.		P65S-GY-01	
V K		O E/1201 O J/1208 O S E O 4062 O 2010	
O 4063		O 4217 O N/1204 O S P O 4094	
O D		O 4219 O S B O U O X	

ITEM	NAME OF PART	MATERIAL	NOTES
4	WIRE CAGE	STEEL	M4 Zn Plated
3	SCREW	STEEL	M4 Zn Plated
2	CONDUCTOR	COOPER-ALLOY	Tin Plated
1	HOUSING	PA66	UL94-V0

COOPER Bussmann
St. Louis MO 63178
COOPER Man Europe Co., Ltd.
UL 85, Any, Korea High-Tech Zone
Yuan 44, 231 8824, 1869
Fax: 86 053 8822 9227