



**600HH005**  
**MIL-C-38999 Series IV**  
**Plug and Receptacle Holder**

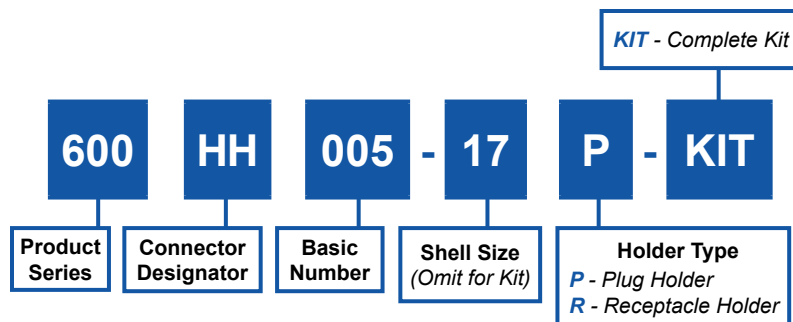

**NO POLARIZATION REQUIRED**

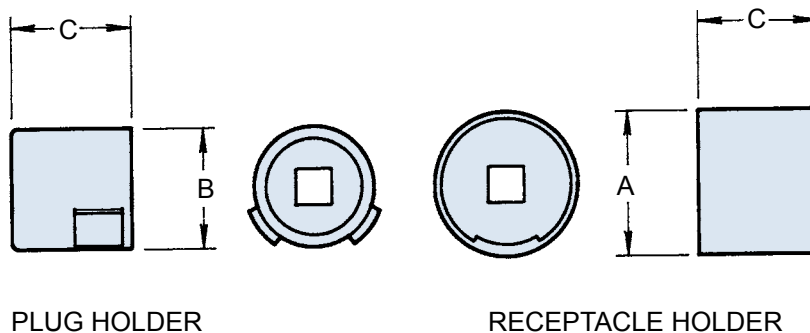

| Shell Size |           | Max. Recommended<br>Torque (Inch Pounds) | A Dia.<br>Max. | B Dia.<br>Max. | C Dim.<br>Max. |
|------------|-----------|------------------------------------------|----------------|----------------|----------------|
| Com'l      | Mil. Ref. |                                          |                |                |                |
| 11         | B         | 80                                       | .83 (21.1)     | .515 (13.1)    | 1.28 (32.5)    |
| 13         | C         | 110                                      | .95 (24.1)     | .650 (16.5)    | 1.28 (32.5)    |
| 15         | D         | 120                                      | 1.07 (27.2)    | .775 (19.7)    | 1.28 (32.5)    |
| 17         | E         | 120                                      | 1.20 (30.5)    | .901 (22.9)    | 1.28 (32.5)    |
| 19         | F         | 120                                      | 1.28 (32.5)    | 1.015 (25.8)   | 1.28 (32.5)    |
| 21         | G         | 140                                      | 1.40 (35.6)    | 1.140 (29.0)   | 1.28 (32.5)    |
| 23         | H         | 140                                      | 1.53 (38.9)    | 1.265 (32.1)   | 1.28 (32.5)    |
| 25         | J         | 140                                      | 1.66 (42.2)    | 1.392 (35.4)   | 1.28 (32.5)    |

**APPLICATION NOTES**

1. Metric dimensions (mm) are indicated in parentheses.
2. Material: Case hardened carbon steel with electroless nickel finish.
3. Receptacle and plug holder drives: 1/4" - Shell sizes 11 and 13; 3/8" - Shell sizes 15 and up.