


Photovoltaic connector - PV-FT-CF-C-6-300-BU-SP - 1705198

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Key Commercial Data

| | |
|------------------------|---|
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| GTIN |  4 046356 759335 |
| GTIN | 4046356759335 |


Technical data

Environmental Product Compliance


| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Dimensional drawing



Dimensional drawing

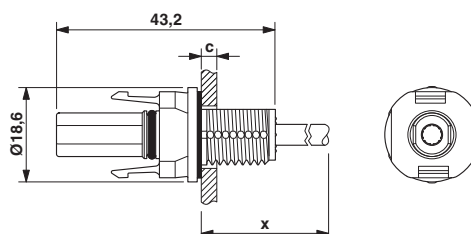

a: anti-rotation protection

b: coding

c: panel thickness - plastic: 2 - 6 mm; metal: 2 - 5 mm

Dimension x = cable length

c: panel thickness - plastic: 2 - 6 mm; metal: 2 - 5 mm

Photovoltaic connector - PV-FT-CF-C-6-300-BU-SP - 1705198

Approvals

Approvals


Approvals


TÜV Rheinland / VDE Zeichengenehmigung / EAC

Ex Approvals

Approval details

| | | |
|--------------------|---|------------|
| TÜV Rheinland | http://www.certipedia.com | R 60126961 |
| Nominal voltage UN | 1500 V | |

| | | | |
|----------------------------|--|---|----------|
| VDE Zeichengenehmigung |  | http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx | 40031807 |
| Nominal voltage UN | | 1500 V | |
| Nominal current IN | | 40 A | |
| mm ² /AWG/kcmil | | 6 | |

| | | |
|-----|---|---------|
| EAC |  | B.01742 |
|-----|---|---------|

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>