
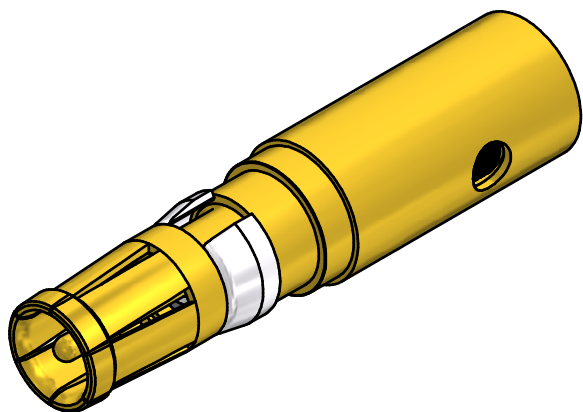
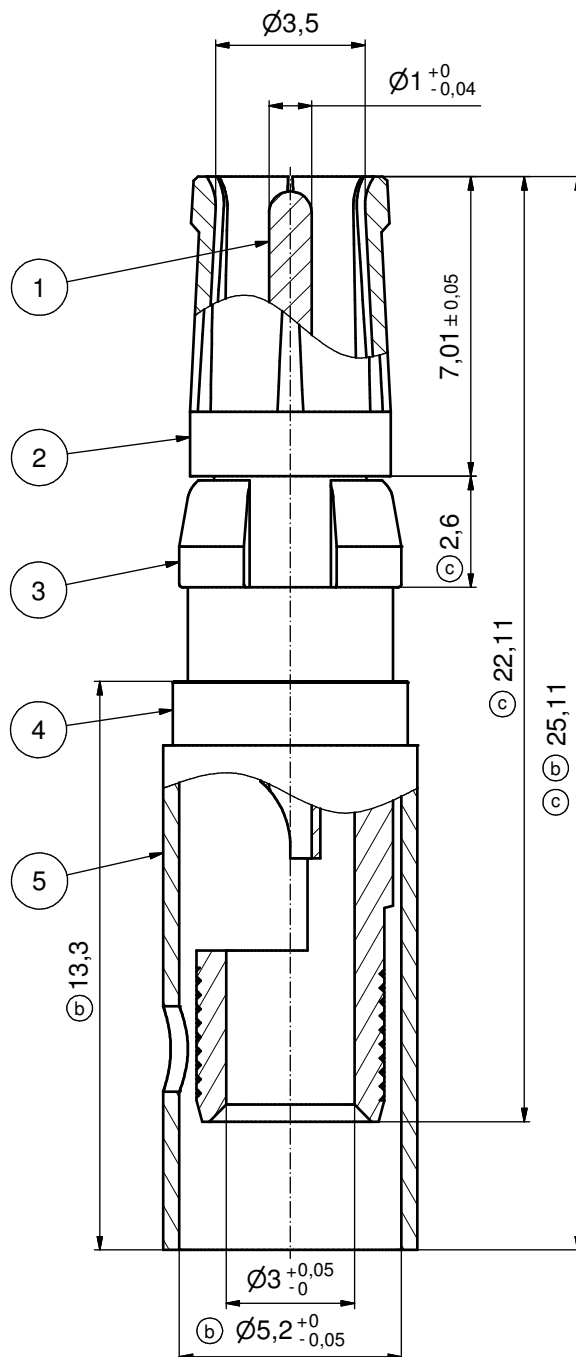


STRIPPING DIMENSIONS

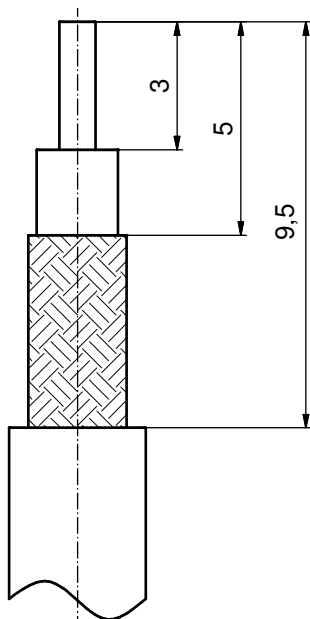

- ASSEMBLY TOOLING:**
1. CENTER CONTACT:
SOLDERED
 2. OUTER CONDUCTOR:
SOLDERED OR CRIMPED
USE CRIMP TOOL: 360X10519X
WITH TOOL INSERT: 360X11029X
INSERT CAVITY A: HEX 5.41 / .213"

Part no.	Finish Pos.1	Finish Pos.2	Finish Pos.3	Finish Pos. 4/5
132J20049X	50µin HARD GOLD over min. 50µin NICKEL	30µin HARD GOLD over min. 50µin NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL
132A20049X	GOLD FLASH over NICKEL	GOLD FLASH over NICKEL	NICKEL PLATED	GOLD FLASH over NICKEL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH	DO NOT ALTER CAD DRAWING BY HAND	tolerance				scale: 8:1			
						material: COPPER ALLOY (Pos. 1 - 5)			
						title: COAXIAL CONTACT SOCKET 50 OHM			
						inner conductor for solder termination outer conductor for solder or crimp termination			
1 x d	Ä4764	24.05.2013	K.H.	norm		dwg no:	13K2A029A		
5 x c	Ä4538	13.11.12	Lehmen	d-old		part no:	see table		
1 x b	Ä2535	18.07.06	Lehmen						
a	Original								
rev.	description	date	name						

Directive 2002/95/EC RoHS compliant

CONEC