

WINNIE-O-C

~60° + 20° oval beam with holder C compatible with LEDIL HEKLA

TECHNICAL SPECIFICATIONS:

Dimensions Ø 50.0 mm

Height 19.5 mm

Fastening socket

yes 🕕 **ROHS** compliant






ORDERING INFORMATION:

Component MPQ Box weight (kg) Qty in box MOQ

CN15826_WINNIE-O-C 364 84 0.0 Single lens 28


» Box size:



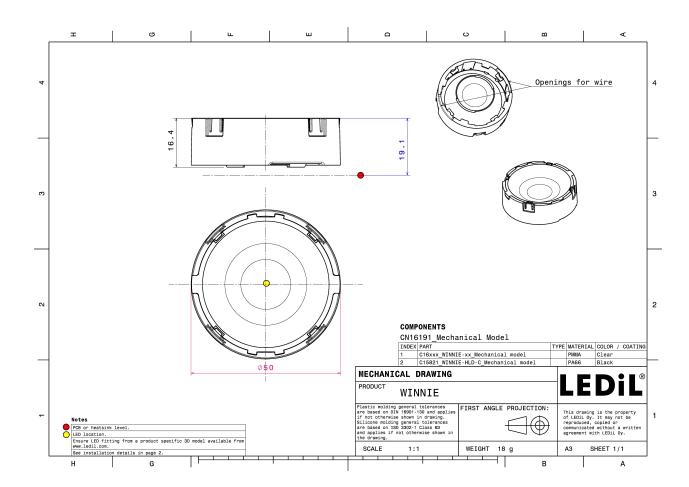




PHOTOMETRIC DATA (MEASURED):

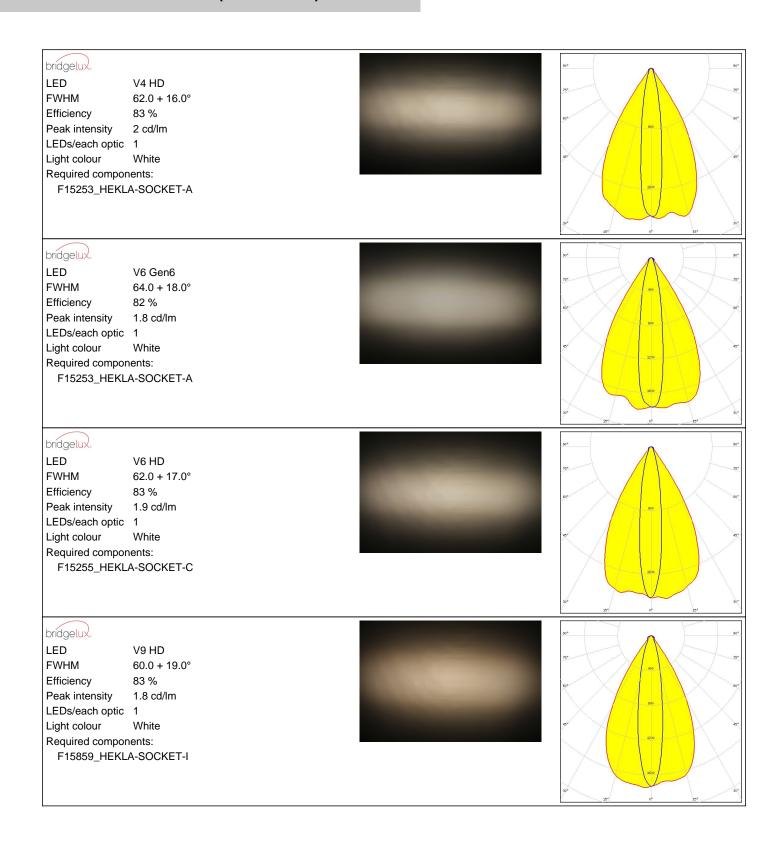



PHOTOMETRIC DATA (MEASURED):

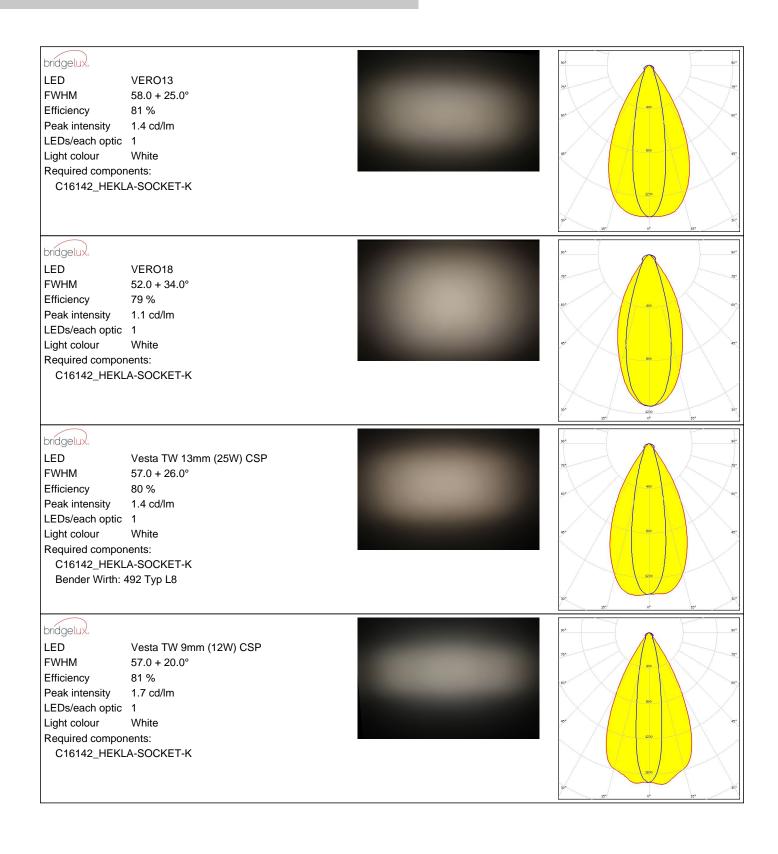



PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED CLC020 Series (Dim-To-Warm)

FWHM 58.0 + 20.0°
Efficiency 81 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K






CITIZEN

LED CLC030 Series (Dim-To-Warm)

FWHM 56.0 + 30.0°
Efficiency 79 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K






CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 63.0 + 23.0°
Efficiency 80 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C






CITIZEN

LED CLU700/701/702
FWHM 63.0 + 18.0°
Efficiency 82 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C







PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED CLU7A2 (LES 4.2mm)

FWHM 62.0 + 17.0°
Efficiency 83 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C






CITIZEN

LED LCN-C01B (Tunable White)

FWHM 58.0 + 20.0°
Efficiency 81 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 481 Typ L8






CREE 🕏

LED CMT14xx
FWHM 61.0 + 22.0°
Efficiency 83 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C






CREE \$

LED CMT19xx
FWHM 57.0 + 28.5°
Efficiency 81 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15859_HEKLA-SOCKET-I








PHOTOMETRIC DATA (MEASURED):

CREE 💠

LED CXA/B 13xx
FWHM 64.0 + 19.0°
Efficiency 83 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15956_HEKLA-SOCKET-J






M LUMILEDS

LED LUXEON CoB 1202HD

FWHM 63.0 + 18.0°
Efficiency 83 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

•




MUMILEDS

LED LUXEON CoB 1202s

FWHM 64.0 + 18.0°
Efficiency 83 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G






DESCRIPTION LUMILEDS

LED LUXEON CoB 1204HD

FWHM 61.0 + 21.0°
Efficiency 83 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15858_HEKLA-SOCKET-H








PHOTOMETRIC DATA (MEASURED):



LED LUXEON CoB 1205HD

FWHM 59.0 + 24.0°
Efficiency 83 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15858_HEKLA-SOCKET-H






MILEDS

LED LUXEON CX Plus CoB - HD S01H4

FWHM 61.0 + 16.0°
Efficiency 83 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla






MATERIAL PROPERTY OF THE PROP

LED LUXEON CX Plus CoB - HD S01H6 / HD S02H6

FWHM 61.0 + 16.0°
Efficiency 83 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla






DESCRIPTION LUMILEDS

LED LUXEON CX Plus CoB - HD S04H9 FWHM 60.0 + 20.0°


Efficiency 83 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla







PHOTOMETRIC DATA (MEASURED):

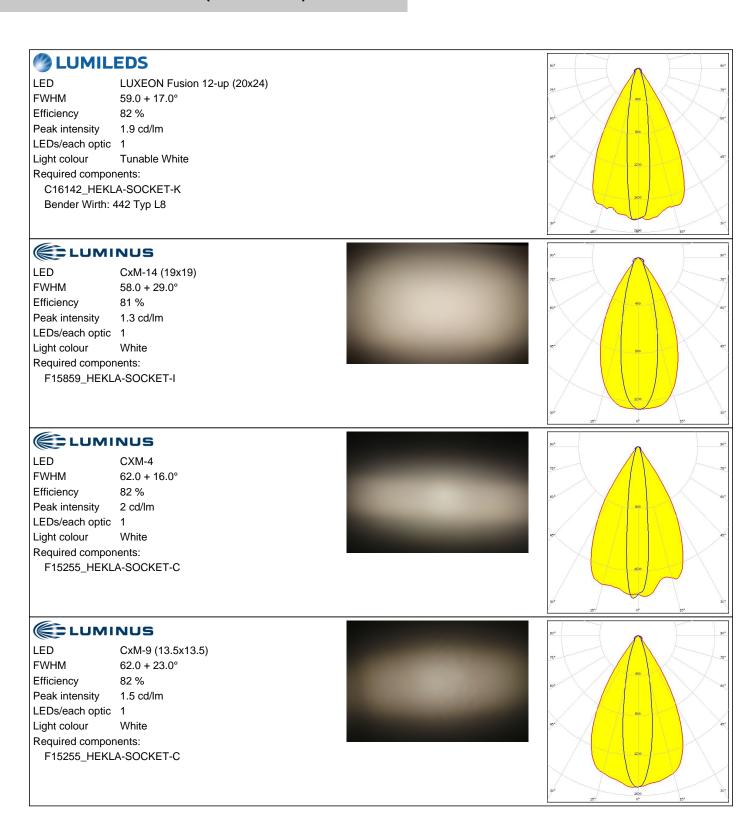




PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo SLM L09 CoB

FWHM 60.0 + 20.0°
Efficiency 83 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H






PHILIPS

LED Fortimo SLM L13 CoB

FWHM 27.0 + 55.0°
Efficiency 81 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142 HEKLA-SOCKET-K

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8






PHILIPS

LED Fortimo SLM L15 CoB

FWHM 54.0 + 30.0°
Efficiency 80 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8






SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM 62.0 + 22.0°
Efficiency 82 %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C








PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LC010C LED **FWHM** $65.0 + 20.0^{\circ}$ 81 % Efficiency Peak intensity 1.6 cd/lm LEDs/each optic 1 Light colour White

F15848_HEKLA-SOCKET-G






Required components:

LED LC010C G2 **FWHM** 62.0 + 17.0° 82 % Efficiency Peak intensity 1.9 cd/lm LEDs/each optic 1 White Light colour

Required components: F15255_HEKLA-SOCKET-C






SAMSUNG

LC016D / LC019D / LC026D / LC033D LED

FWHM $58.0 + 29.0^{\circ}$ Efficiency 80 % Peak intensity 1.2 cd/lm LEDs/each optic 1 Light colour White Required components:

F15859_HEKLA-SOCKET-I






SAMSUNG

Required components:

LED LC020C **FWHM** $63.0 + 21.0^{\circ}$ Efficiency 82 % Peak intensity 1.6 cd/lm LEDs/each optic 1 White Light colour

F15848_HEKLA-SOCKET-G







PHOTOMETRIC DATA (MEASURED):

SAMSUNG LC020C G2 LED **FWHM** $61.0 + 20.0^{\circ}$ 82 % Efficiency Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I **TRIDONIC** LED SLE G7 LES09 **FWHM** 62.0 + 21.0° 82 % Efficiency Peak intensity 1.6 cd/lm LEDs/each optic 1 White Light colour Required components: F15255_HEKLA-SOCKET-C **TRIDONIC** LED SLE G7 LES13 **FWHM** $59.0 + 27.0^{\circ}$ Efficiency 80 % Peak intensity 1.3 cd/lm LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I **TRIDONIC** LED SLE G7 LES15 **FWHM** $58.0 + 29.0^{\circ}$ Efficiency 80 % Peak intensity 1.2 cd/lm LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I




PHOTOMETRIC DATA (MEASURED):

XICATO

LED XOB 14.5 mm
FWHM 58.0 + 29.0°
Efficiency 80 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I






XICATO

LED XOB 9.8 mm
FWHM 62.0 + 22.0°
Efficiency 82 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C







PHOTOMETRIC DATA (SIMULATED):


bridgelux

LED VERO10 FWHM 59.0 + 18.0°

Efficiency 83 %
Peak intensity 1.9 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15616_HEKLA-SOCKET-F



CITIZEN

LED CLL03x/CLU03x

FWHM 58.0 + 26.0° Efficiency 77 %

Peak intensity 1.4 cd/lm LEDs/each optic 1 Light colour White

Required components: F15859_HEKLA-SOCKET-I

CITIZEN


LED CLU710/711

FWHM 61.0 + 18.0°

Efficiency 83 %
Peak intensity 2.1 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I




CREE 🕏

LED CXA/B 15xx FWHM 59.0 + 17.0°

Efficiency 84 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15256_HEKLA-SOCKET-D






PHOTOMETRIC DATA (SIMULATED):

CREE 💠

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM $56.0 + 13.0^{\circ}$ 86 % Efficiency Peak intensity 2.7 cd/lm LEDs/each optic Light colour White Required components:

F15254_HEKLA-SOCKET-B




CREE &

LED CXA/B 1830 **FWHM** 60.0 + 28.0° 79 % Efficiency

Peak intensity 1.3 cd/lm LEDs/each optic 1 White Light colour

Required components: C16142_HEKLA-SOCKET-K

Bender Wirth: 457 Typ L8




WNICHIA

LED COB T-Type **FWHM** $62.0 + 18.0^{\circ}$ Efficiency 83 %

Peak intensity 2.1 cd/lm LEDs/each optic Light colour White Required components:


F15848_HEKLA-SOCKET-G



WNICHIA

LED NFSWE11A **FWHM** 58.0 + 18.0° Efficiency 74 % 1.9 cd/lm Peak intensity LEDs/each optic 30

White Light colour Required components:





PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconducto

LED

Soleriq S13 19x19


FWHM 57.0 + 24.0°

Efficiency 83 %

Peak intensity 1.6 cd/lm LEDs/each optic 1

Light colour White

Required components: F15859_HEKLA-SOCKET-I



OSRAM Opto Semiconductors

Opto Semiconducto

Soleriq S9

FWHM 59.0 + 20.0°

Efficiency 85 %


Peak intensity 1.8 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C



SECUL SEMICONDUCTOR

LED

MJT COB LES 14.5

FWHM 58.0 + 30.0°

Efficiency 80 %

Peak intensity 1.3 cd/lm

LEDs/each optic 1

Light colour White

Required components: F15859_HEKLA-SOCKET-I



LED

MJT COB LES 9.8


FWHM 60.0 + 22.0° Efficiency 83 %

Efficiency 83 % Peak intensity 1.7 cd/lm

LEDs/each optic 1

Light colour White Required components:

F15255_HEKLA-SOCKET-C





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy